



- ダーリントン・トランジスタ2個直列接続
- フリーホイール・ダイオード付
- 絶縁形
- 直流電流増幅率は70以上(定格電流にて)

■等価回路

C1



C3






注1. 1トランジスタ当り。


注2. AC, 1分間。

注3. #印は V_{CE0} (I_c の単位はmA)。


型 名	最 大 定 格											電 氣 的 特 性									
	V_{CBO}	$V_{CEO(SUS)}$	V_{REO}	I_C	I_{CP}	I_B	I_F	P_C		T_j	T_{stg}	V_{CE0}	I_{CBO}		I_{REO}		$V_{CEO(SUS)}$		h_{FE}		
	(V)	$V_{CE0 \#}$ (V)	(V)	(A)	(A)	(A)	(A)	(W)	Total (W)	(°C)	(°C)	(V)	最大 (mA)	V_{CB} (V)	最大 (mA)	V_{EB} (V)	最小 (V)	I_C (A)	最小 (V)	V_{CE} (V)	
																					I_C (A)
2D175M-050	600	450	10	75	150	4.5	75	350	700	150	-40~125	2500	1.0	600	200	10	450	1.0	750	2.5	75
2D175Z-100	1000	1000 #	10	75	150	4.0	75	500	1000	150	-40~125	2500	1.0	1000	200	10	1000 #	1	100	5	75
2D175Z-120	1200	1200 #	10	75	150	4.0	75	500	1000	150	-40~125	2500	1.0	1200	200	10	1200 #	1	100	5	75
2D1100A-120	1200	1200 #	10	100	200	6.0	100	800	1600	150	-40~125	2500	1.0	1200	200	10	1200 #	1	70	5	100
2D1100A-140	1400	1400 #	10	100	200	6.0	100	800	1600	150	-40~125	2500	1.0	1200	200	10	1400 #	20	70	5	100
2D1100D-050	600	450	7	100	200	6.0	100	620	1240	150	-40~125	2500	1.0	600	400	7	450	1.0	100	5	100
2D1100D-100	1000	800	10	100	200	6.0	100	800	1600	150	-40~125	2500	1.0	1000	400	10	800	5.0	100	5	100
2D1100M-050	600	450	10	100	200	6.0	100	620	1240	150	-40~125	2500	1.0	600	400	10	450	1.0	1000	2.5	100
2D1100Z-100	1000	1000 #	10	100	200	5.0	100	800	1600	150	-40~125	2500	2.0	1000	400	10	1000 #	2	100	5	100
2D1100Z-120	1200	1200 #	10	100	200	6.0	100	800	1600	150	-40~125	2500	2.0	1200	400	10	1200 #	2	100	5	100
2D1150A-120	1200	1200 #	10	150	300	8.0	150	1000	2000	150	-40~125	2500	1.0	1200	200	10	1200 #	1	70	5	150
2D1150A-140	1400	1400 #	10	150	300	8.0	150	1000	2000	150	-40~125	2500	1.0	1200	200	10	1400 #	20	70	5	150
2D1150D-050	600	450	7	150	300	9.0	150	690	1380	150	-40~125	2500	1.0	600	400	7	450	1.0	100	5	150
2D1150D-100	1000	800	10	150	300	8.0	150	1000	2000	150	-40~125	2500	1.0	1000	400	10	800	5.0	100	5	150
2D1150M-050	600	450	10	150	300	9.0	150	690	1380	150	-40~125	2500	1.0	600	400	10	450	1.0	1500	2.5	150
2D1150Z-100	1000	1000 #	10	150	300	4.0	150	1000	2000	150	-40~125	2500	2.0	1000	400	10	1000 #	2	100	5	150
2D1150Z-120	1200	1200 #	10	150	300	8.0	150	1000	2000	150	-40~125	2500	2.0	1200	400	10	1200 #	2	100	5	150
2D1200A-050	600	450	10	200	400	10	200	900	1800	150	-40~125	2500	2.0	600	600	10	450	2.0	80	5	200
2D1200D-100	1000	800	10	200	400	8.0	200	1200	2400	150	-40~125	2500	1.0	1000	400	10	800	5.0	100	5	200
2D1240A-055	600	550	6	240	480	10	240	1000	2000	150	-40~125	2500	2.0	600	600	6	550	2.0	70	5	240




(T _i = 25℃)										エミッタ・コレクタ間ダイオード						熱抵抗		等 価 回 路	外形図	記	事	型	名
飽和電圧 (V)		I _C (A)	I _B (A)	スイッチング時間 (μs)			I _{B1} (A)	I _{B2} (A)	I _C (A)	V _F (V)	I _F (A)	t _{rr} (μs)	I _F (A)	V _{BE} (V)	di/dt (A/μs)	R _{th(j-c)} (℃/W)							
V _{CE}	V _{BE}			t _{on}	t _{off}	t _r										トランジスタ部	ダイオード部						
最大	最大	(A)	(A)	最大	最大	最大	(A)	(A)	(A)	最大	(A)	最大	(A)	(V)	(A/μs)	最大	最大						
2.5	3.0	75	0.1	3.0	8	3.0	0.1	-1.5	75	1.8	75	0.6	75	-6	150	0.35	0.85	E 6	M 2 0 8				2D175M-050
2.8	3.5	75	1.0	2.5	12	2.0	1.0	-1.5	75	1.8	75	0.7	75	-6	75	0.25	1.2	E 4	M 2 0 9				2D175Z-100
2.8	3.5	75	1.0	3.0	15	2.0	1.0	-1.5	75	2.0	75	0.8	75	-6	75	0.25	1.2	E 4	M 2 0 9				2D175Z-120
2.5	3.5	100	3.0	3.0	15	3.0	3.0	-9.0	100	2.0	100	0.6	100	-6	100	0.15	0.45	E 2	M 2 0 7	UL : E 8 2 9 8 8 (M)			2D1100A-120
2.5	3.5	100	3.0	3.0	15	3.0	3.0	-9.0	100	2.0	100	0.6	100	-6	100	0.15	0.45	E 2	M 2 0 7				2D1100A-140
2.0	2.5	100	2.0	3.0	12	4.0	2.0	-2.0	100	1.5	100	0.6	100	-6	100	0.2	1.6	C 3	M 2 0 5				2D1100D-050
2.5	3.5	100	2.0	2.5	15	3.0	2.0	-6.0	100	1.8	100	0.5	100	-6	100	0.15	0.45	E 2	M 2 0 7				2D1100D-100
2.5	3.0	100	0.1	3.0	8	3.0	0.1	-2.0	100	1.8	100	0.6	100	-6	200	0.2	0.8	E 6	M 2 0 5				2D1100M-050
2.8	3.5	100	1.4	3.0	15	2.0	1.4	-2.0	100	2.0	100	0.8	100	-6	100	0.156	0.65	E 5	M 2 1 0				2D1100Z-100
2.8	3.5	100	1.4	3.0	15	2.0	1.4	-2.0	100	2.0	100	0.8	100	-6	100	0.156	0.65	E 5	M 2 1 0				2D1100Z-120
2.5	3.5	150	4.0	3.5	15	3.0	4.0	-12	150	2.0	150	0.6	150	-6	150	0.125	0.31	E 2	M 2 0 7	UL : E 8 2 9 8 8 (M)			2D1150A-120
2.5	3.5	150	4.0	3.0	15	3.0	4.0	-12	150	2.0	150	0.6	150	-6	150	0.125	0.31	E 2	M 2 0 7				2D1150A-140
2.0	2.5	150	3.0	3.0	12	4.0	3.0	-3.0	150	1.5	150	0.6	150	-6	150	0.18	0.6	C 3	M 2 0 5				2D1150D-050
2.5	3.5	150	3.0	2.5	15	3.0	3.0	-9.0	150	1.8	150	0.5	150	-6	150	0.125	0.31	E 2	M 2 0 7				2D1150D-100
2.5	3.0	150	0.1	3.0	8	3.0	0.1	-3.0	150	1.8	150	0.6	150	-6	300	0.18	0.60	E 7	M 2 0 5				2D1150M-050
2.8	3.5	150	2.0	2.5	12	2.0	2.0	-3.0	150	1.8	150	0.7	150	-6	150	0.125	0.60	E 5	M 2 1 0				2D1150Z-100
2.8	3.5	150	2.0	3.0	15	2.0	2.0	-3.0	150	2.0	150	0.8	150	-6	150	0.125	0.60	E 5	M 2 1 0				2D1150Z-120
2.0	2.5	200	5.0	2.0	12	3.0	5.0	-5.0	200	1.8	200	0.6	200	-6	200	0.14	0.45	C 5	M 2 0 7				2D1200A-050
2.5	3.5	200	4.0	2.5	15	3.0	4.0	-12	200	1.8	200	0.5	200	-6	200	0.1	0.31	E 2	M 2 0 7				2D1200D-100
2.0	2.5	240	7.0	2.0	12	3.0	7.0	-7.0	240	1.5	240	0.6	240	-6	240	0.125	0.3	C 3	M 2 0 7				2D1240A-055



FD-9



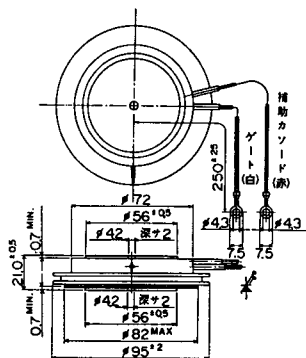


FD-10

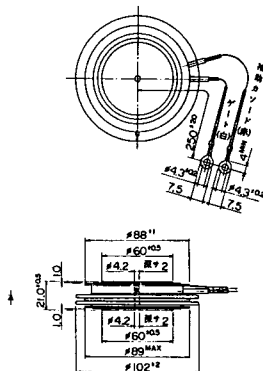


FD-11







FD-12

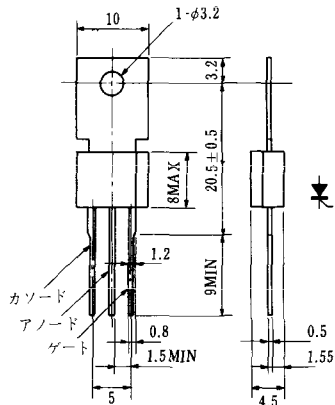

Unit in mm(inch)




Unit in mm(inch)

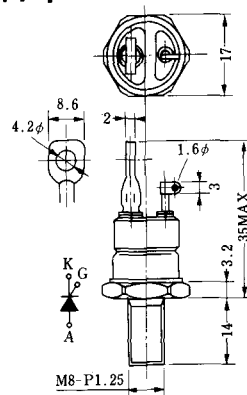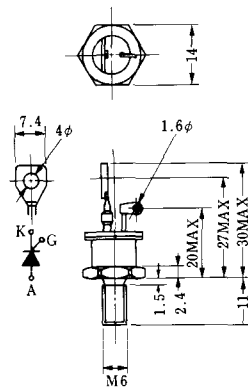


K_C

- ①アノード
②カソード
③ゲート

H-9A




H-9B




- ① アノード
② カソード
③ ゲート


H-10

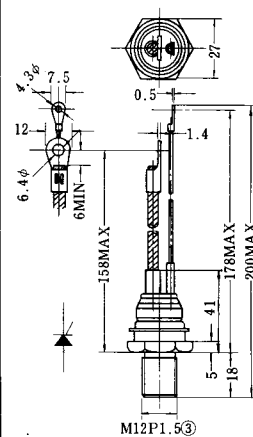


H-11

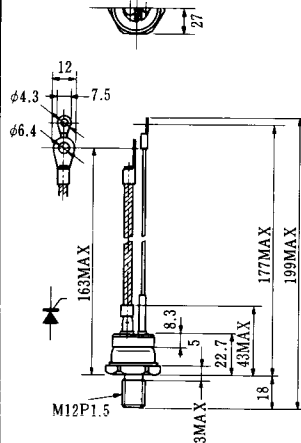


H-12

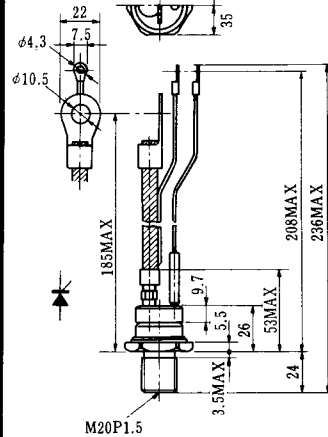


H-13

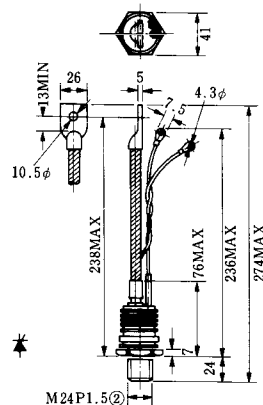


H-14




H-15




H-16

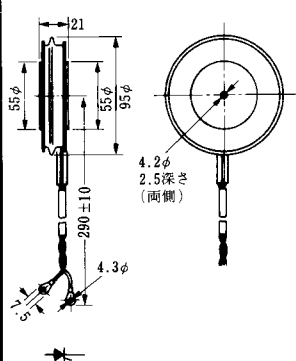


H-17

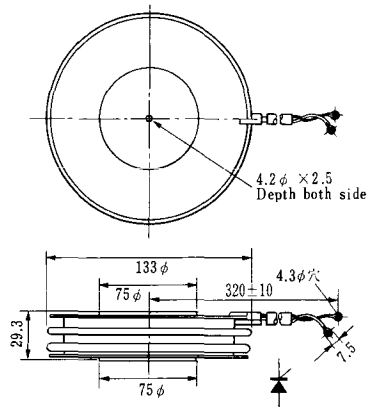


H-18




H-19

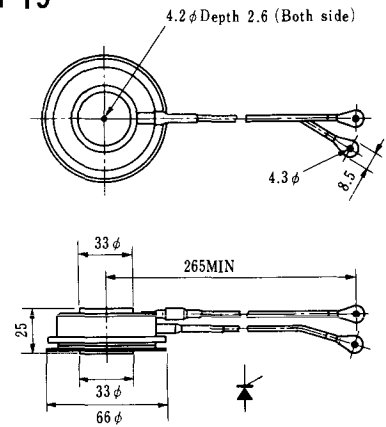


H-20

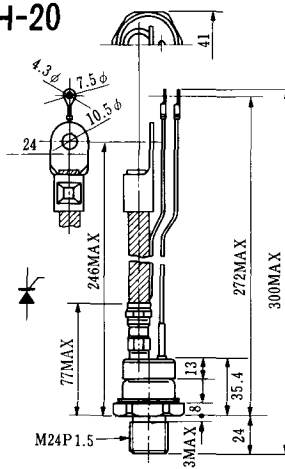


H-21

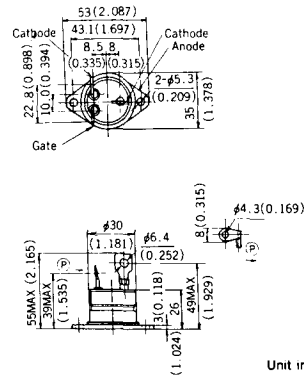


H-22

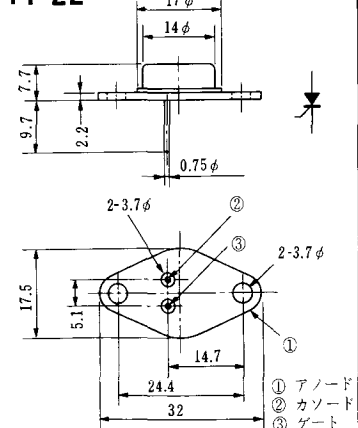


H-23

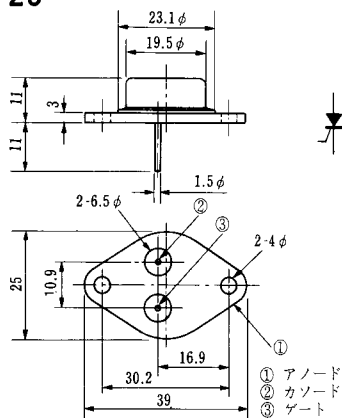


H-24

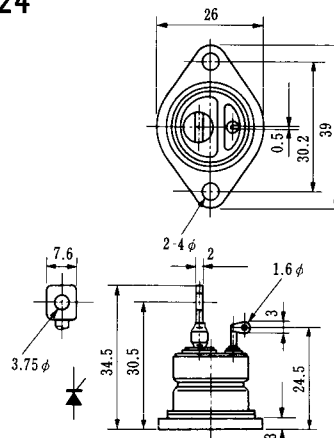

H-25

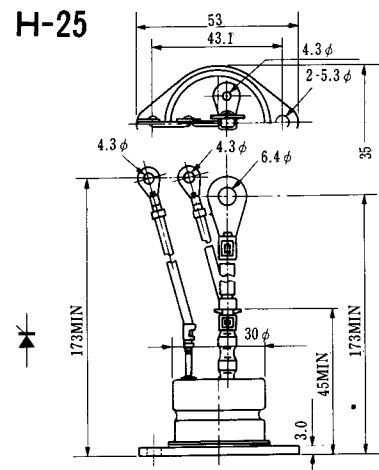


H-26

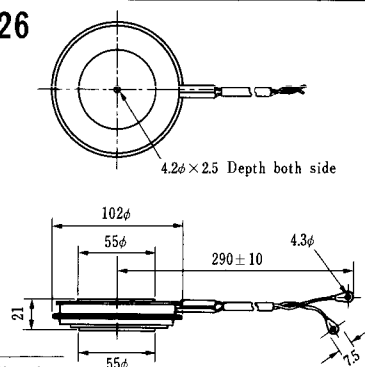

Type	Direction of polarity
CA12	


H-27



Type	Direction of polarity
CF11V	


(注) CC11V: 400 $\pm$ 10
CF11V: 250 $\pm$ 10

H-28

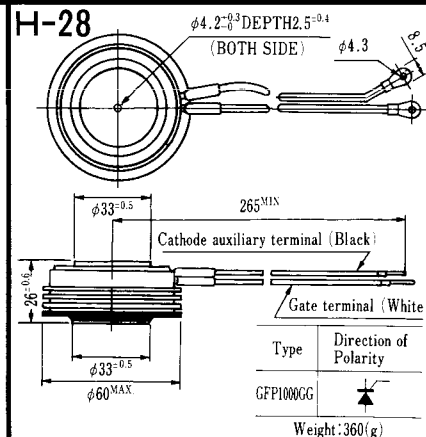


Note: The thickness is a dimension in press at the rated mounting force.

H-29

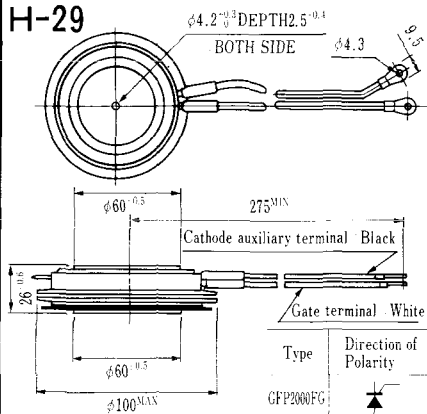


Note : The thickness is a dimension in press at the rated mounting force.

H-30

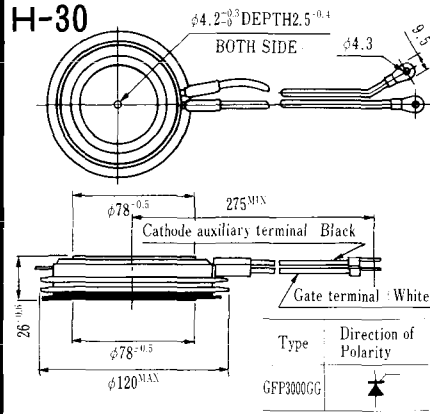



Note : The thickness is a dimension in press at the rated mounting force.

HT-1

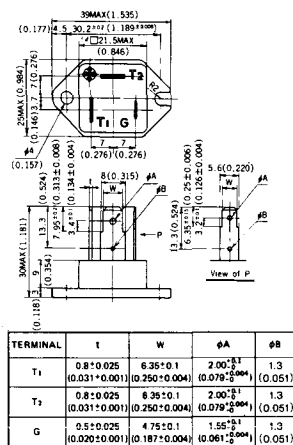


Unit in mm (inch)


HT-2

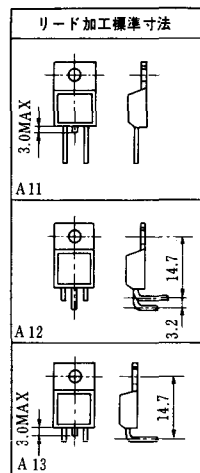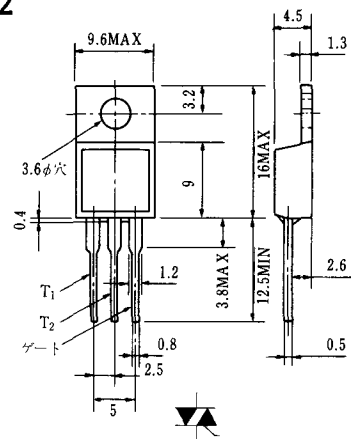


HT-3

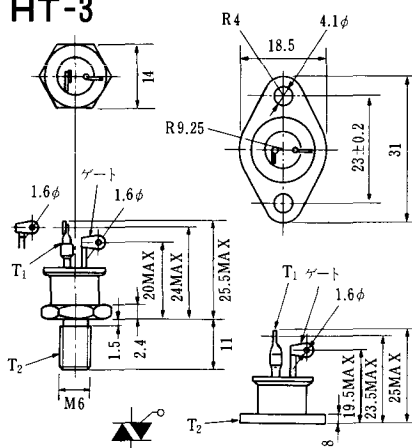

HT-4

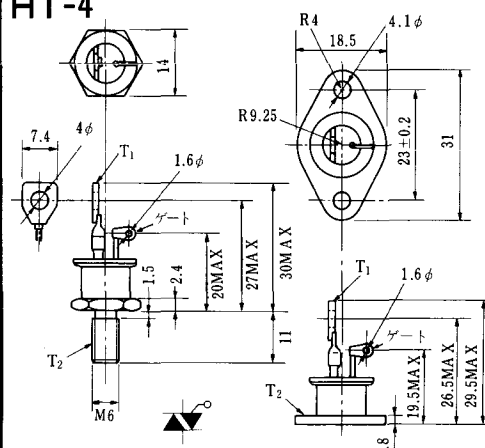


HT-5

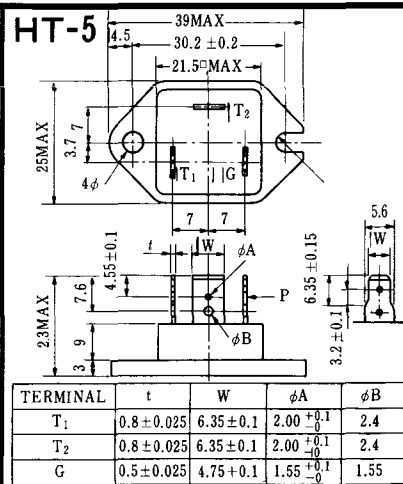


《寸法図単位：mm》


M-1

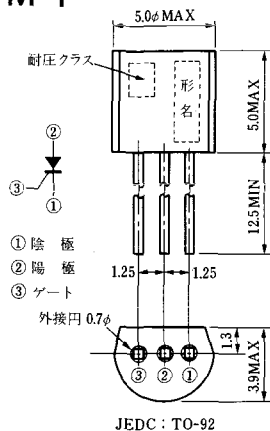


M-2

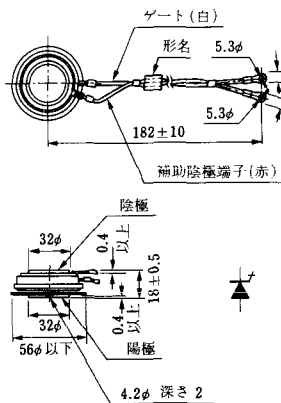


M-3

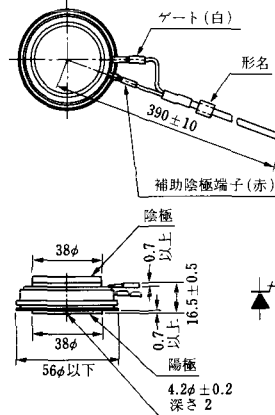


M-4

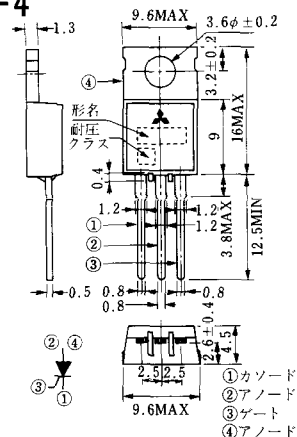


M-5

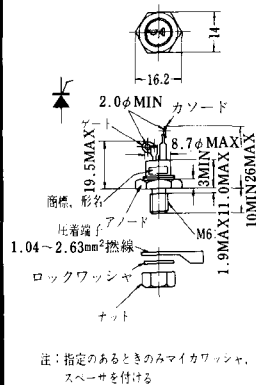


M-6

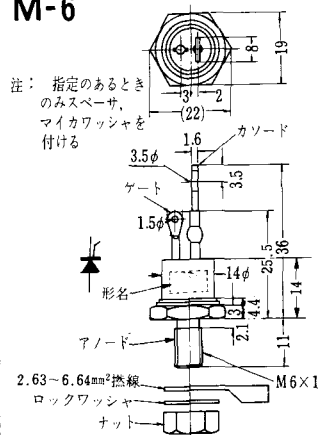


M-7

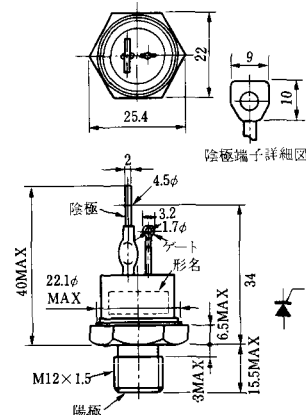


M-8

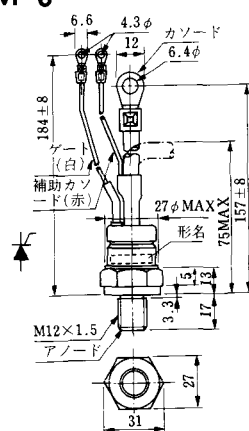


M-9

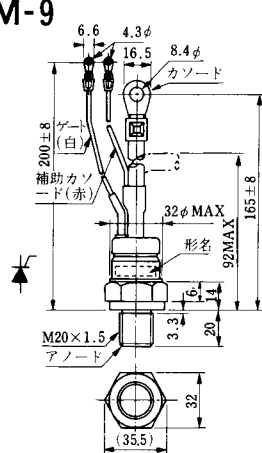


M-10

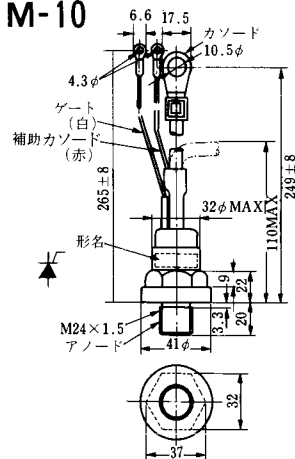


M-11

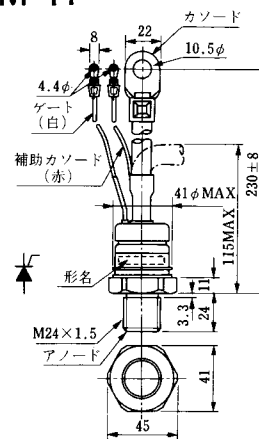


M-12

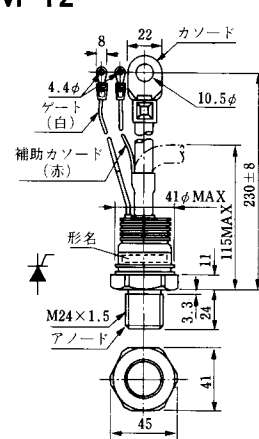


M-13

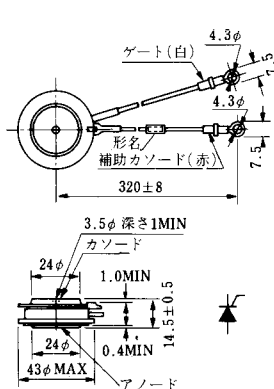


M-14

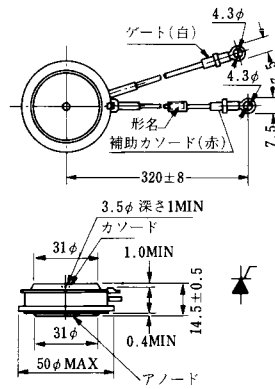


M-15

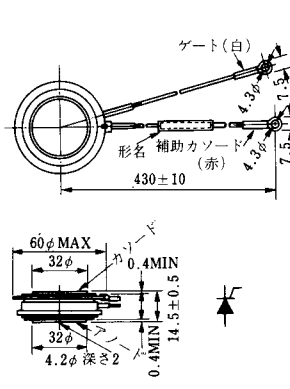


M-16

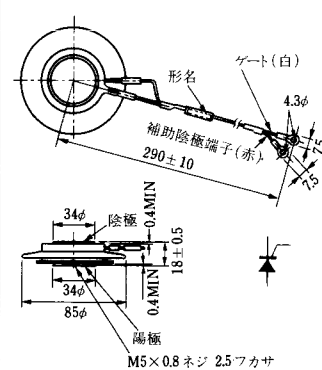


M-17

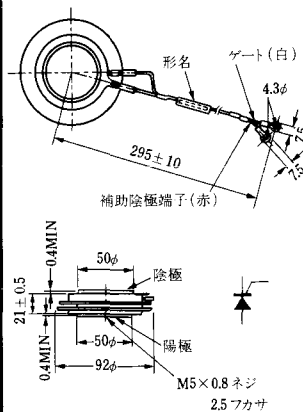


M-18

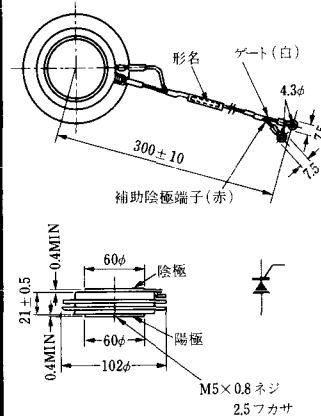


M-19

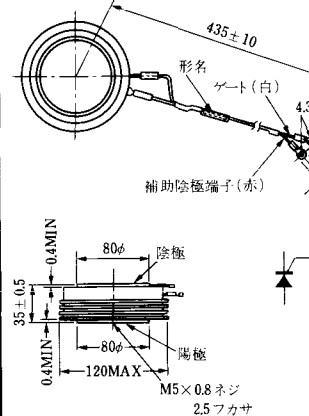


M-20

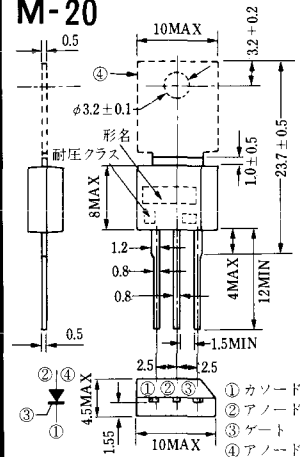


M-21

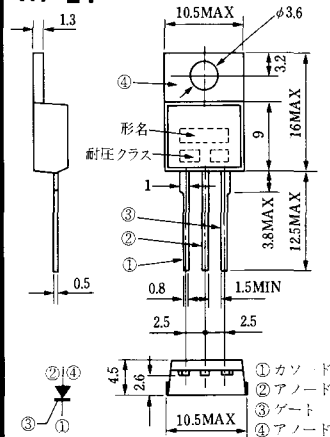


M-22

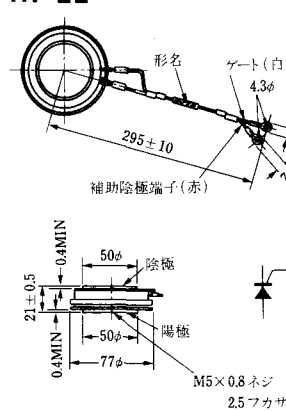


M-23

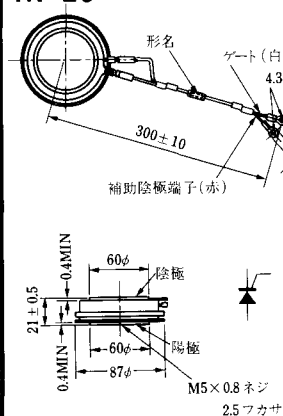


M-24

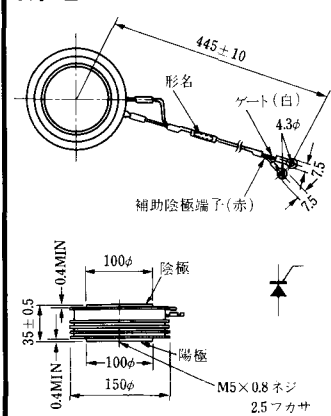


M-25

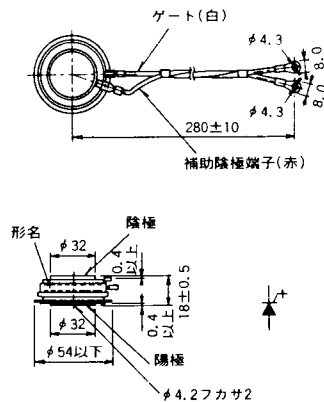


M-26

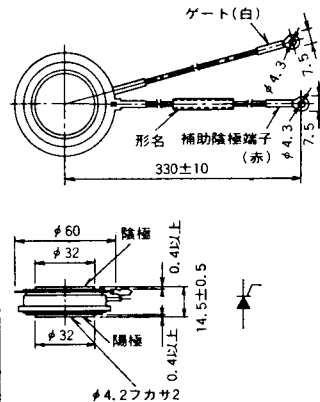


M-27

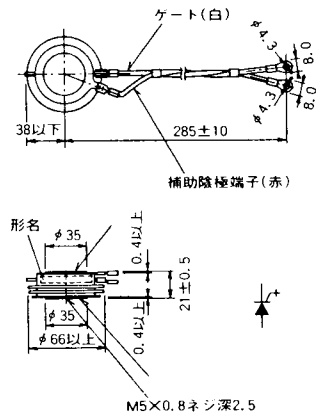


M-28

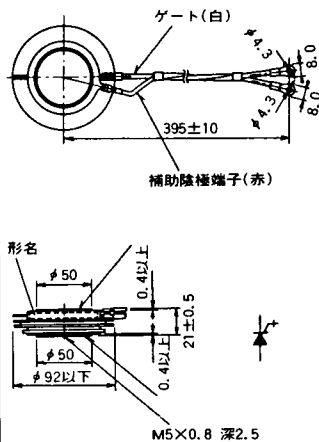


M-29

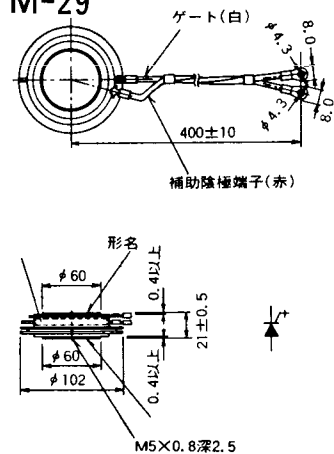


M-30

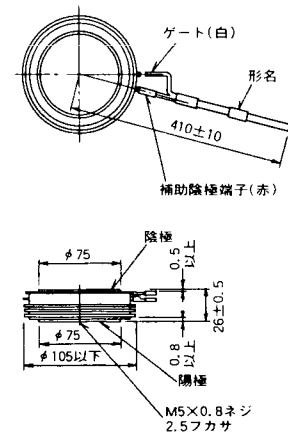


M-31

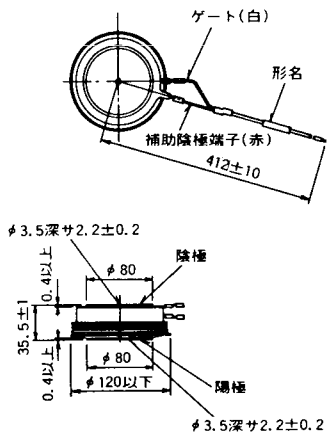


M-32

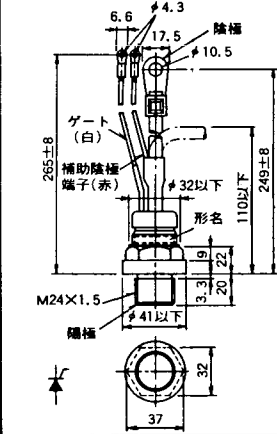


M-33

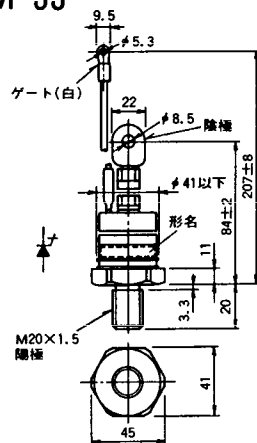


M-34

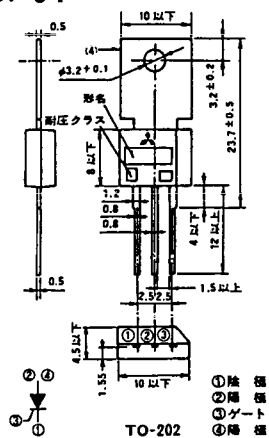


MT-1

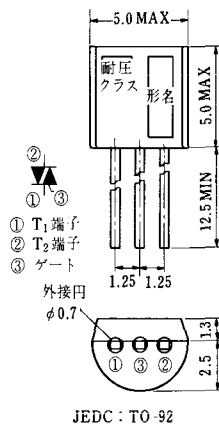


MT-2

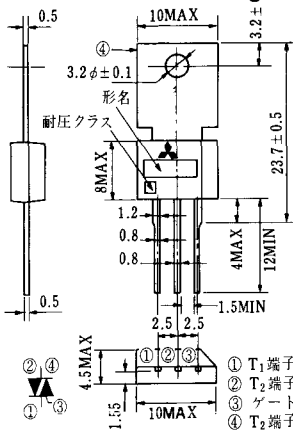


MT-3

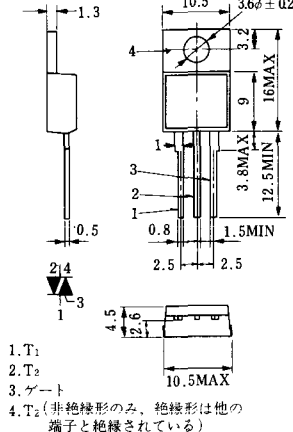


MT-4

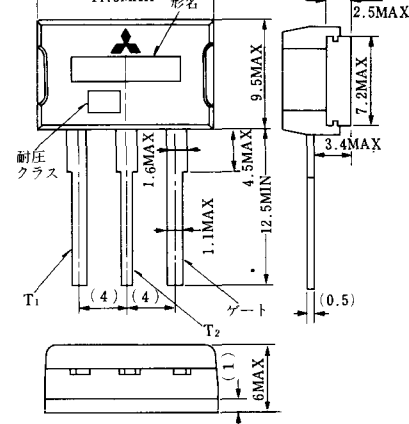


MT-5

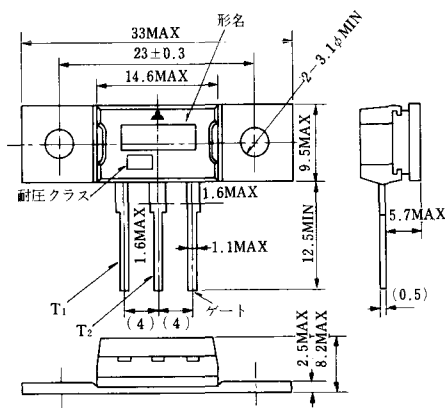


MT-6

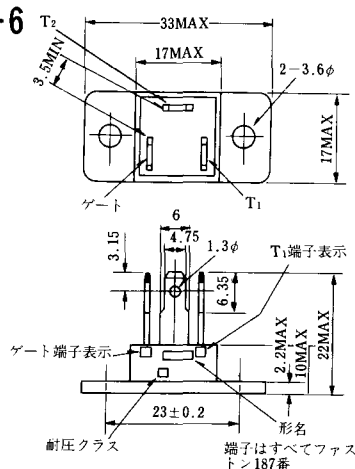


MT-7

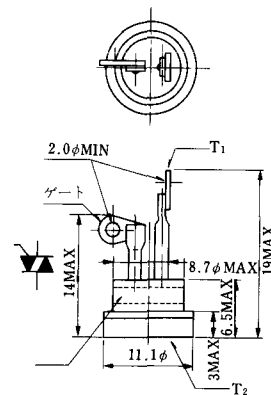


MT-8

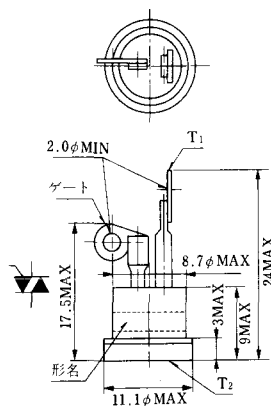


MT-9

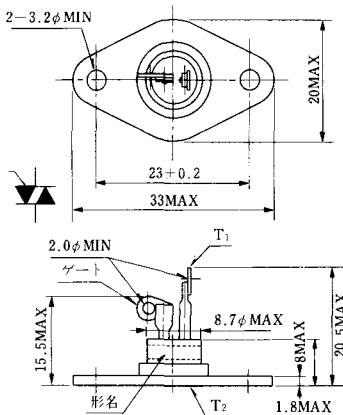


MT-10

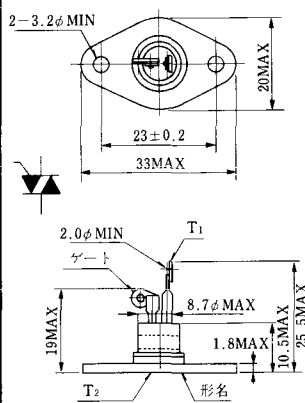


MT-11

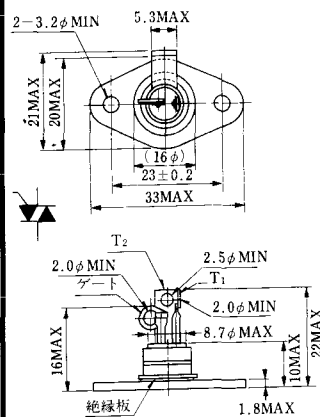


MT-12

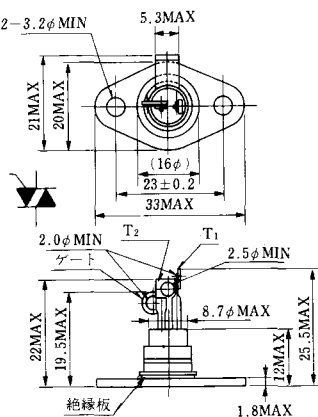


MT-13

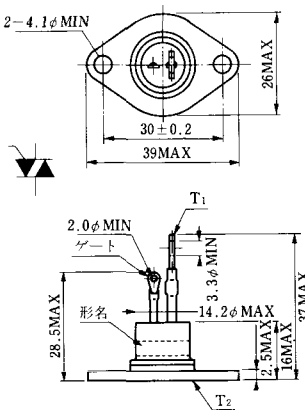


MT-14

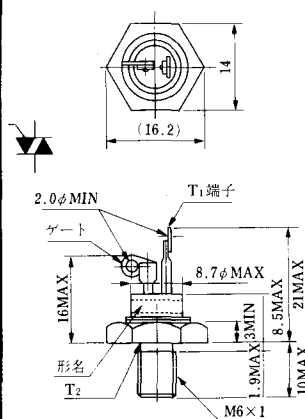


MT-15

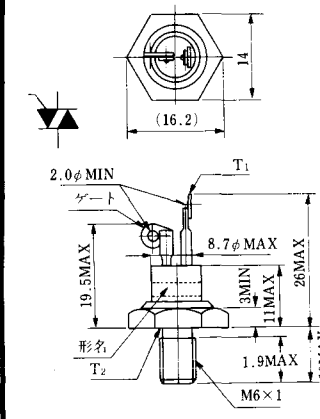


MT-16

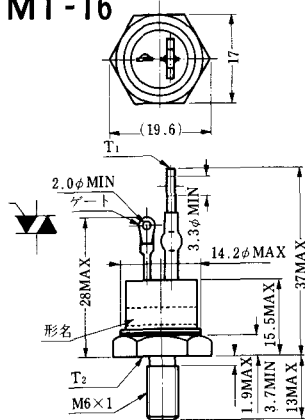


MT-17

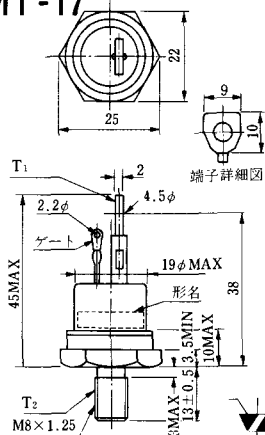


MT-18

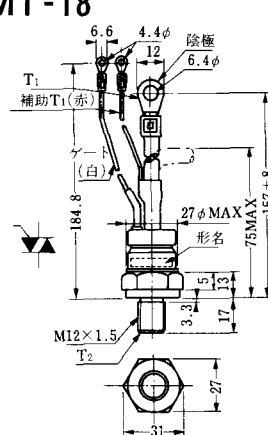


MT-19

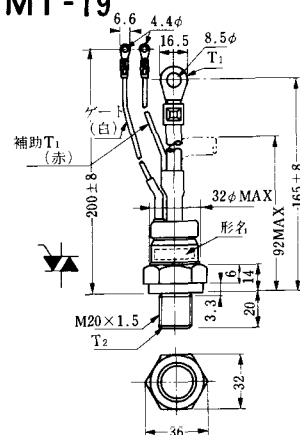


MT-20

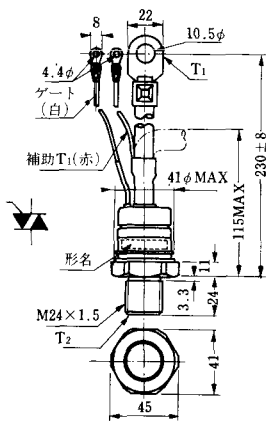


MT-21

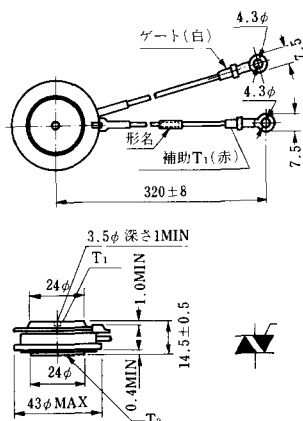


MT-22

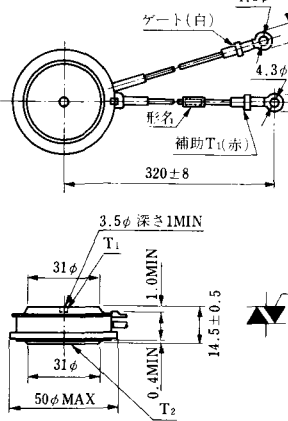

MT-23

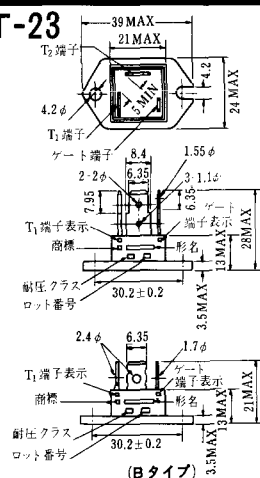


MT-24



- ① T1 端子
 - ② T2 端子
 - ③ ゲート 端子
 - ④ T2 端子
- TO - 3P


N-1

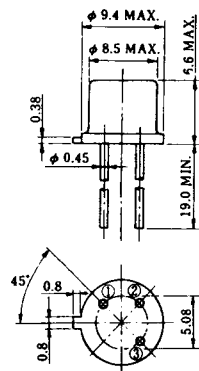

電極接続

- ① カソード
- ② ゲート
- ③ アノード


N-2



電極接続

- ① ヤート
- ② アノード
- ③ カソード


N-3

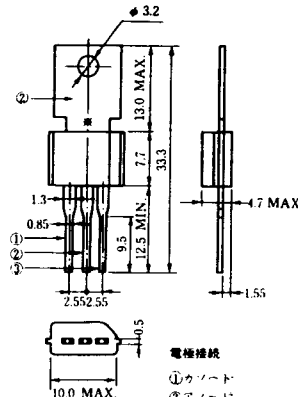

電極接続

- ① カソード
- ② アノード
- ③ ゲート


N-4

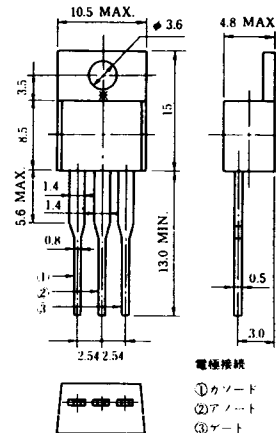


電極接続

- ① カソード
- ② アノード
- ③ ゲート

N-5

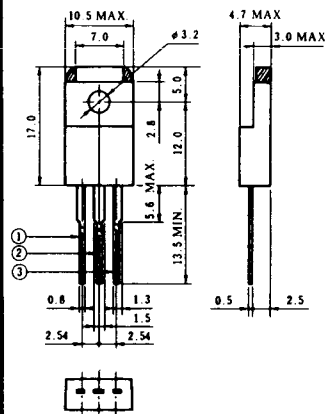


N-6

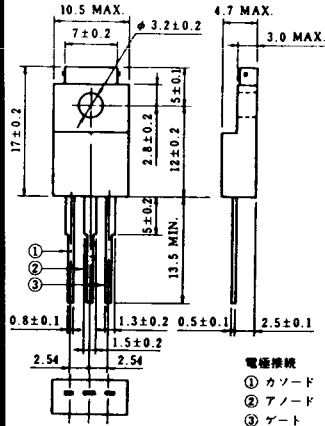


電極接続

- ① カソード
- ② アノード
- ③ ゲート

N-7

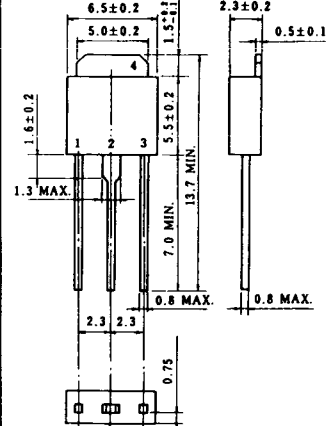


N-8

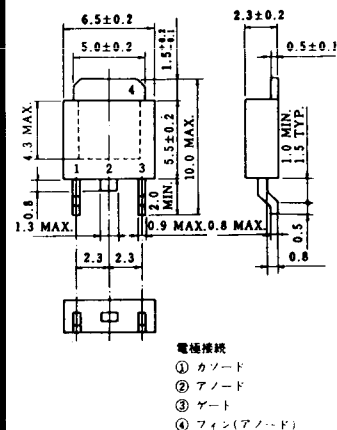

電極接続

- ① カソード
- ② アノード
- ③ ゲート
- ④ フィン(アノード)

N-9




電極接続

K : カソード

A : アノード

G : ゲート

NA-1

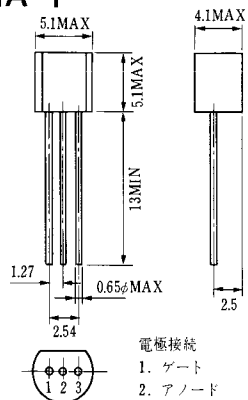


電極接続

1. ゲート
2. アノード
3. カソード

JEDEC: TO-92

NA-2

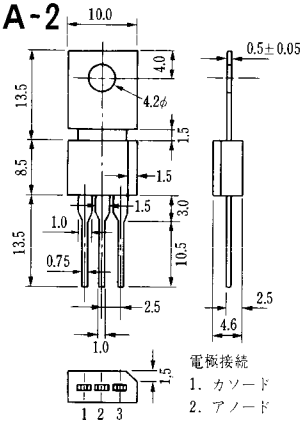


電極接続

1. カソード
2. アノード
3. ゲート


JEDEC: TO-202AA

NI-1

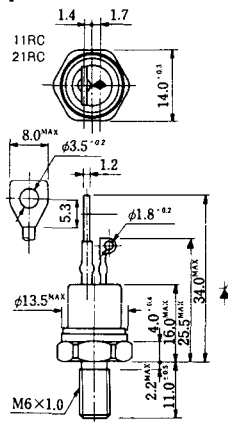


NI-2

29RD




NI-3

39RC
59RC
39RF
59RF

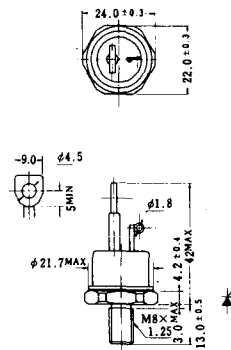


NI-4

68RP, 88RP, 108RP, 68RS,
88RS, 78RT, 88RLD, 88RLE,
88RLF, 88RLG, 88RLH, 108RLE




NI-5

158RP, 208RP, 128RS, 178RS,
158RT, 178RLD, 178RLE,
178RLF, 178RLG, 178RLH,
208RLE




NI-6

308RP, 408RP, 508RP, 278RS,
358RS, 258RT, 258RLD, 258RLG,
258RLH, 308RLE, 308RLF,
358RLE




NI-7

89RW $\frac{1}{2}$ L
129RW $\frac{1}{2}$ L

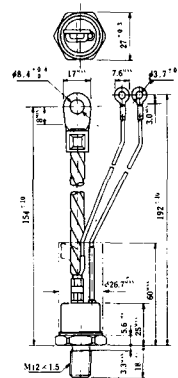


NI-8

89RW
129RW

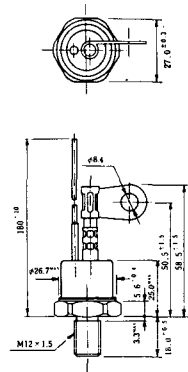


NI-16

503PLF
503PLH




NI-17

3003PA




NI-18

353PGA「E




NI-19

603PGA, 603PGA「A, 803PGA




NI-20

603PGA「E




NI-21

1001PGB「E




NI-22

1201PGA, 1201PGA「A, 1401PGA




NI-23

1201PGA「E



NI-24


2001PGB^r J E



NI-25


NI-26

NT-1




電線接続
① T₁
② ゲート
③ T₂

NT-2




電線接続
① T₁
② ゲート
③ T₂

NT-3

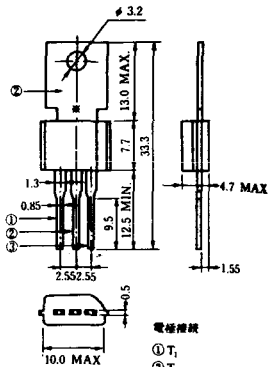


電線接続
① T₁
② T₂
③ ゲート

NT-4

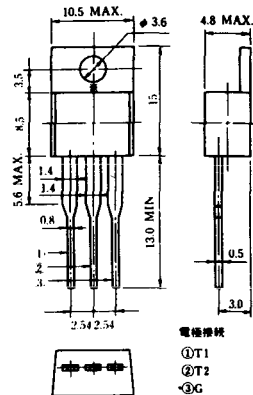


電線接続
① T₁
② T₂
③ G

NT-5

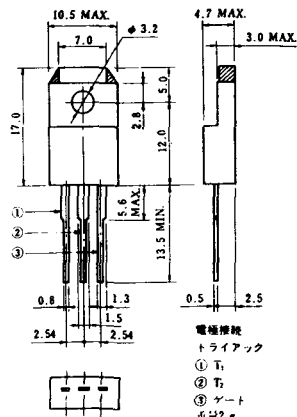


電線接続
トリアック
① T₁
② T₂
③ ゲート
④ 2K

NT-6

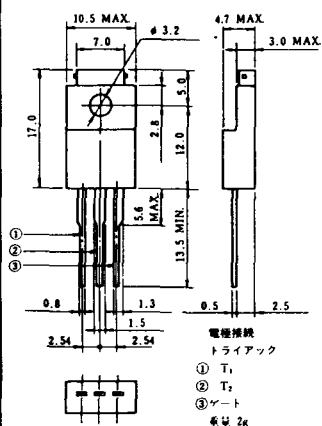


電線接続
トリアック
① T₁
② T₂
③ ゲート
④ 2K

NT-7

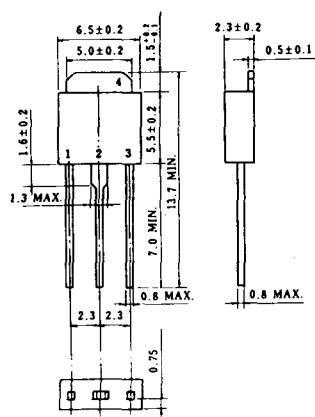


NT-8

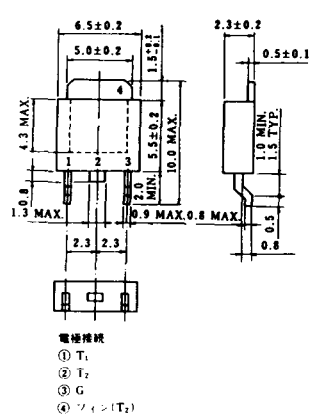


電線接続
① T₁
② T₂
③ G
④ T₁ (T₂)


SA-1

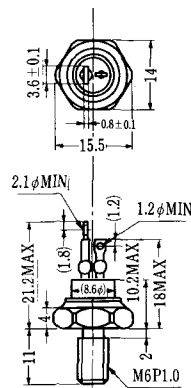


SA-2

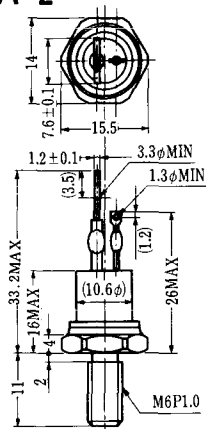


SA-3

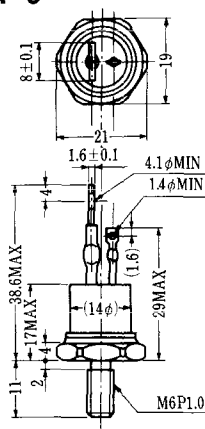


SA-4

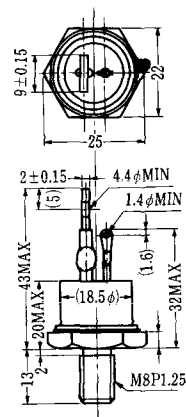


SA-5

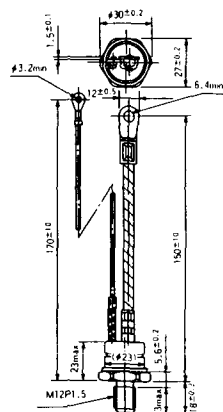


SA-6

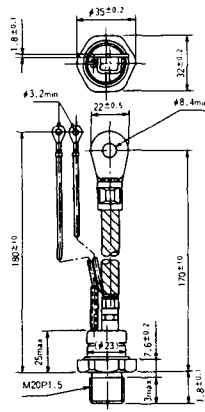


SA-7

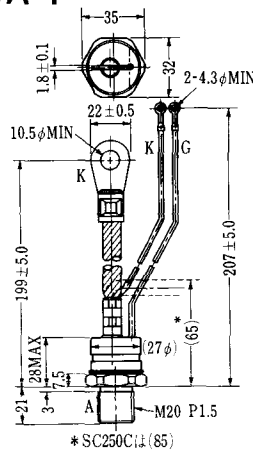


SA-8

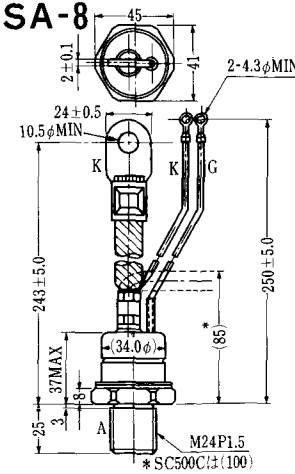


SA-9

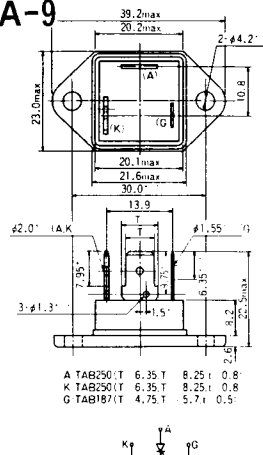


SA-10

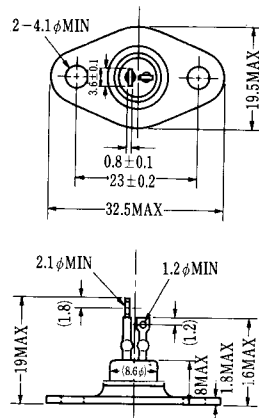


SA-11

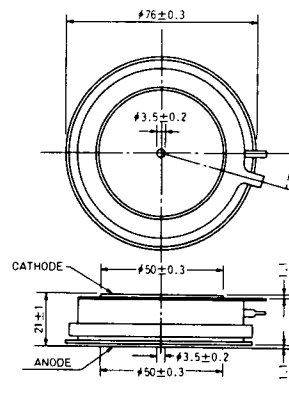

SA-12

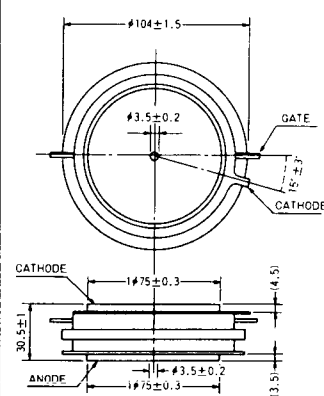


SAT-1

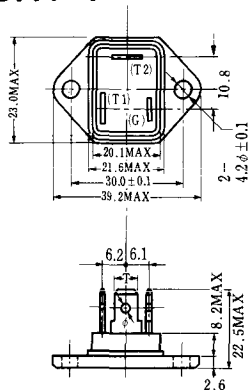


T1端子:ファストン250($T=6.35$, $t=0.8$, $\phi=1.65$)
T2端子:ファストン250($T=6.35$, $t=0.8$, $\phi=1.65$)
G端子:ファストン187($T=4.75$, $t=0.5$, $\phi=1.3$)


SAT-2

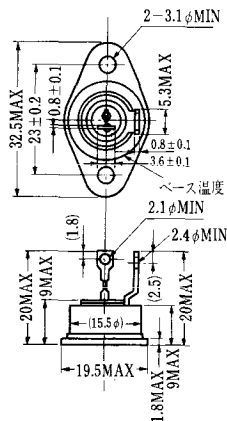


SAT-3

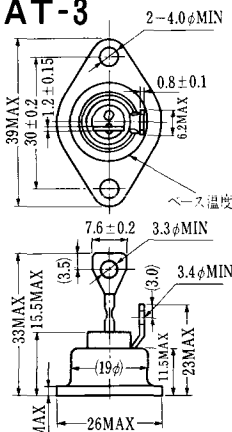


SAT-4

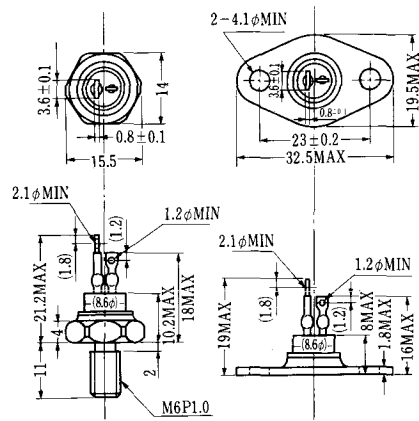


SAT-5

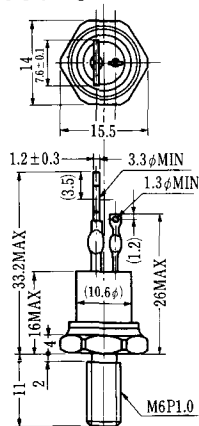


SAT-6

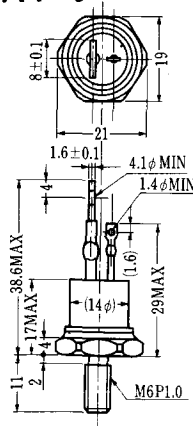


SAT-7

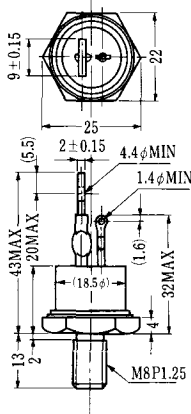


SAT-8

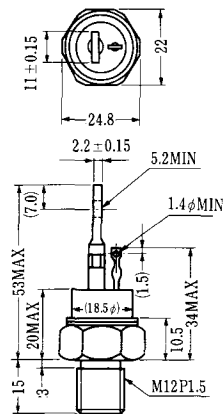


SAT-9.

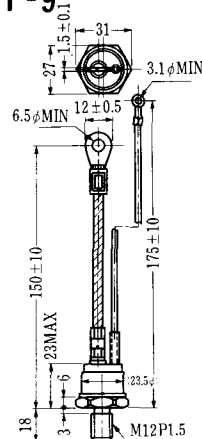


SAT-10

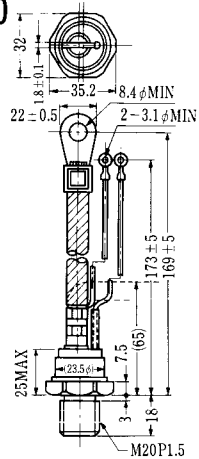


SAT-11

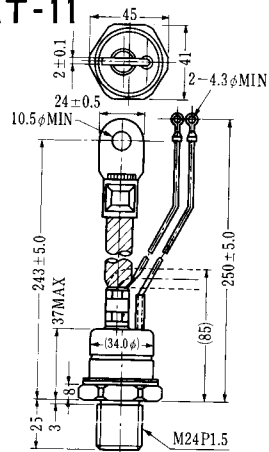


SY-1(1096A)




SY-2(1151)

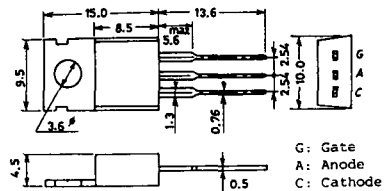


SY-3(1104)



SY-4(1150)

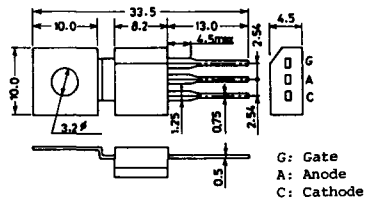


1097A




G: Gate


1102




1141




1142




1144

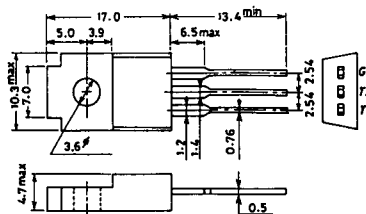

1155

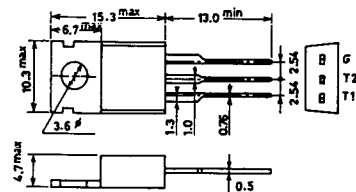


1192A




G: Gate


T-1 (13-5A1A)

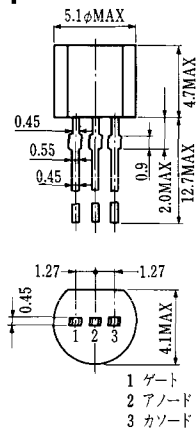


T-2 (13-8A1A)

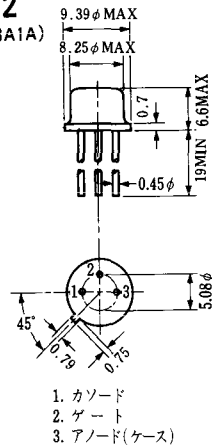


T-3 (13-8C1A)

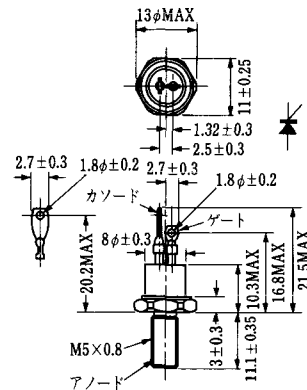


T-4 (13-10A1A)

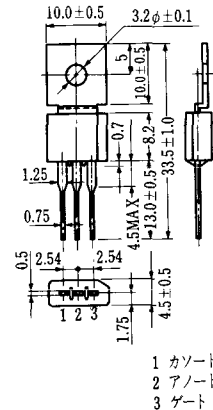


T-5 (13-10B1A)

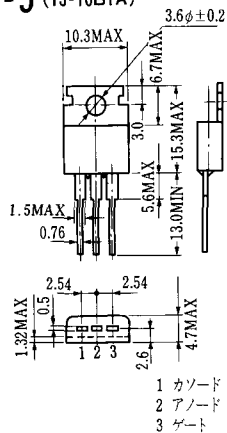


T-6 (13-11D1A)

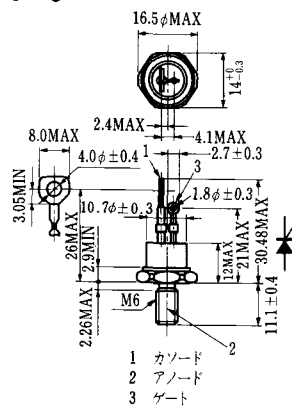


T-7 (13-13A1A)

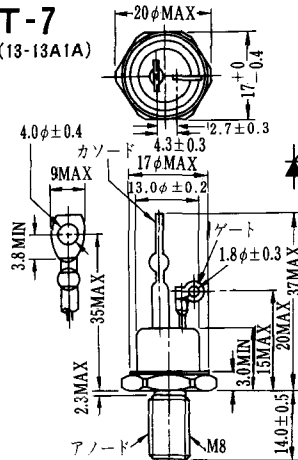


T-8 (13-13B1A)

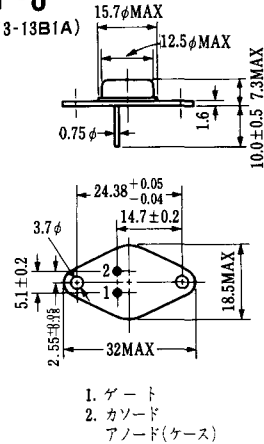


T-17 (13-42A1A)

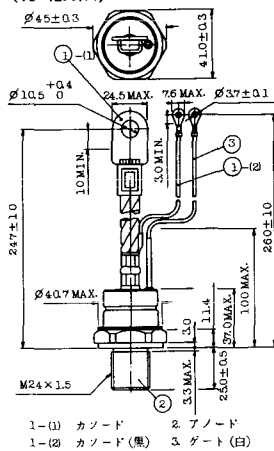


T-18 (13-45D1A)

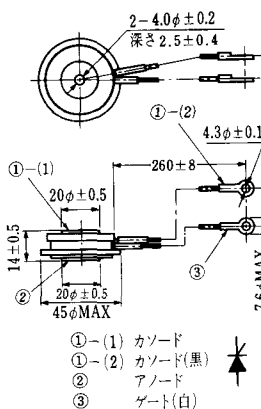


T-19 (13-52B1A)

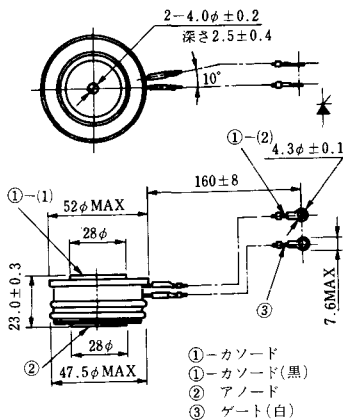


T-20 (13-52C1A)

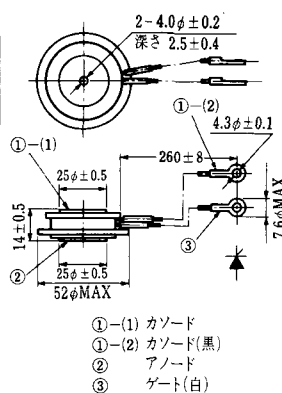


T-21 (13-60A1A)

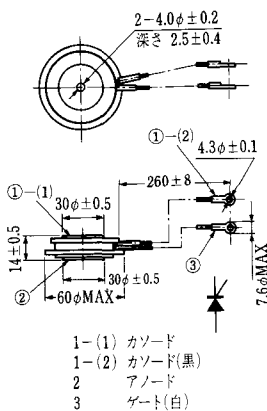


T-22 (13-70C1A)

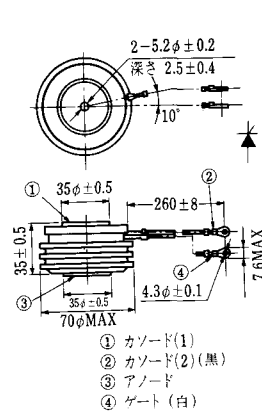


T-23 (13-78A1A)

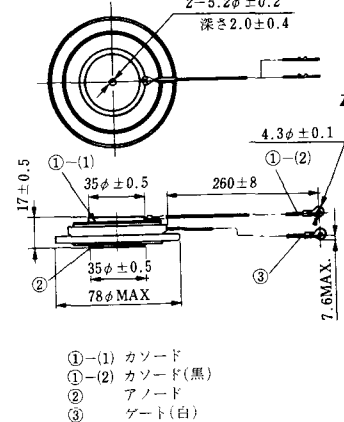


T-24 (13-100C1A)

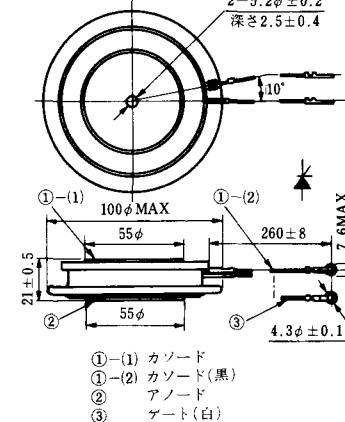


T-25 (13-120A2A)

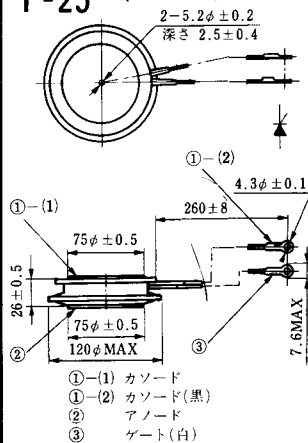


T-26 (13-150A1A)

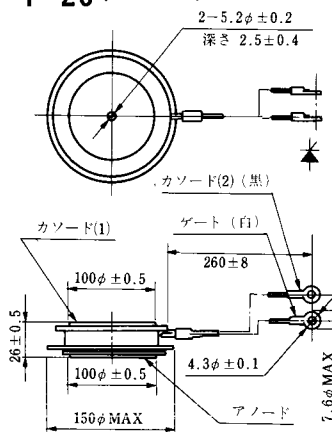


T-27 (13-37A1A)

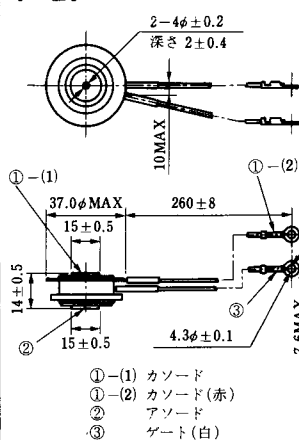


T-28 (13-45E1A)

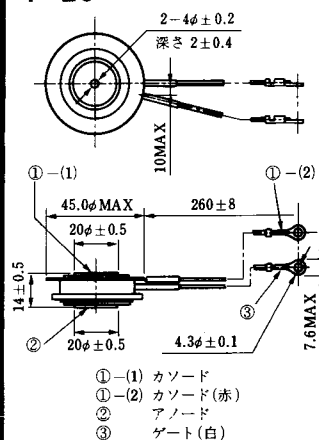


T-29 (13-51A1A)

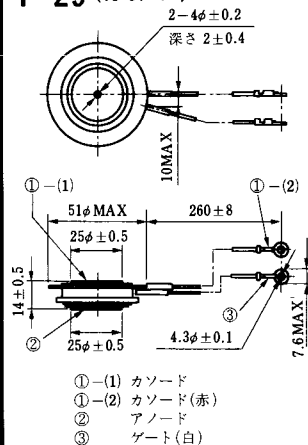


T-30 (13-57A1A)

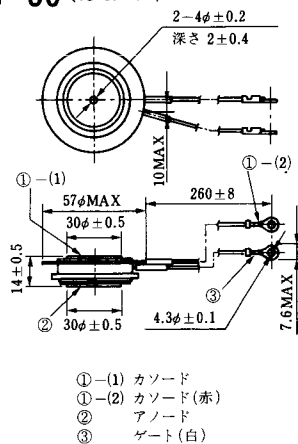


T-31 (13-100E1A)

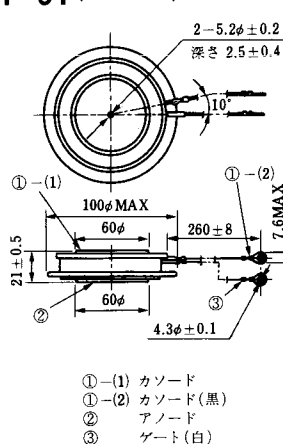


T-32 (13-60E3A)

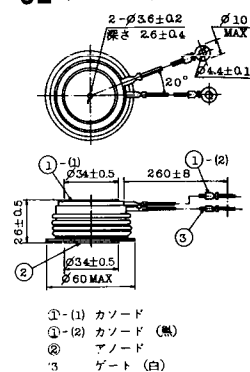


T-41 (13-28A2A)

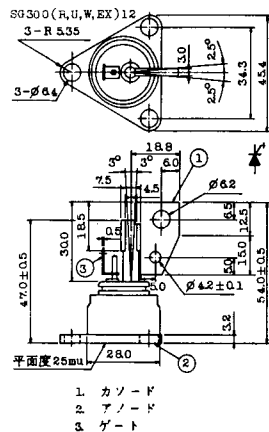


T-42 (13-45F1A)

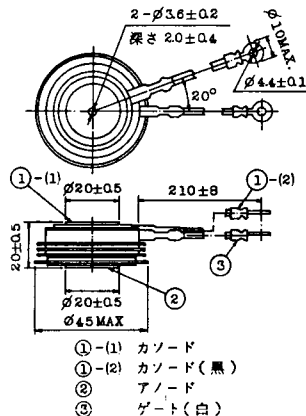


T-43 (13-60E2A)

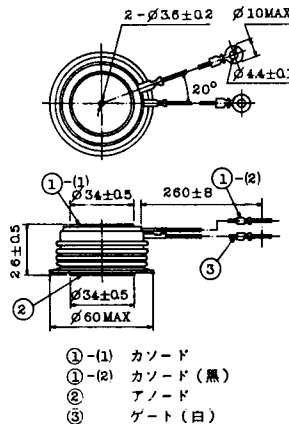


T-44 (13-36A1A)

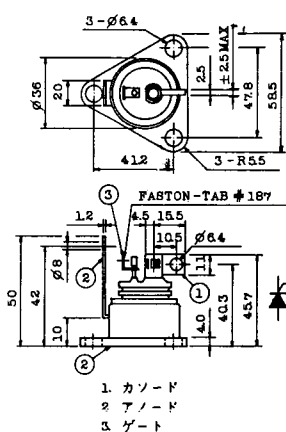


T-45 (13-51B1A)

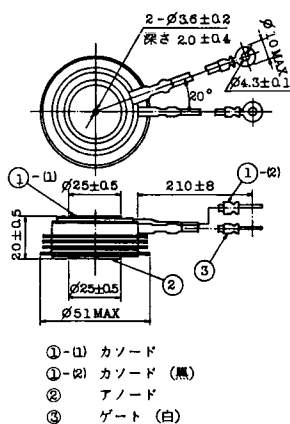


T-46 (13-36B1A)

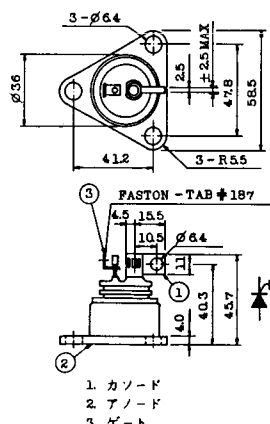


T-47 (13-60E1A)

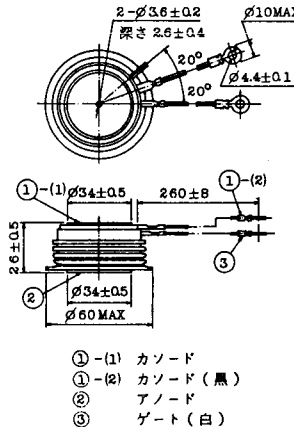

T-48 (13-93C1A)

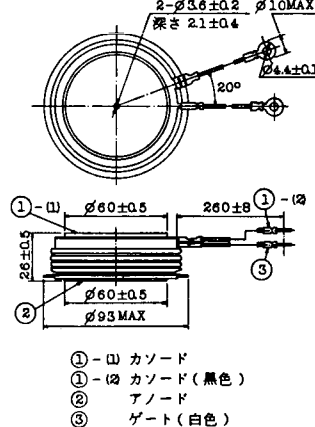


T-49 (13-75A1A)




- 1-(1) カソード
1-(2) カソード (黒)
2 アノード
3 ゲート (白)

T-50 (13-10A3A)




- 1 カソード
2 アノード
3 ゲート

T-51 (13-10D1A)




- 1 カソード
2 アノード
3 ゲート

T-52 (13-10D2A)




- 1 カソード
2 アノード
3 ゲート

T-53 (13-10E1B)




- 1 カソード
2 アノード
3 ゲート

T-54 (13-10F1B)




- 1 カソード
2 アノード
3 ゲート

T-55 (13-5A1D)




- 1 カソード
2 ゲート
3 アノード

T-56 (13-13C1A)




- 1 カソード
2 アノード
3 ゲート


T-57 (12-16C1A)

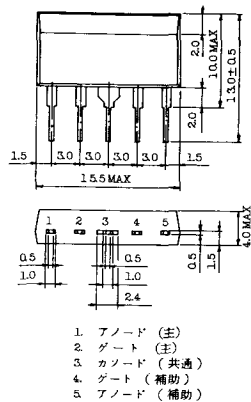


T-58 (13-10H1B)

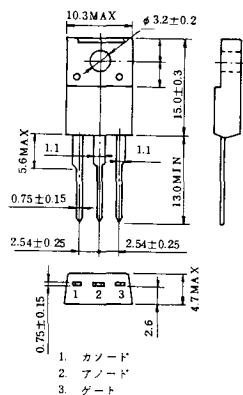


T-59 (13-120A1A)

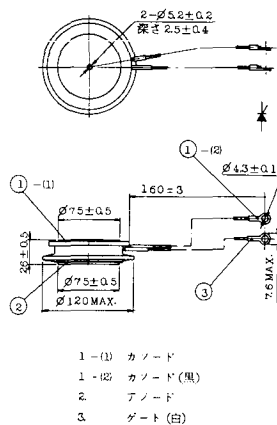


T-60

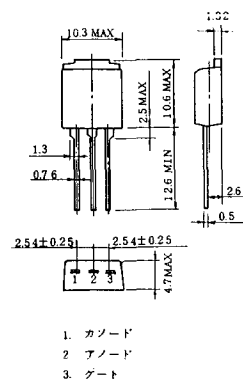


T-61 (13-5B1A)

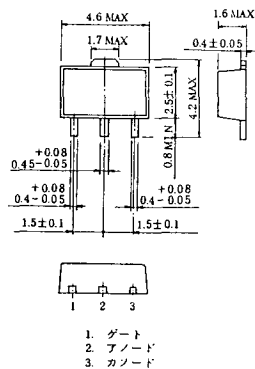


T-62 (13-10H1A)

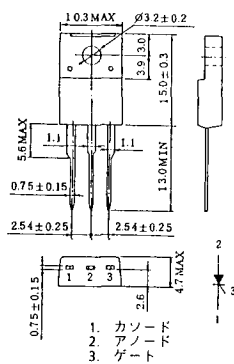


T-63 (13-16A1B)

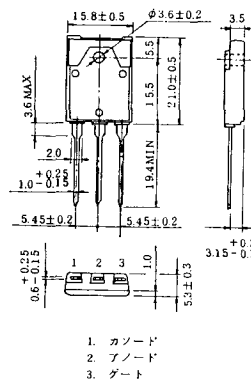


TT-1

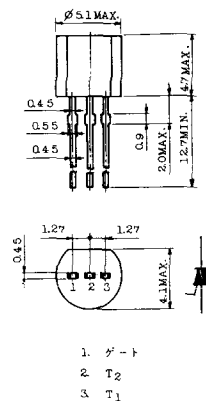


TT-2

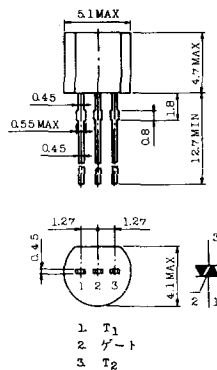


TT-3

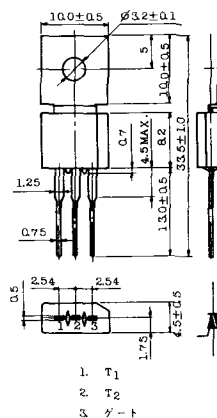


TT-4

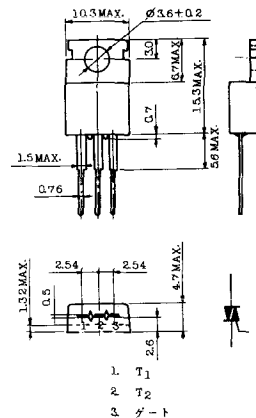


TT-5

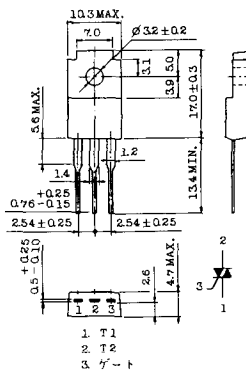


TT-6

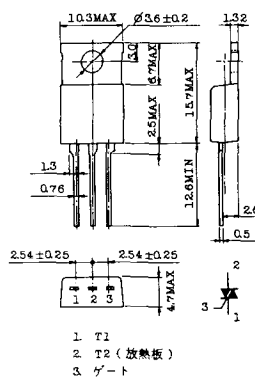


TT-7

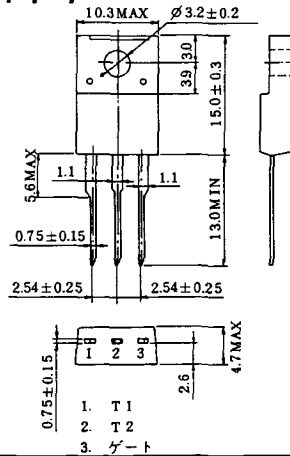


TT-8

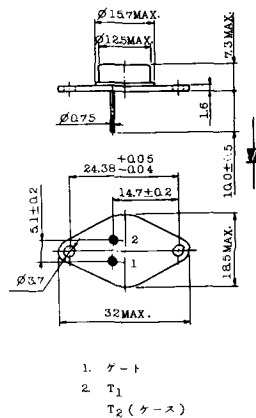


TS-1

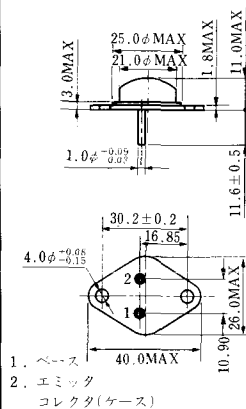


TS-2

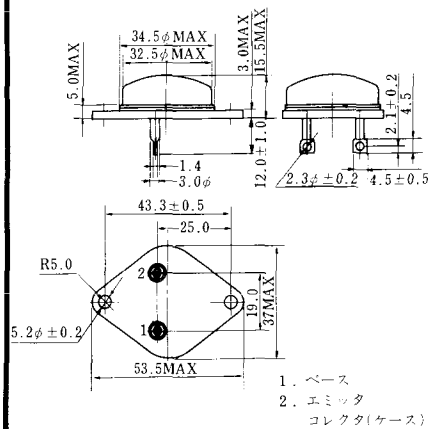


TS-3

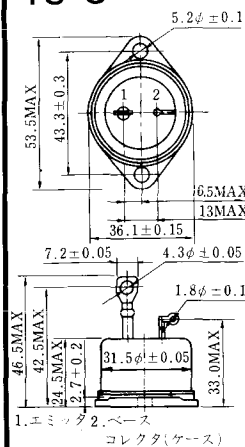


TS-4

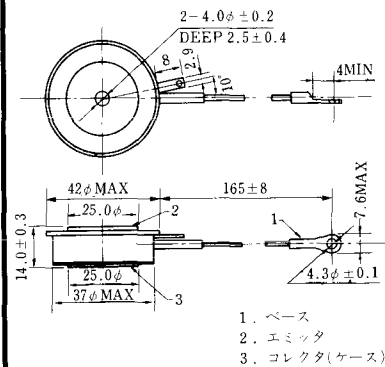


TS-5

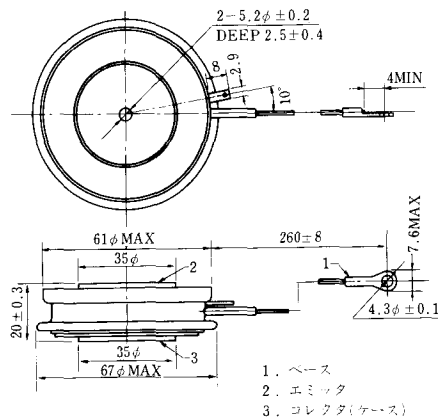


TS-6

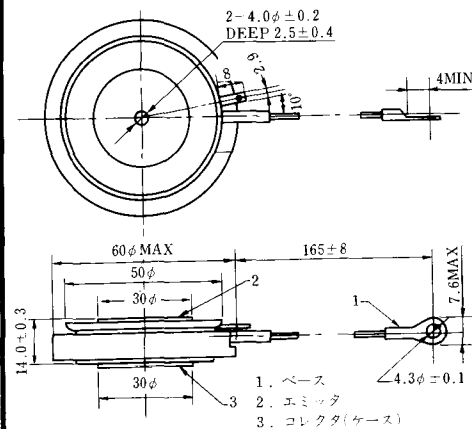


TS-7

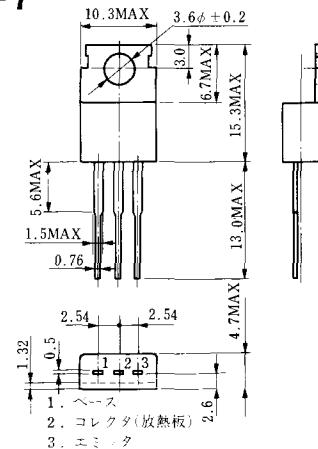


S-62A1A




S-80A1A

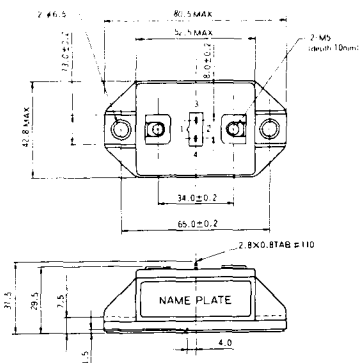


S-88D1A




S-92B1A




S-94B1A

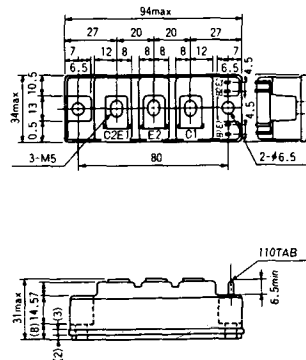


S-94B1B




S-94B2A

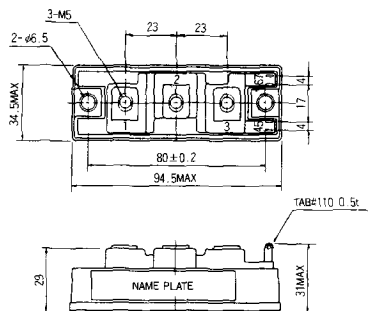


S-94D1A

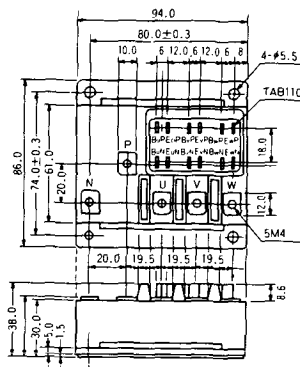


S-95A1A




S-95B1A

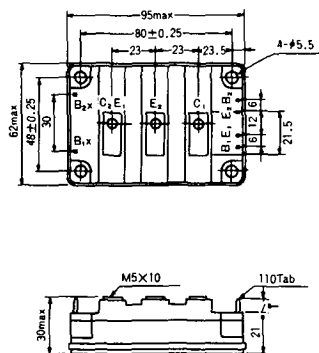


S-98B1B

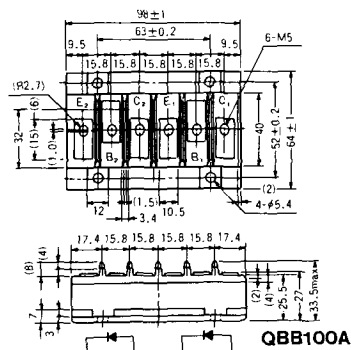


S-108A2A




S-108B1A

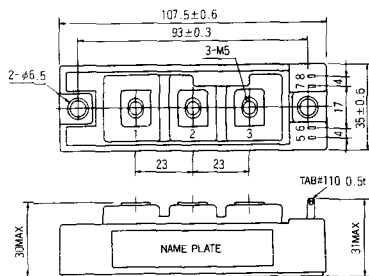


S-108B1B




S-108B1C

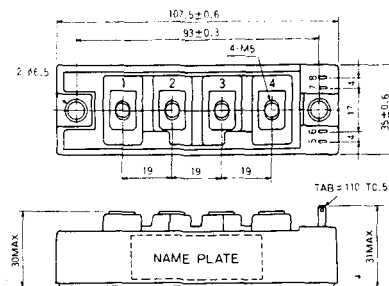


S-108B2A

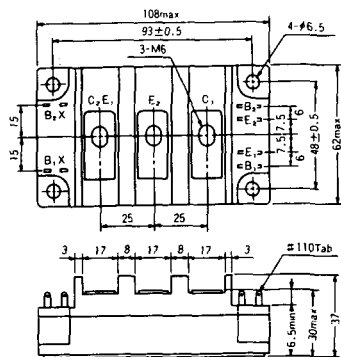


S-108B2B

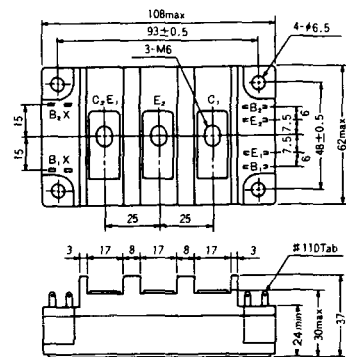


2-22B1A

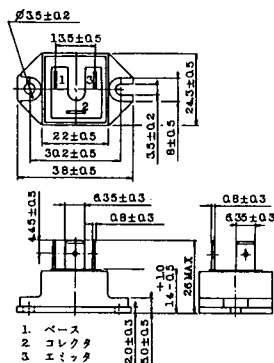


2-27A4A




2-33C1A

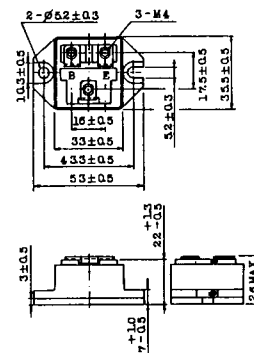


2-33D1A




2-33F1A

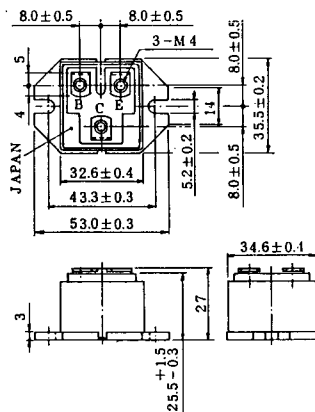


2-37A1A

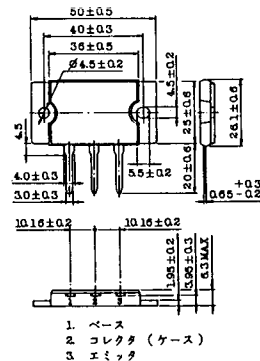


2-48A3A




2-48A3B




2-48A4A




2-64A2A






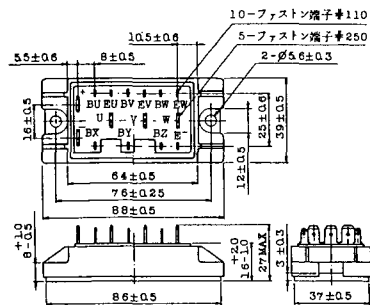


2-64A2B

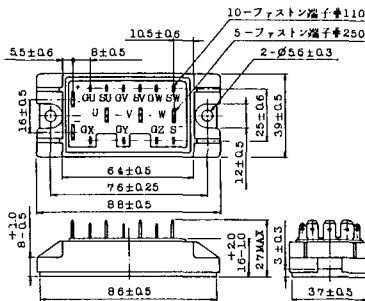


2-68A2A

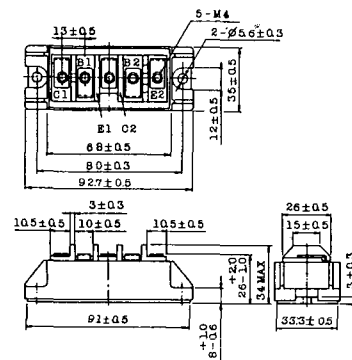


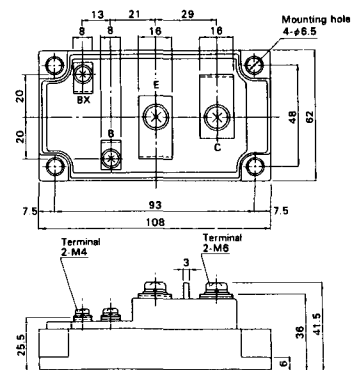


M-107

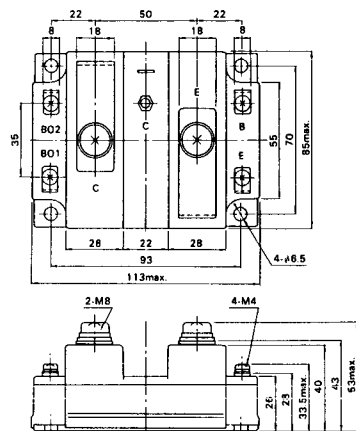


M-116




M-201




M-202

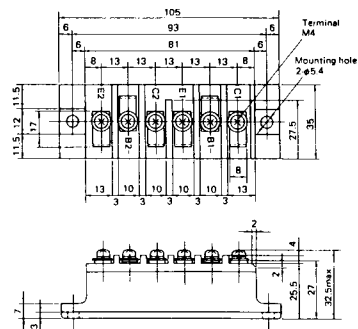


M-203

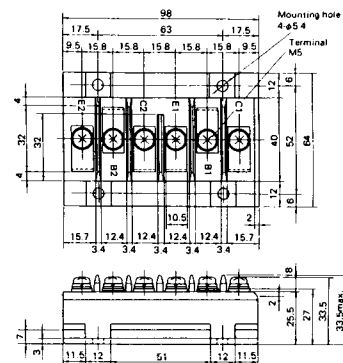


M-204

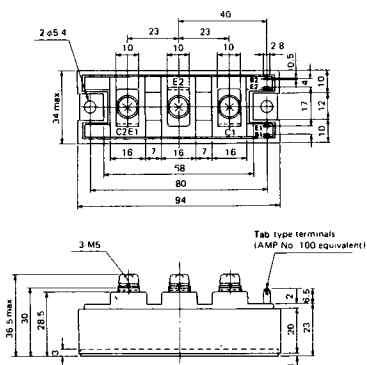


M-205

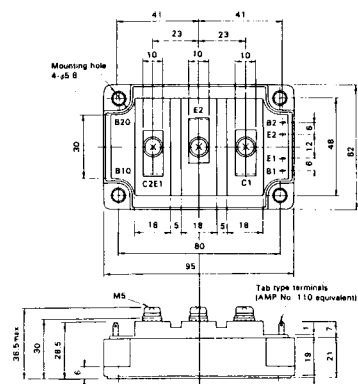


M-206

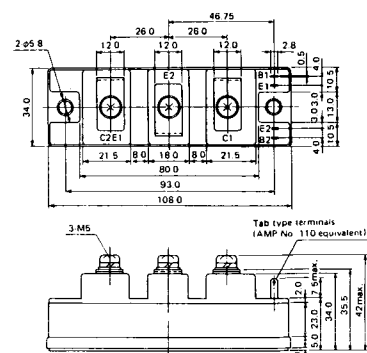


M-207

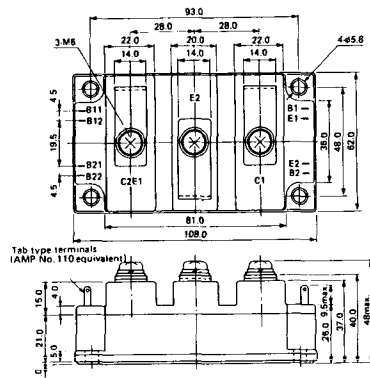


M-208

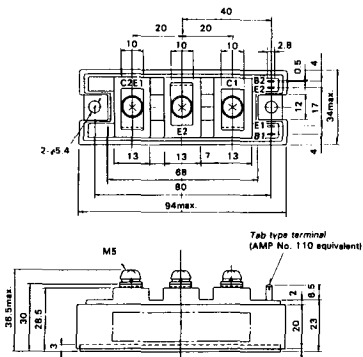


M-209

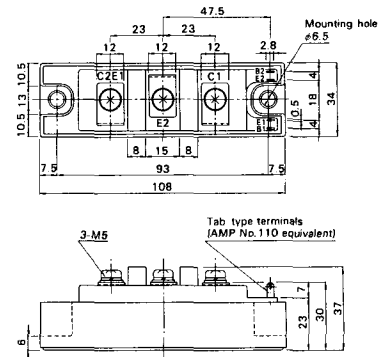


M-210

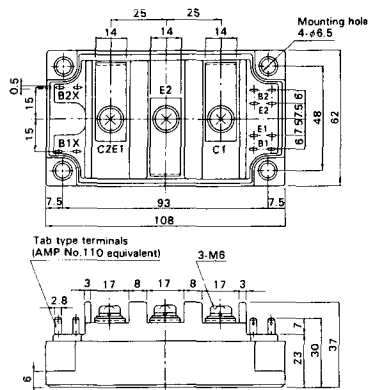


M-211



M-212




M-213




M-214


M-215




M-216




M-217




M-218




M-601

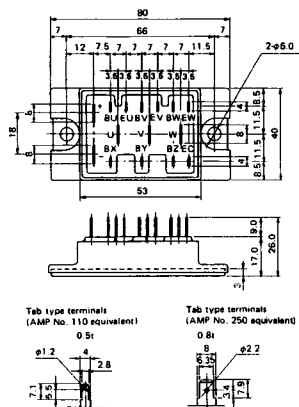


M-602

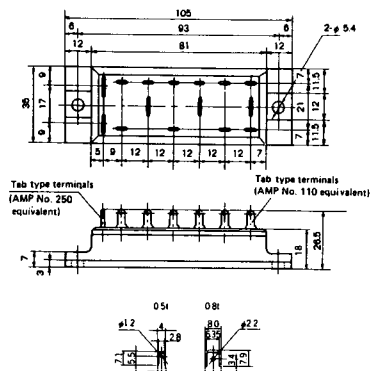


M-603

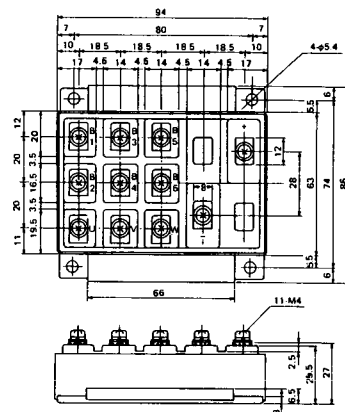


M-604




M-605

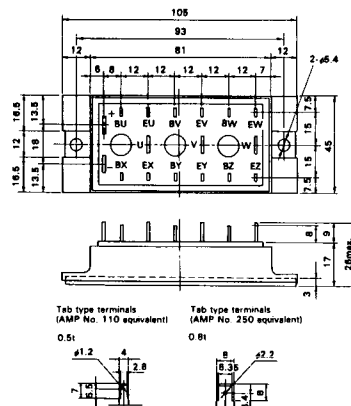


M-606




M-1A1A




M-2A1A




M-2B1A




M-2B2A




M-2C2A




M-2D4A

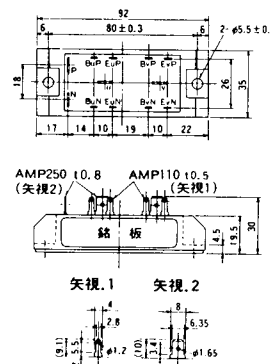


M-2E6A

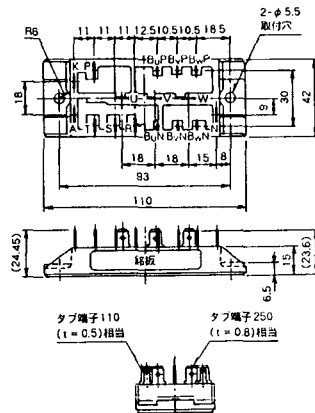


M-2F6A




M-2G6A

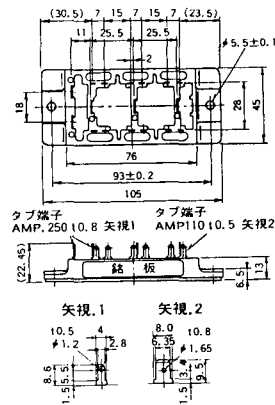


M-3A1A




M-3B1A




M-3B1B

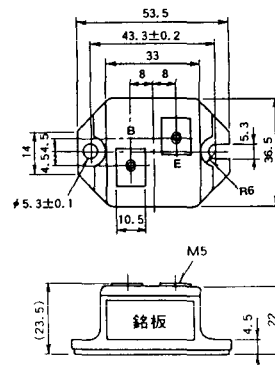


M-3C1A

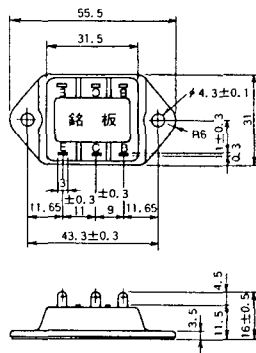


M-3D6A

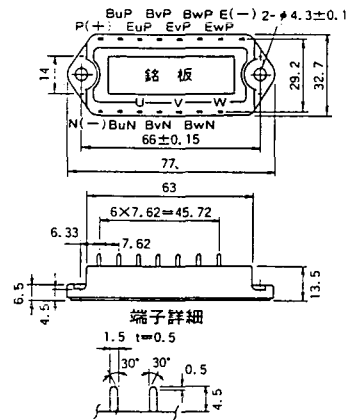


M-3E6A

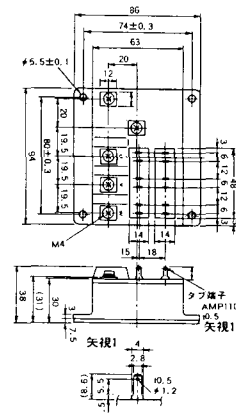


M-4A1A




M-4A2A




M-4A1B




M-5C2A




M-5D2A




M-6A1A

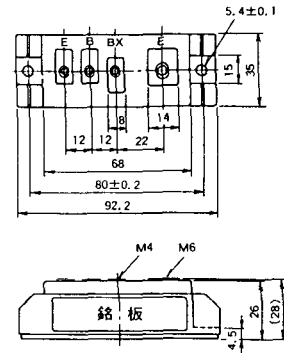


M-7A1A

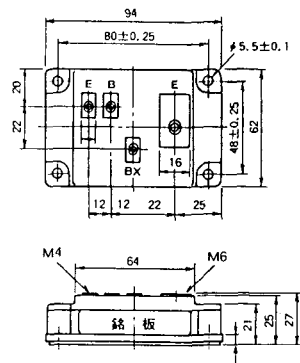


M-7B1A




M-8A1A




M-8A1B




M-8A2A




M-8A2B




M-8B2A

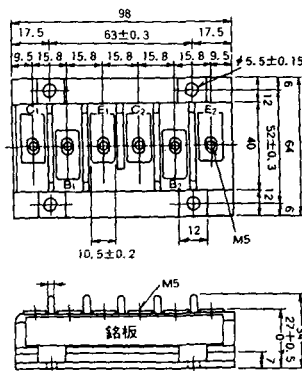


M-9A1A




M-9A2A




M-9B1A




M-9C2A




M-1A1B

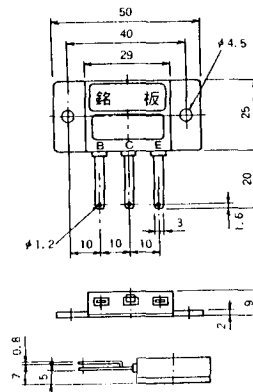


M-1A1C




M-2E6B

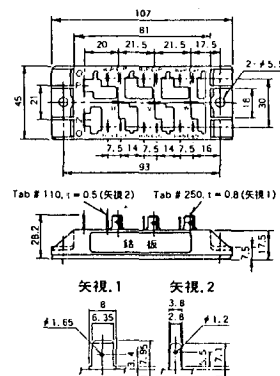


M-2E6C




M-10A2A




M-10A2B




M-11A2A

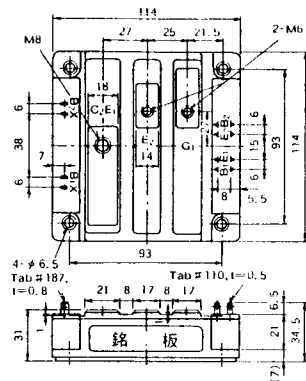


M-12A6A

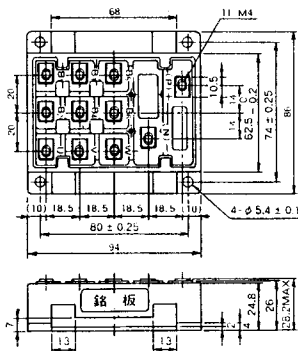


M-12B6A




M-12B6B

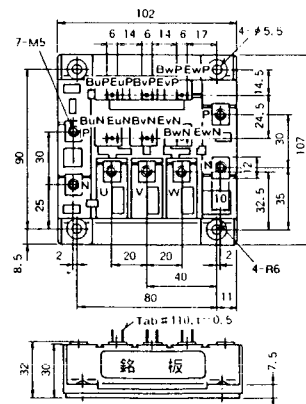


M-4A2D

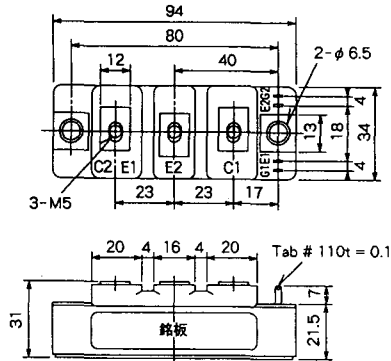


M-4A2E

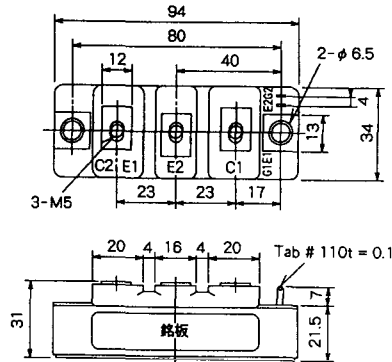


M-4C2A

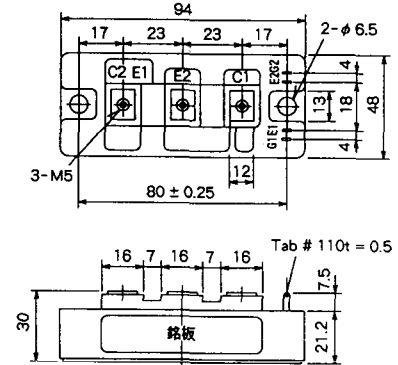


M-4C2B

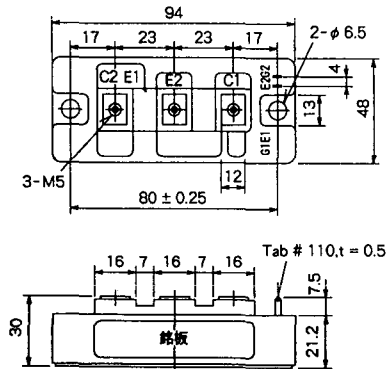


M-9B1C

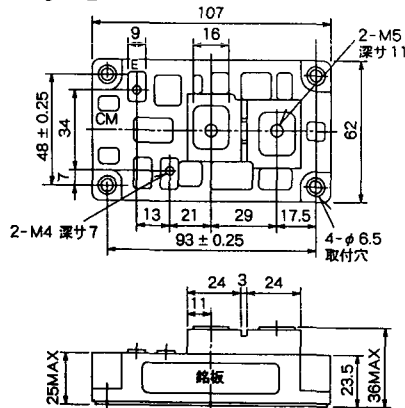


M-9D2A

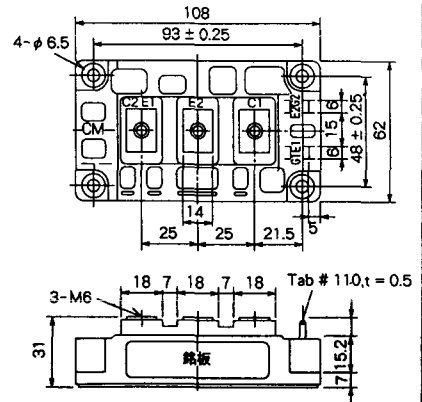




M-9D2B

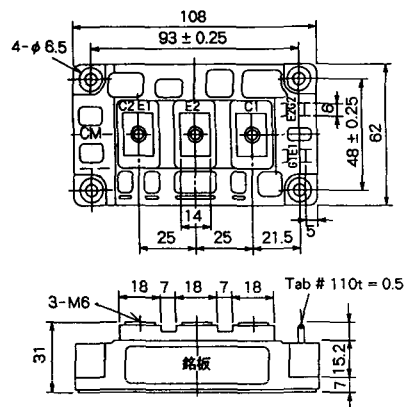

M-10A2C

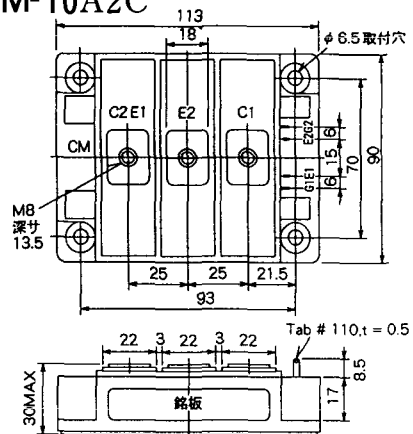



H-101

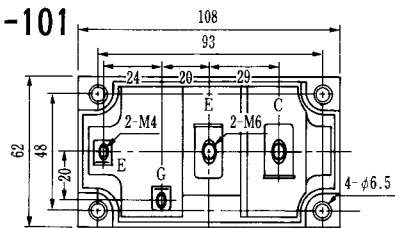



Weight :480g

TERMINALS


LF-J

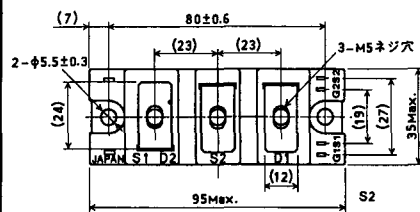


LF-K

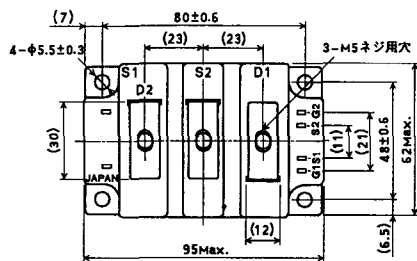


U-1

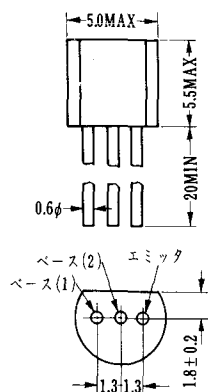


U-2

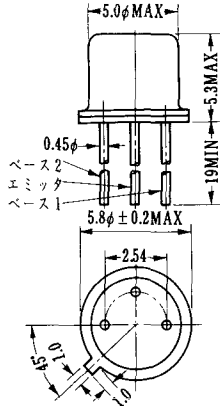

U-3

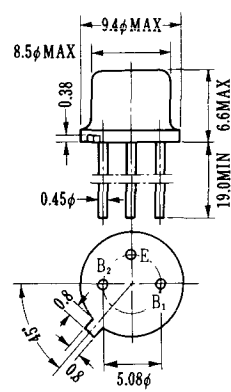


U-4

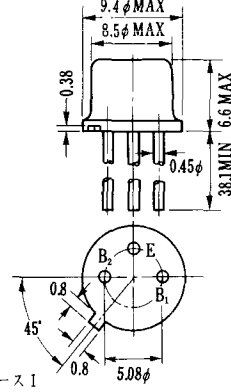

電極接続


B₁: ベース1
B₂: ベース2
E: エミッタ

U-5

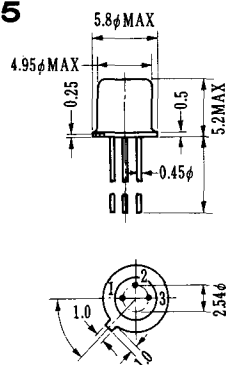


1. BASE1
2. EMITTER
3. BASE2 (CASE)

U-6

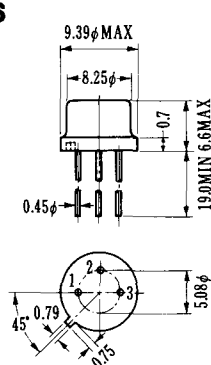

1. BASE(2)
2. EMITTER
3. BASE(1)

U-7

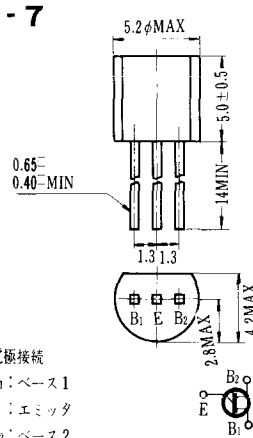

電極接続

B₁: ベース1
E: エミッタ
B₂: ベース2

U-8

