

## IGBT IPM R-series 1200V class

1200V / 50A 6 in one-package

### ■ Features

- Temperature protection provided by directly detecting the junction temperature of the IGBTs.
- Low power loss and soft switching.
- High performance and high reliability IGBT with overheating protection.
- Both P-side and N-side alarm output available.
- Higher reliability because of a big decrease in number of parts in built-in control circuit.

### ■ Maximum ratings and characteristics

#### ● Absolute maximum ratings(at Tc=25°C unless otherwise specified)

Item	Symbol	Rating		Unit
		Min.	Max.	
Bus voltage	DC	VDC	0	900
	Surge	VDC(surge)	0	1000
	Short operating	Vsc	200	800
Collector-Emitter voltage *1	Vces	0	1200	V
Inverter	Collector current DC	Ic	-	50
	1ms	Icp	-	100
	Duty=98.0% *2	-Ic	-	50
	Collector power dissipation	Pc	-	357
Supply voltage of Pre-Driver *4	Vcc	-0.5	20	V
Input signal voltage *5	Vin	-0.5	Vcc+0.5	V
Input signal current	In	-	3	mA
Alarm signal voltage *6	VALM	-0.5	Vcc	V
Alarm signal current *7	IALM	-	20	mA
Junction temperature	Tj	-	150	°C
Operating case temperature	Topr	-20	100	°C
Storage temperature	Tstg	-40	125	°C
Isolating voltage (Terminal to base, 50/60Hz sine wave 1min.)	Viso	-	AC2500	V
Screw torque	Terminal (M5)		-	3.5 N·m
	Mounting (M5)		-	3.5 N·m

#### Note

\*1 : Vces shall be applied to the input voltage between terminal P and U or ,u or W, N and U or V or W

\*2 : 125°C/FWD Rth(j-c)/(Ic x VF MAX)=125/0.85/(50 x 3.0) x 100=98.0%

\*3 : Pc=125°C/IGBT Rth(j-c)=125/0.35=357W [Inverter]

\*4 : VCC shall be applied to the input voltage between terminal No.4 and 1, 8 and 5, 12 and 9, 14 and 13

\*5 : Vin shall be applied to the input voltage between terminal No.3 and 1, 7 and 5, 11 and 9, 16,17,18 and 13.

\*6 : VALM shall be applied to the voltage between terminal No.2 and 1, No6 and 5, No10 and 9, No.19 and 13.

\*7 : IALM shall be applied to the input current to terminal No.2,6,10 and 19.

**Electrical characteristics** (at  $T_c=T_j=25^\circ\text{C}$ ,  $V_{cc}=15\text{V}$  unless otherwise specified.)

● Main circuit

Item	Symbol	Condition		Min.	Typ.	Max.	Unit
Inverter	ICES	$V_{ce}=1200\text{V}$	$V_{in}$ terminal open.	-	-	1.0	mA
	$V_{ce(\text{sat})}$	$I_c=50\text{A}$	Terminal	-	-	2.6	V
			Chip	-	1.9	-	
Forward voltage of FWD	$V_F$	$-I_c=50\text{A}$	Terminal	-	-	3.0	V
			Chip	-	2.3	-	
Turn-on time	$t_{on}$	$V_{dc}=600\text{V}, T_j=125^\circ\text{C}$		1.2	-	-	$\mu\text{s}$
Turn-off time	$t_{off}$	$I_c=50\text{A}$ Fig.1, Fig.6		-	-	3.6	
Reverse recovery time	$t_{rr}$	$V_{dc}=600\text{V}, I_F=50\text{A}$ Fig.1, Fig.6		-	-	0.3	

● Control circuit

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply current of P-line side pre-driver(one unit)	$I_{ccp}$	Switching Frequency : 0 to 15kHz $T_c=-20$ to $125^\circ\text{C}$ Fig.7	-	-	18	mA
Supply current of N-line side pre-driver	$I_{ccn}$		-	-	65	mA
Input signal threshold voltage (on/off)	$V_{in(\text{th})}$	ON	1.00	1.35	1.70	V
		OFF	1.25	1.60	1.95	V
Input zener voltage	$V_z$	$R_{in}=20\text{k ohm}$	-	8.0	-	V
Alarm signal hold time	$t_{ALM}$	$T_c=-20^\circ\text{C}$ Fig.2	1.1	-	-	ms
		$T_c=25^\circ\text{C}$ Fig.2	-	2.0	-	ms
		$T_c=125^\circ\text{C}$ Fig.2	-	-	4.0	ms
Limiting Resistor for Alarm	$R_{ALM}$		1425	1500	1575	ohm

● Protection Section (  $V_{cc}=15\text{V}$  )

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Over Current Protection Level of Inverter circuit	$I_{oc}$	$T_j=125^\circ\text{C}$	75	-	-	A
Over Current Protection Delay time	$t_{doc}$	$T_j=125^\circ\text{C}$	-	10	-	$\mu\text{s}$
SC Protection Delay time	$t_{sc}$	$T_j=125^\circ\text{C}$ Fig.4	-	-	12	$\mu\text{s}$
IGBT Chip Over Heating Protection Temperature Level	$T_{jOH}$	Surface of IGBT chips	150		-	$^\circ\text{C}$
Over Heating Protection Hysteresis	$T_{jH}$		-	20	-	$^\circ\text{C}$
Over Heating Protection Protection Temperature Level	$T_{COH}$	$V_{dc}=0\text{V}, I_c=0\text{A}$ CaseTemperature	110	-	125	$^\circ\text{C}$
Over Heating Protection Hysteresis	$T_{dH}$		-	20	-	$^\circ\text{C}$
Under Voltage Protection Level	$V_{UV}$		11.0	-	12.5	V
Under Voltage Protection Hysteresis	$V_H$		0.2	0.5	-	V

● Thermal characteristics(  $T_c=25^\circ\text{C}$  )

Item	Symbol	Min.	Typ.	Max.	Unit
Junction to Case thermal resistance *8	Inverter	$R_{th(j-c)}$	-	-	$^\circ\text{C}/\text{W}$
		$R_{th(j-c)}$	-	-	$^\circ\text{C}/\text{W}$
Case to fin thermal resistance with compound		$R_{th(c-f)}$	-	0.05	$^\circ\text{C}/\text{W}$

\*8 : (For 1 device, Case is under the device)

● Noise Immunity (  $V_{dc}=300\text{V}, V_{cc}=15\text{V}$ , Test Circuit Fig.5)

Item	Condition	Min.	Typ.	Max.	Unit
Common mode rectangular noise	Pulse width 1 $\mu\text{s}$ , polarity $\pm 10\text{minuets}$ Judge : no over-current, no miss operating	$\pm 2.0$	-	-	kV
Common mode lightning surge	Rise time 1.2 $\mu\text{s}$ , Fall time 50 $\mu\text{s}$ Interval 20s, 10 times Judge : no over-current, no miss operating	$\pm 5.0$	-	-	kV

● Recommendable value

Item	Symbol	Min.	Typ.	Max.	Unit
DC Bus Voltage	$V_{dc}$	-	-	800	V
Operating Supply Voltage of Pre-Driver	$V_{cc}$	13.5	15.0	16.5	V
Screw torque (M5)	-	2.5	-	3.0	Nm

● Weight

Item	Symbol	Min.	Typ.	Max.	Unit
Weight	Wt	-	450	-	g

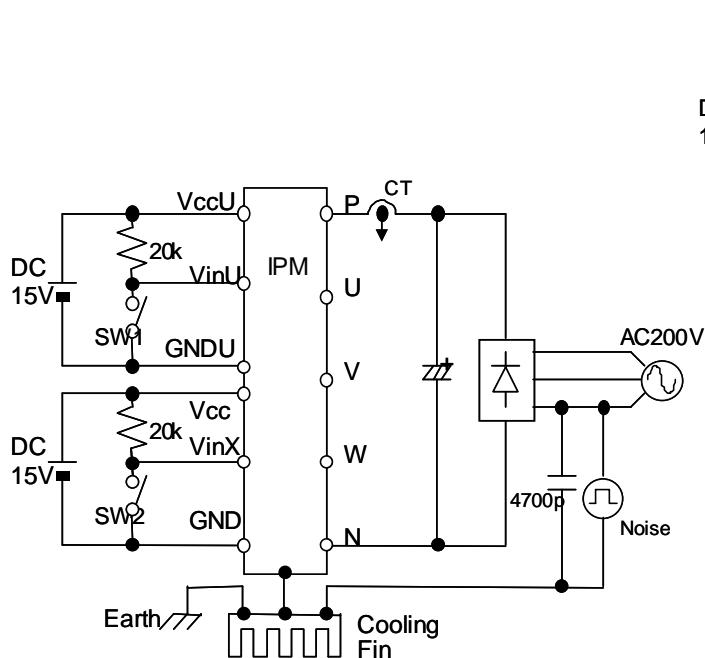
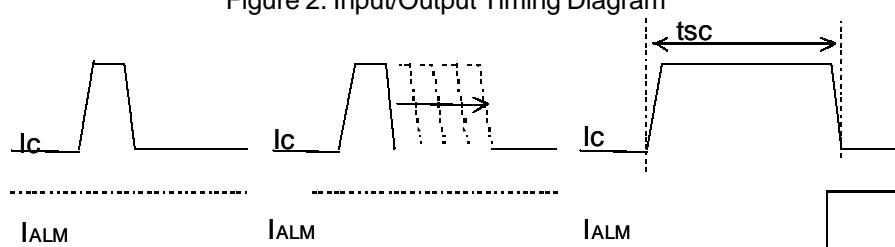
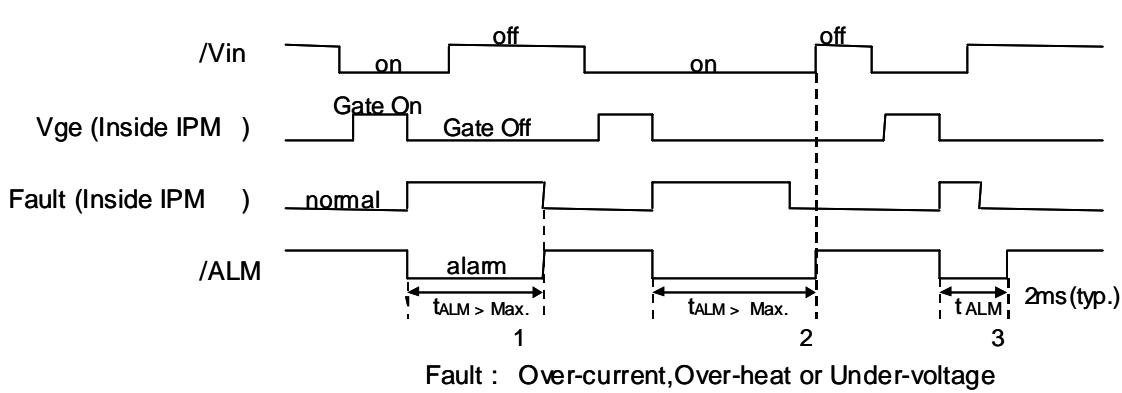
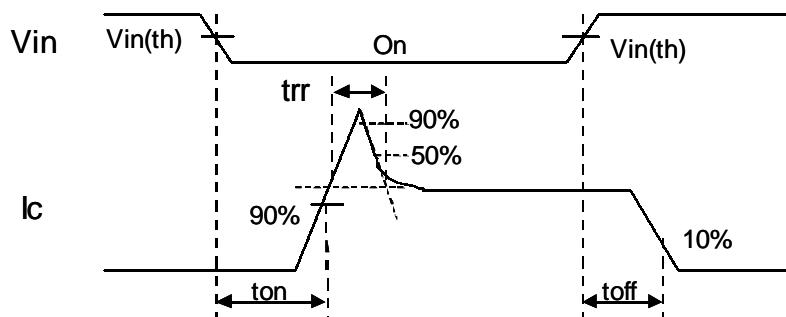


Figure 5. Noise Test Circuit

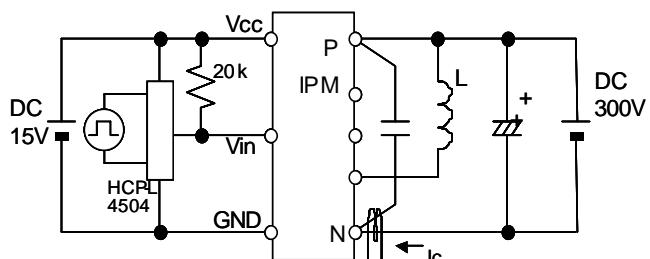


Figure 6. Switching Characteristics Test Circuit


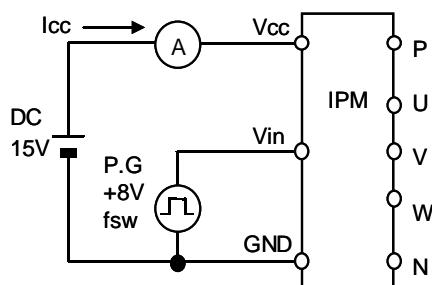


Figure 7. Icc Test Circuit


## ■ Block diagram

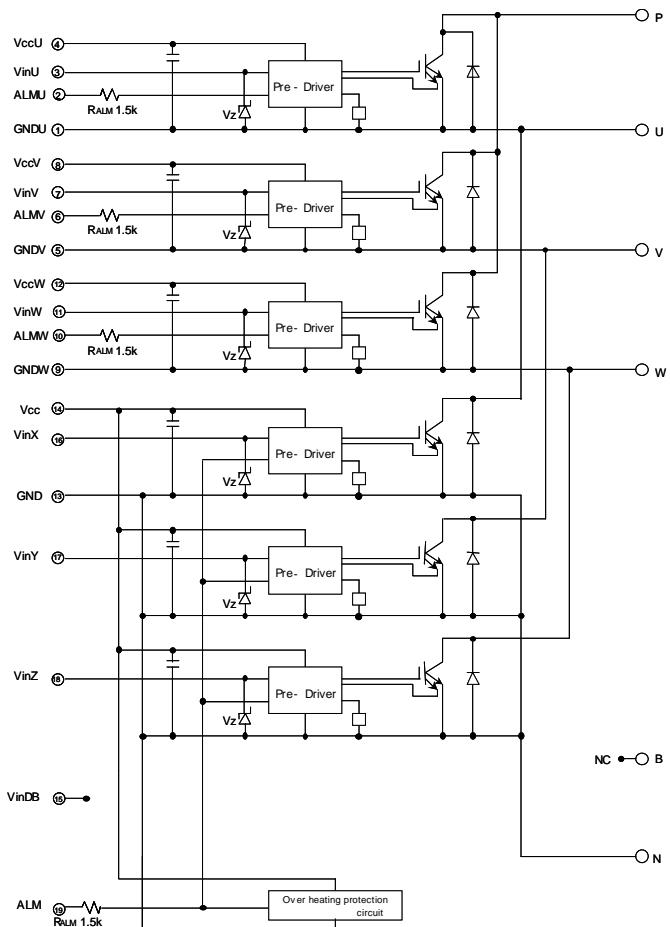

Pre-drivers include following functions

1. Amplifier for driver
2. Short circuit protection
3. Under voltage lockout circuit
4. Over current protection
5. IGBT chip over heating protection







## ■ Outline drawings, mm

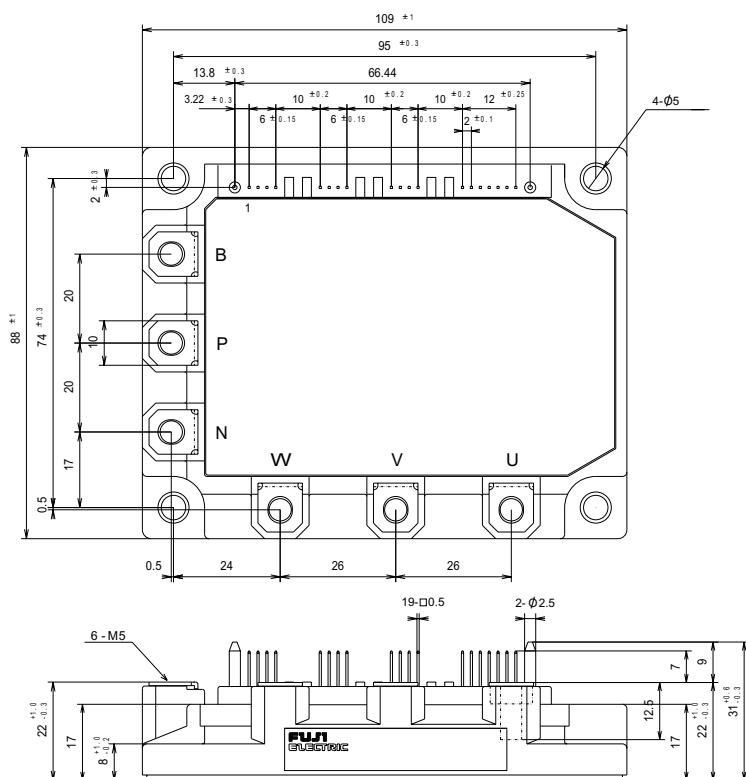

Mass : 450g

## ■ Characteristics

### ● Control circuit characteristics (Representative)

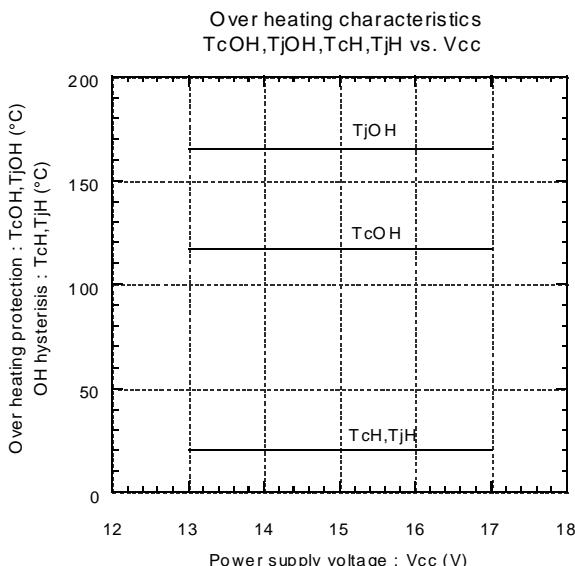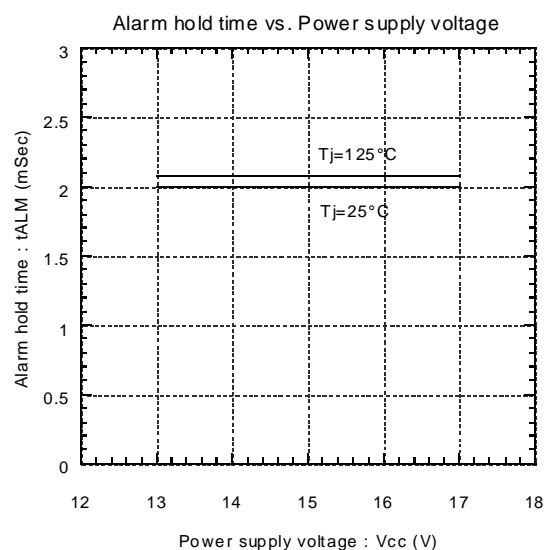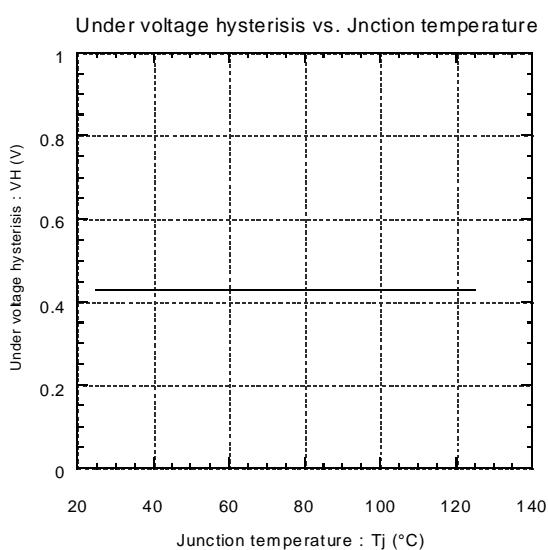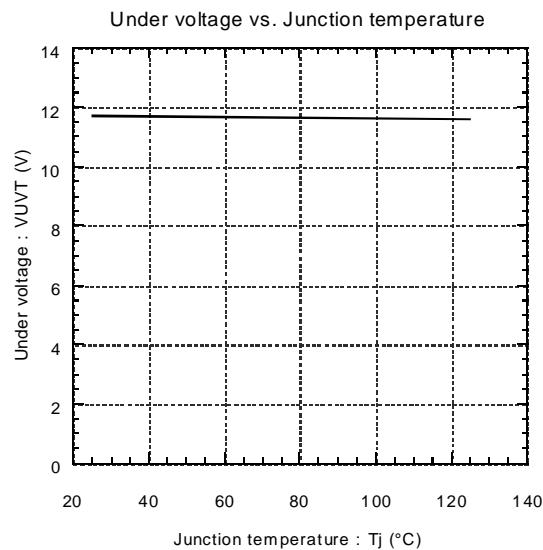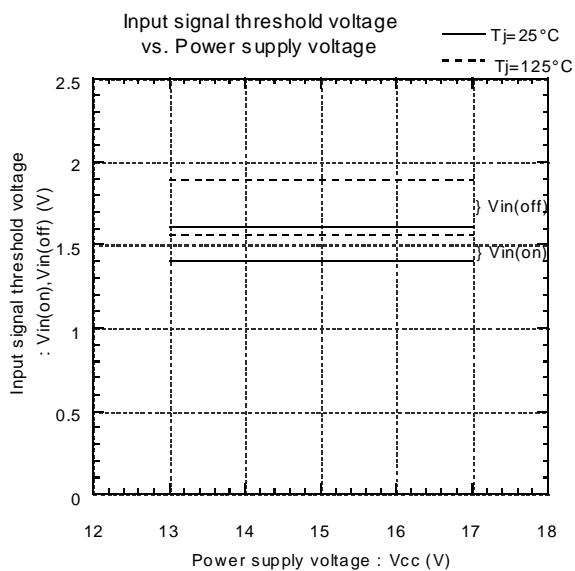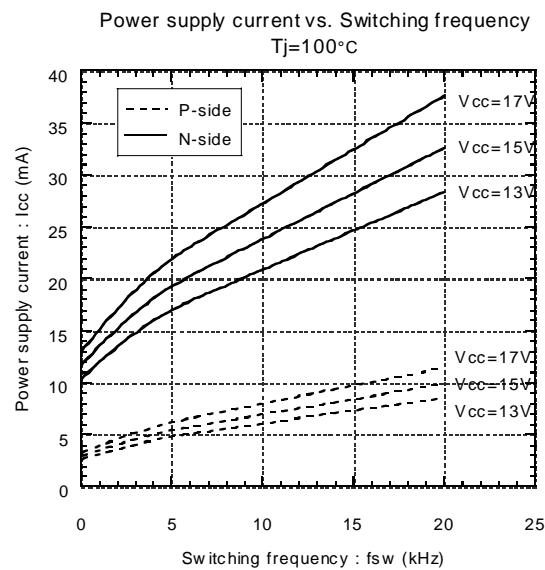

● Main circuit characteristics (Representative)

