

MITSUBISHI IGBT MODULES

CM900DU-24NF

HIGH POWER SWITCHING USE

CM900DU-24NF




- Ic900A
- VCES 1200V
- Insulated Type
- 2-elements in a pack

APPLICATION

UPS & General purpose inverters, etc

OUTLINE DRAWING & CIRCUIT DIAGRAM

Dimensions in mm

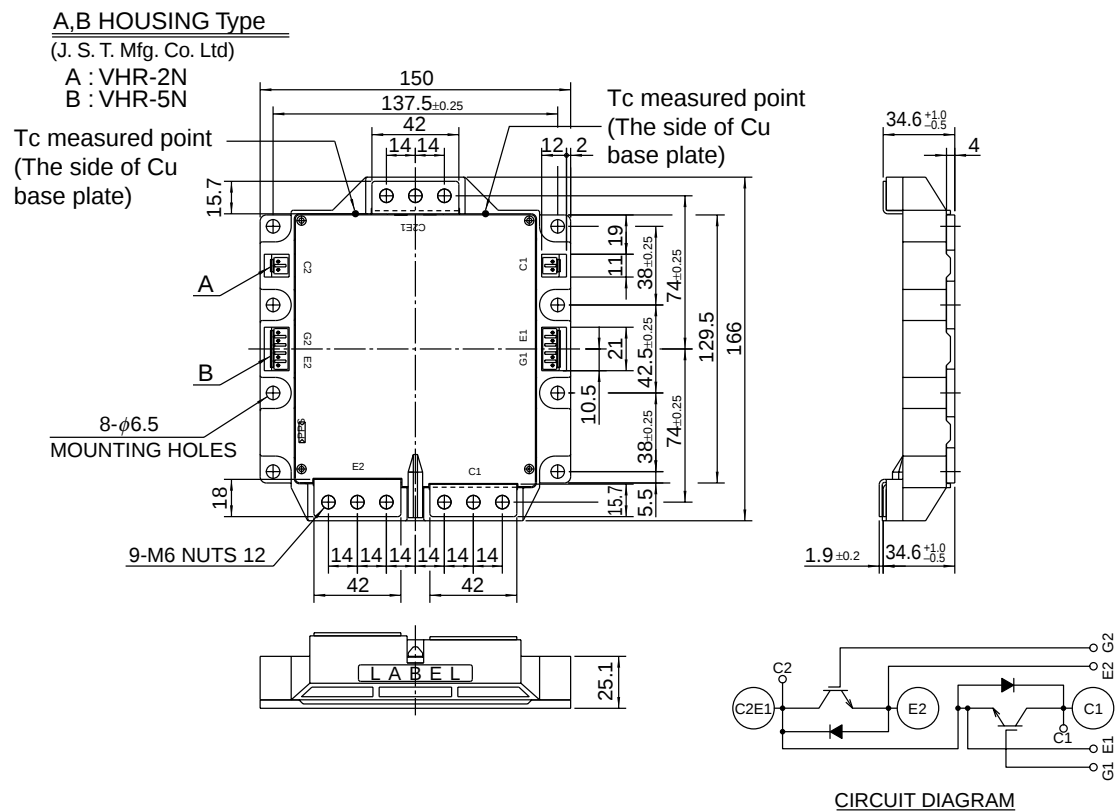

Mar. 2003

CM900DU-24NF

HIGH POWER SWITCHING USE

MAXIMUM RATINGS (Tj = 25°C)

Symbol	Parameter	Conditions	Ratings	Unit
V _{CES}	Collector-emitter voltage	G-E Short	1200	V
V _{GES}	Gate-emitter voltage	C-E Short	±20	V
I _C	Collector current	T _C = 25°C	900	A
I _{CM}		Pulse (Note 2)	1800	
I _E (Note 1)	Emitter current	T _C = 25°C	900	A
I _{EM} (Note 1)		Pulse (Note 2)	1800	
P _C (Note 3)	Maximum collector dissipation	T _C = 25°C	2550	W
T _j	Junction temperature		−40 ~ +150	°C
T _{stg}	Storage temperature		−40 ~ +125	°C
V _{iso}	Isolation voltage	Main terminal to base plate, AC 1 min.	2500	V
—	Torque strength	Main Terminal M6	3.5 ~ 4.5	N • m
—		Mounting holes M6	3.5 ~ 4.5	N • m
—	Weight	Typical value	1400	g

ELECTRICAL CHARACTERISTICS (Tj = 25°C)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
I _{CES}	Collector cutoff current	V _{CE} = V _{CES} , V _{GE} = 0V	—	—	1	mA
V _{GE(th)}	Gate-emitter threshold voltage	I _C = 90mA, V _{CE} = 10V	6	7	8	V
I _{GES}	Gate leakage current	V _{GE} = V _{CES} , V _{CE} = 0V	—	—	0.5	μA
V _{CE(sat)}	Collector-emitter saturation voltage	T _j = 25°C	—	1.8	2.5	V
		T _j = 125°C	—	2.0	—	
R _(lead)	Module lead resistance	I _C = 900A, terminal-chip	—	0.143	—	mΩ
C _{ies}	Input capacitance	V _{CE} = 10V V _{GE} = 0V	—	—	140	nF
C _{oes}	Output capacitance		—	—	16	
C _{res}	Reverse transfer capacitance		—	—	3	
Q _G	Total gate charge	V _{CC} = 600V, I _C = 900A, V _{GE} = 15V	—	4800	—	nC
t _{d(on)}	Turn-on delay time	V _{CC} = 600V, I _C = 900A V _{GE1} = V _{GE2} = 15V R _G = 0.35Ω, Inductive load switching operation	—	—	600	ns
t _r	Turn-on rise time		—	—	200	
t _{d(off)}	Turn-off delay time		—	—	800	
t _f	Turn-off fall time		—	—	300	
t _{rr} (Note 1)	Reverse recovery time		—	—	500	
Q _{rr} (Note 1)	Reverse recovery charge	I _E = 900A	—	50	—	μC
V _{EC} (Note 1)	Emitter-collector voltage	I _E = 900A, V _{GE} = 0V	—	—	3.4	V
R _{th(j-c)Q}	Thermal resistance*1	IGBT part (1/2 module)	—	—	0.049	°C/W
R _{th(j-c)R}		FWDi part (1/2 module)	—	—	0.078	
R _{th(c-f)}	Contact thermal resistance	Case to fin, Thermal compound applied*2 (1/2 module)	—	0.016	—	
R _{th(j-c')Q}	Thermal resistance	T _C measured point is just under the chips (IGBT part)	—	—	0.021*3	
R _{th(j-c')R}		T _C measured point is just under the chips (FWDi part)	—	—	0.034*3	
R _G	External gate resistance		0.35	—	2.2	Ω

Note 1. I_E, V_{EC}, t_{rr}, Q_{rr}, die/dt represent characteristics of the anti-parallel, emitter to collector free-wheel diode. (FWDi).

2. Pulse width and repetition rate should be such that the device junction temp. (T_j) does not exceed T_{jmax} rating.

3. Junction temperature (T_j) should not increase beyond 150°C.

*1 : T_C measured point is indicated in OUTLINE DRAWING.

*2 : Typical value is measured by using Shin-etsu Silicone "G-746".


*3 : If you use this value, R_{th(f-a)} should be measured just under the chips.

CM900DU-24NF


HIGH POWER SWITCHING USE

PERFORMANCE CURVES


OUTPUT CHARACTERISTICS
(TYPICAL)

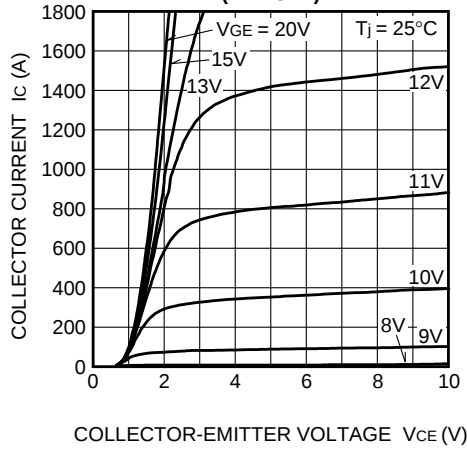


TRANSFER CHARACTERISTICS
(TYPICAL)

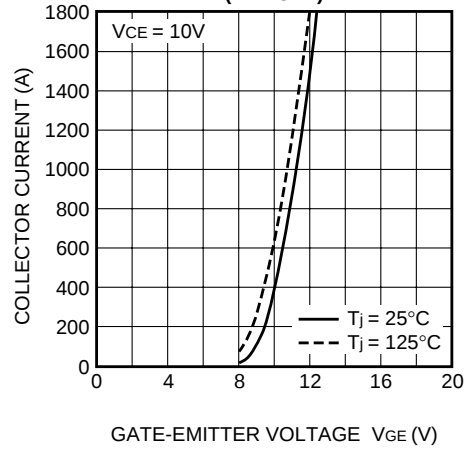


COLLECTOR-EMITTER SATURATION
VOLTAGE CHARACTERISTICS
(TYPICAL)

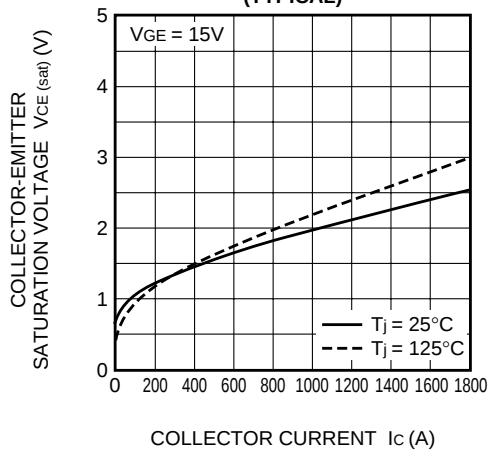


COLLECTOR-EMITTER SATURATION
VOLTAGE CHARACTERISTICS
(TYPICAL)

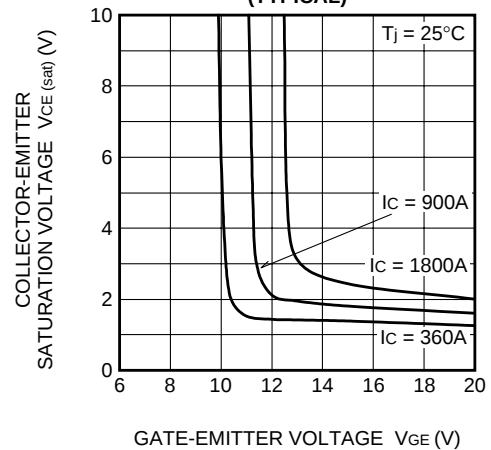

FREE-WHEEL DIODE
FORWARD CHARACTERISTICS
(TYPICAL)

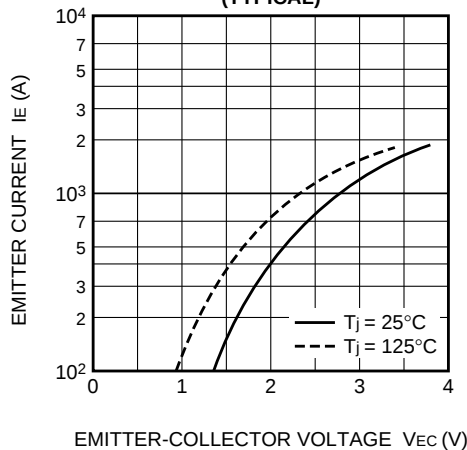


CAPACITANCE- V_{ce}
CHARACTERISTICS
(TYPICAL)

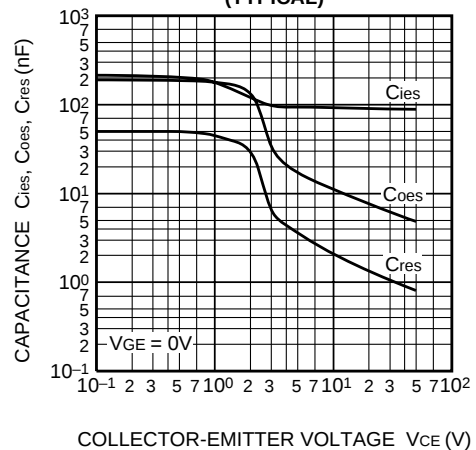


CM900DU-24NF

HIGH POWER SWITCHING USE


**HALF-BRIDGE
SWITCHING CHARACTERISTICS
(TYPICAL)**

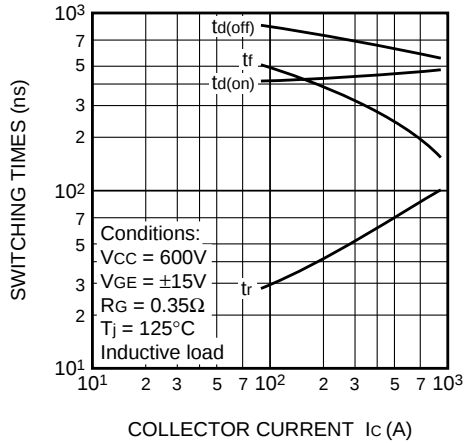


**REVERSE RECOVERY CHARACTERISTICS
OF FREE-WHEEL DIODE
(TYPICAL)**

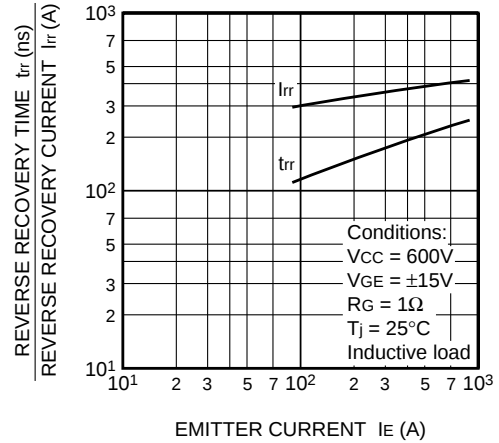


**TRANSIENT THERMAL
IMPEDANCE CHARACTERISTICS
(IGBT part & FWDi part)**

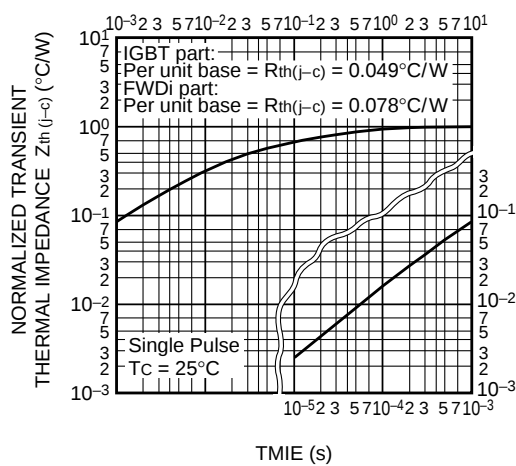


**GATE CHARGE
CHARACTERISTICS
(TYPICAL)**

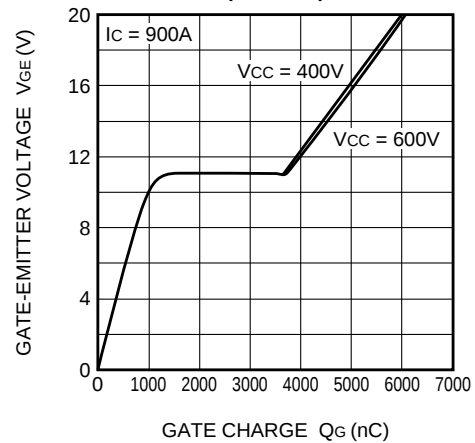

**I_c -Esw
(TYPICAL)**

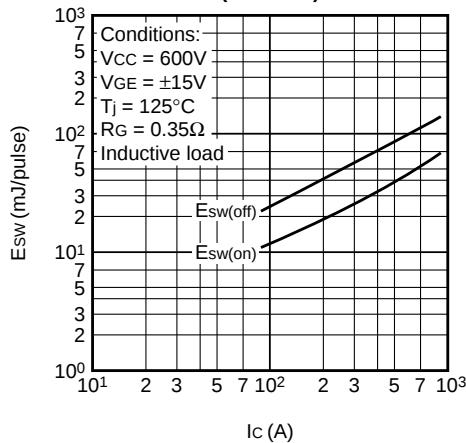

**R_G -Esw
(TYPICAL)**

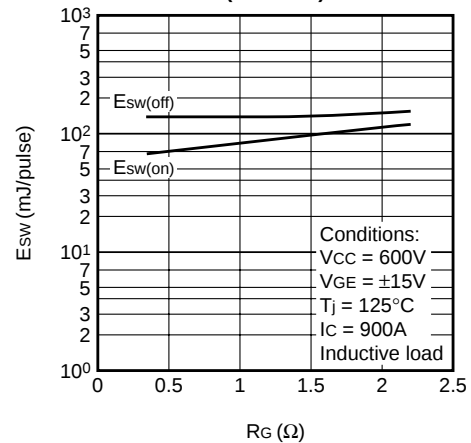

CM900DU-24NF

HIGH POWER SWITCHING USE

