



FS-V11P

Fibre Amplifier, Cable Type, Main Unit, PNP

**[Discontinued model]**

This model has been discontinued.

Recommended Replaceable Products

- Digital Fibre optic Sensor
FS-N40 series

To contact us:

+63-(0)2-8981-5000

SPECIFICATIONS


Model		FS-V11P
Type		Main unit
Output		PNP
Light source		Red LED
Response time		250 μ s (FINE) /500 μ s (TURBO) /1 ms (SUPER TURBO)
Operation mode		LIGHT-ON/DARK-ON (switch-selectable)
Indicator lamp		Display indicator: Red LED Digital LED monitor: Seven segments, four digits, red LED Bar LED monitor: One orange LED and six green LEDs
Timer function		ON-delay: 40 ms /OFF-delay: 10 ms /Timer OFF (switch-selectable)
Control output		PNP open-collector 100 mA max. (24 VDC max.), Residual voltage: 1 V max.
Protection circuit		Reversed polarity protection, over-current protection, surge absorber
Unit expansion		Up to 16 expansion units can be connected (a total of 17 units). ^{*1}
Mutual interference suppression		FINE : 4, TURBO/SUPER: 8
Rating	Power voltage	12 to 24 VDC \pm 10 %, Ripple (P-P) 10 % or less ^{*2}
	Current consumption	50 mA or less
Environmental resistance	Ambient light	Incandescent lamp: 10,000 lux max., Sunlight: 20,000 lux max.
	Ambient temperature	-10 to +55 °C (No freezing)
	Relative humidity	35 to 85 % RH (No condensation)
	Vibration resistance	10 to 55 Hz, Double amplitude 1.5 mm, 2 hours in each of the X, Y, and Z directions
	Shock resistance	500 m/s ² , 3 times in each of the X, Y, and Z directions
Case material		Polycarbonate
Weight		Approx. 80 g

^{*1} If more than one unit is used together, the ambient temperature varies with the conditions below. Mount the units on the DIN rail with mounting brackets and check that the output current is 20 mA or less.
3 to 10 Units: -10 to 50°C, 11 to 16 Units: -10 to 45°C

^{*2} Neither the FS-V12 nor the FS-V10 can be used as a standalone unit.


Dimensions

* Download CAD file or product manual for larger image/text and more detail.

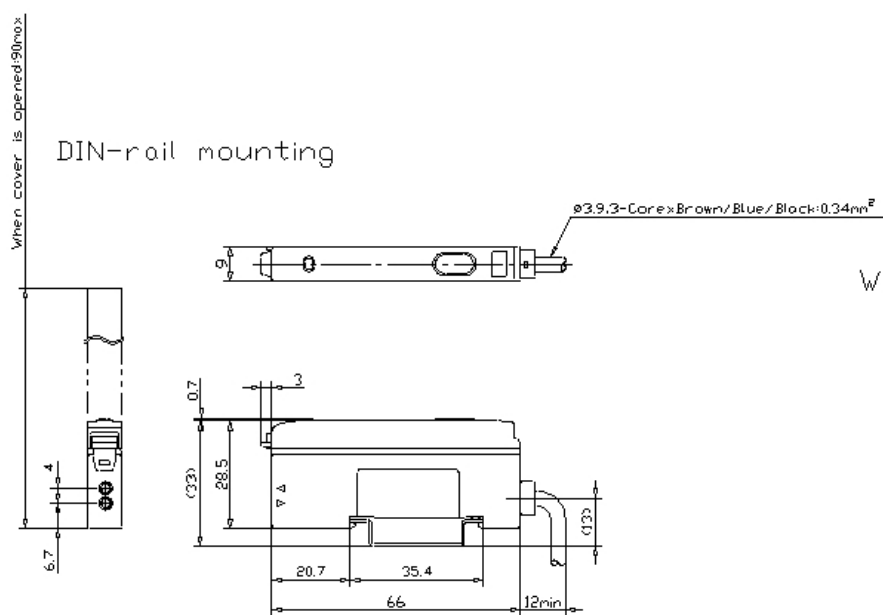


FS-V11

When mounting bracket is attached

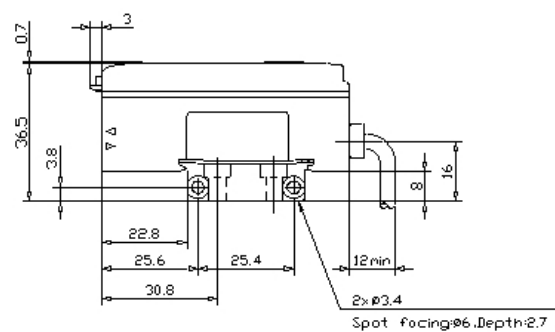


Mounting bracket bottom view

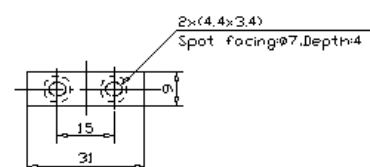

I/O Circuit Connection diagram

* Download CAD file or product manual for larger image/text and more detail.

I/O Circuit

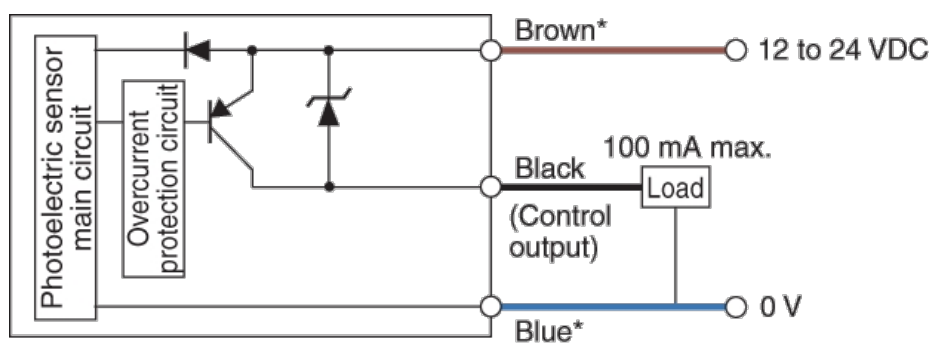

*FS-V11P only