





トランジスタ・モジュール [NPN, 1アーム (DCチョップ用)]

- DCチョップ用
- ダーリントン・トランジスタ1個内蔵
- フリーホイール・ダイオード付
- 絶縁形
- UL認定済

Yellow Card No.: E80276 (N)
File No.: E80271

■等価回路




注1. $I_C = 1A$, $V_{EB} = 2V$, #印は V_{CEX} ($V_{EB} = 2V$)。 注2. 60Hz, 単相半波1サイクル波高値。 注3. $T_c = 25^\circ C$ 。 注4. AC, 1分間。


型 名	最 大 定 格 (T _J = 25℃)										電 気 的 特 性									
	V _{CE0}	V _{CEX (SUS)}	V _{EB0}	I _C	I _B	I _F	I _{FM (注2)}	P _{C (注3)}	T _J	T _{JA}	V _{ISO (注4)}	I _{CEX}	V _{CE}	V _{EB}	I _{EB0}	V _{CE0 (SUS)}	h _{FE}	V _{CE}	I _C	
	(V)	(注1) (V)	(V)	(A)	(A)	(A)	(A)	(W)	(℃)	(℃)	(V)	(mA)	(V)	(V)	(mA)	(V)	(A)	(V)	(A)	
													最大			最大	最小	最小		
QM30E2Y-H	600	600	7	30	1.8	30	600	250	150	-40~125	2500	1	600	2	200	7		75/100	2/5	30
QM30E2Y-2H	1000	1000	7	30	2.0	30	600	310	150	-40~125	2500	1	1000	2	200	7		75/100	2.8/5	30
QM30E3Y-H	600	600	7	30	1.8	30	600	250	150	-40~125	2500	1	600	2	200	7		75/100	2/5	30
QM30E3Y-2H	1000	1000	7	30	2.0	30	600	310	150	-40~125	2500	1	1000	2	200	7		75/100	2.8/5	30
QM50E2Y-H	600	600	7	50	3.0	50	500	310	150	-40~125	2500	1	600	2	200	7		75/100	2/5	50
QM50E2Y-2H	1000	1000	7	50	3.0	50	500	400	150	-40~125	2500	1	1000	2	200	7		75/100	2.8/5	50
QM50E3Y-H	600	600	7	50	3.0	50	500	310	150	-40~125	2500	1	600	2	200	7		75/100	2/5	50
QM50E3Y-2H	1000	1000	7	50	3.0	50	500	400	150	-40~125	2500	1	1000	2	200	7		75/100	2.8/5	50
QM75E2Y-H	600	600	7	75	4.5	75	750	350	150	-40~125	2500	1	600	2	200	7		75/100	2/5	75
QM75E2Y-2H	1000	1000	7	75	4.0	75	750	500	150	-40~125	2500	1	1000	2	100	7		75/100	2.8/5	75
QM75E3Y-H	600	600	7	75	4.5	75	750	350	150	-40~125	2500	1	600	2	200	7		75/100	2/5	75
QM75E3Y-2H	1000	1000	7	75	4.0	75	750	500	150	-40~125	2500	1	1000	2	100	7		75/100	2.8/5	75
QM100E2Y-H	600	600	7	100	6.0	100	1000	620	150	-40~125	2500	2	600	2	300	7		75/100	2/5	100
QM100E2Y-2H	1000	1000	7	100	5.0	100	1000	800	150	-40~125	2500	2	1000	2	400	7		75/100	2.8/5	100
QM100E3Y-H	600	600	7	100	6.0	100	1000	620	150	-40~125	2500	2	600	2	300	7		75/100	2/5	100
QM100E3Y-2H	1000	1000	7	100	5.0	100	1000	800	150	-40~125	2500	2	1000	2	400	7		75/100	2.8/5	100
QM150E2Y-H	600	600	7	150	9.0	150	1500	690	150	-40~125	2500	2	600	2	150	7		75/100	2/5	150
QM150E2Y-2H	1000	1000	7	150	8.0	150	1500	1000	150	-40~125	2500	2	1000	2	200	7		75/100	2.8/5	150
QM150E3Y-H	600	600	7	150	9.0	150	1500	690	150	-40~125	2500	2	600	2	150	7		75/100	2/5	150
QM150E3Y-2H	1000	1000	7	150	8.0	150	1500	1000	150	-40~125	2500	2	1000	2	200	7		75/100	2.8/5	150

■スイッチング時間測定回路


EY-2A






EY-2B



EY-2C



EY-2D



ベース信号

(T _J = 25℃)										エミッタ・コレクタ間ダイオード					熱抵抗		等価回路	外形図	記 事	型 名		
飽和電圧 (V)		I _C	I _B	スイッチング時間 (μs)			I _{B1}	I _{B2}	V _{CC}	I _C	V _F (V)	t _{rr}		I _F	V _R	di/dt (A/μs)					θ _{J-C} (℃/W)	
V _{CE}	V _{BE}			t _{on}	t _{off}	t _f						最大	I _F								最大	(A)
最大	最大	(A)	(A)	最大	最大	最大	(A)	(A)	(V)	(A)	最大	最大	(A)	(V)	(A/μs)	最大	最大					
2.0	2.5	30	0.4	1.5	12	3.0	0.6	-0.6	300	30	1.85	30				0.5	2.0	EY-1A	M-4A1B	QM30E2Y-H		
2.5	3.5	30	0.6	2.5	15	3.0	0.6	-0.6	600	30	1.8	30				0.4	1.5	EY-2A	M-4A1B	QM30E2Y-2H		
2.0	2.5	30	0.4	1.5	12	3.0	0.6	-0.6	300	30	1.85	30				0.5	2.0	EY-1C	M-4A1B	QM30E3Y-H		
2.5	3.5	30	0.6	2.5	15	3.0	0.6	-0.6	600	30	1.8	30				0.4	1.5	EY-2C	M-4A1B	QM30E3Y-2H		
2.0	2.5	50	0.65	1.5	12	3.0	1.0	-1.0	300	50	1.75	50				0.4	1.3	EY-1A	M-4A1B	QM50E2Y-H		
2.5	3.5	50	1.0	2.5	15	3.0	1.0	-1.0	600	50	1.8	50				0.31	1.2	EY-2A	M-4A1B	QM50E2Y-2H		
2.0	2.5	50	0.65	1.5	12	3.0	1.0	-1.0	300	50	1.75	50				0.4	1.3	EY-1C	M-4A1B	QM50E3Y-H		
2.5	3.5	50	1.0	2.5	15	3.0	1.0	-1.0	600	50	1.8	50				0.31	1.2	EY-2C	M-4A1B	QM50E3Y-2H		
2.0	2.5	75	1.0	2.5	12	3.0	1.5	-1.5	300	75	1.85	75				0.35	1.3	EY-1A	M-4A1B	QM75E2Y-H		
2.5	3.5	75	1.5	2.5	15	3.0	1.5	-1.5	600	75	1.8	75				0.25	1.2	EY-2A	M-5A1B	QM75E2Y-2H		
2.0	2.5	75	1.0	2.5	12	3.0	1.5	-1.5	300	75	1.85	75				0.35	1.3	EY-1C	M-4A1B	QM75E3Y-H		
2.5	3.5	75	1.5	2.5	15	3.0	1.5	-1.5	600	75	1.8	75				0.25	1.2	EY-2C	M-5A1B	QM75E3Y-2H		
2.0	2.5	100	1.3	2.0	12	3.0	2.0	-2.0	300	100	1.75	100				0.2	0.65	EY-1B	M-8A1B	QM100E2Y-H		
2.5	3.5	100	2.0	3.0	15	3.0	2.0	-2.0	600	100	1.8	100				0.155	0.65	EY-2B	M-9A1A	QM100E2Y-2H		
2.0	2.5	100	1.3	2.0	12	3.0	2.0	-2.0	300	100	1.75	100				0.2	0.65	EY-1D	M-8A1B	QM100E3Y-H		
2.5	3.5	100	2.0	3.0	15	3.0	2.0	-2.0	600	100	1.8	100				0.155	0.65	EY-2D	M-9A1A	QM100E3Y-2H		
2.0	2.5	150	2.0	2.5	12	3.0	3.0	-3.0	300	150	1.85	150				0.18	0.6	EY-1B	M-8A1B	QM150E2Y-H		
2.5	3.5	150	3.0	3.0	15	3.0	3.0	-3.0	600	150	1.8	150				0.125	0.6	EY-2B	M-9A1A	QM150E2Y-2H		
2.0	2.5	150	2.0	2.5	12	3.0	3.0	-3.0	300	150	1.85	150				0.18	0.6	EY-1D	M-8A1B	QM150E3Y-H		
2.5	3.5	150	3.0	3.0	15	3.0	3.0	-3.0	600	150	1.8	150				0.125	0.6	EY-2D	M-9A1A	QM150E3Y-2H		

FD-1




FD-2




FD-3




FD-4

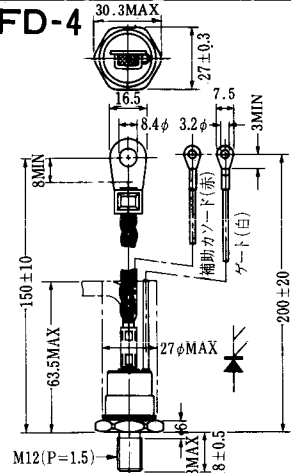


FD-5

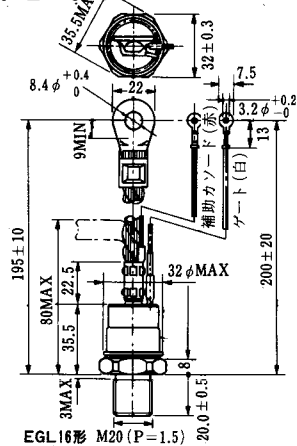


FD-6

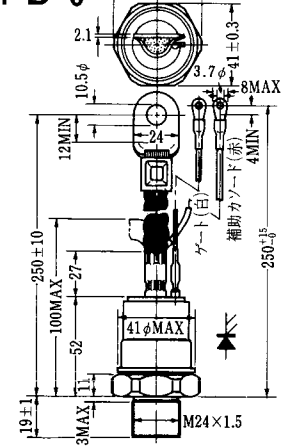

FD-7

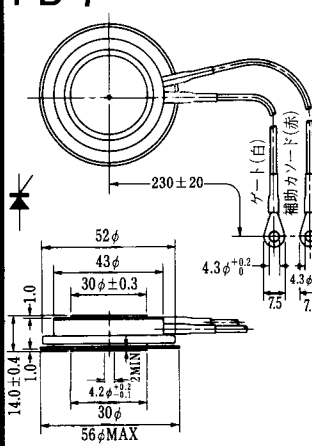


FD-8

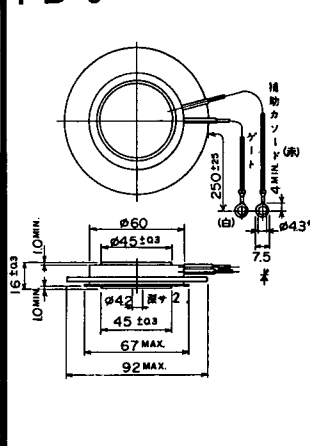

FD-9




FD-10

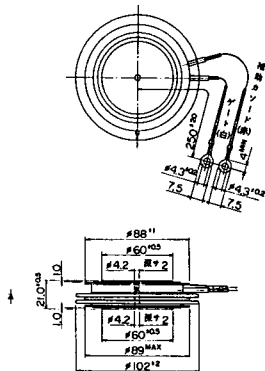


FD-11

FD-12


H-1

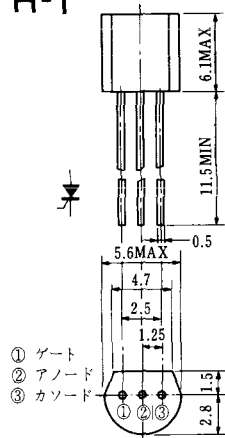


H-2

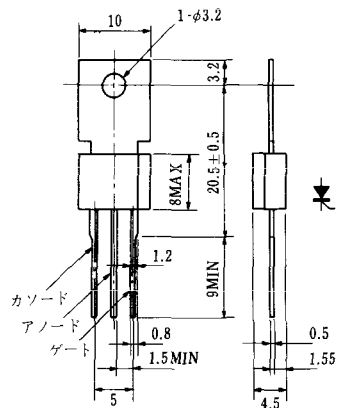


H-3




H-4

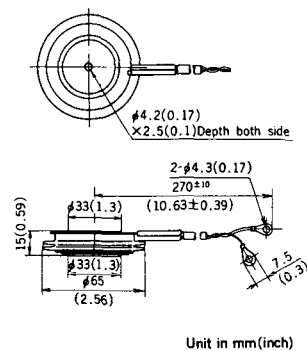


H-5




H-6

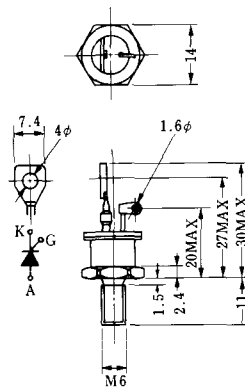


H-7

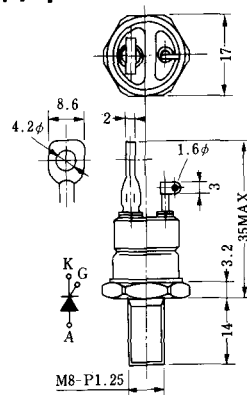


H-8A




H-8B

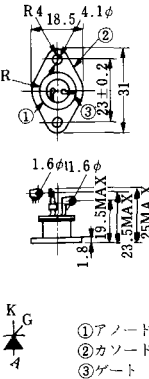

H-9A




H-9B




- ① アノード
- ② カソード
- ③ ゲート


H-10

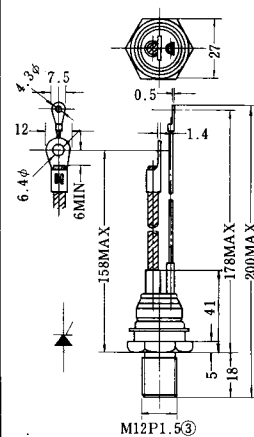


H-11

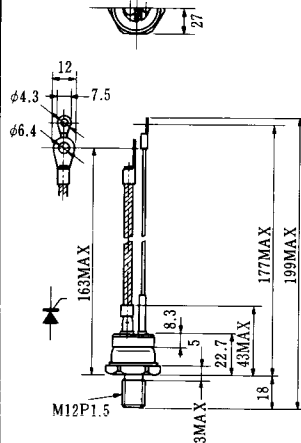


H-12

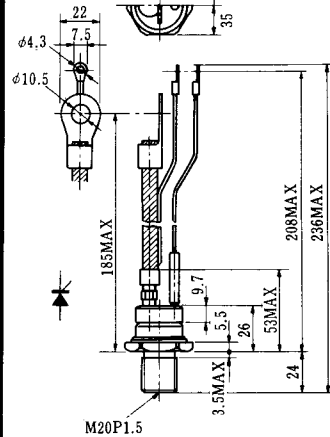


H-13

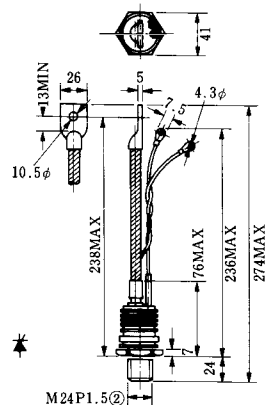


H-14




H-15




H-16

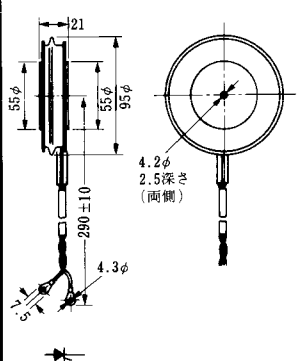


H-17

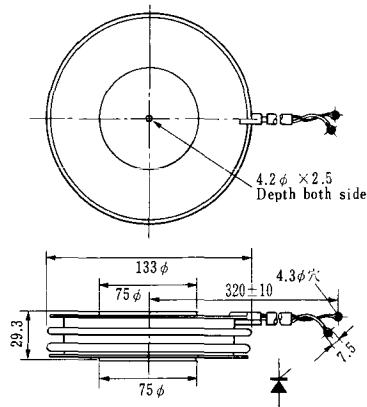


H-18




H-19

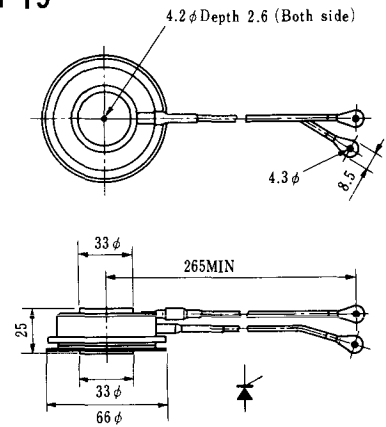


H-20

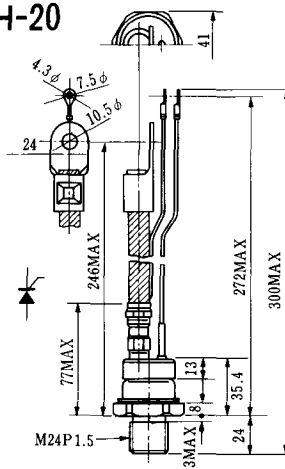

H-21

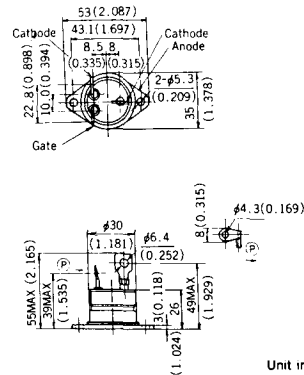

H-22

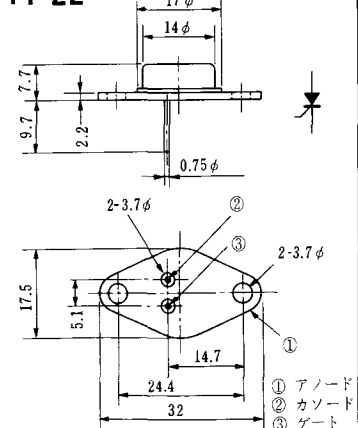

H-23



H-24



H-25



H-26




Type	Direction of polarity
CA12	

H-27



Type	Direction of polarity
CF11V	

H-28

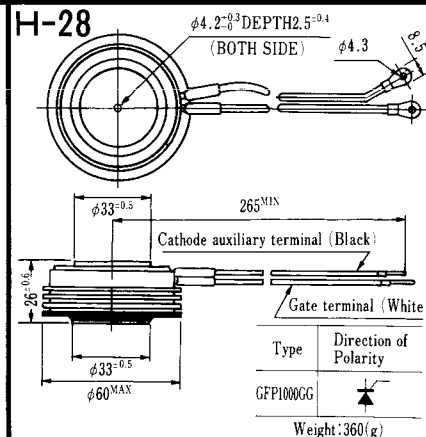

Note: The thickness is a dimension in press at the rated mounting force.

H-29



Note : The thickness is a dimension in press at the rated mounting force. Weight: 870(g)

H-30



Note : The thickness is a dimension in press at the rated mounting force. Weight: 1,460(g)

HT-1



Unit in mm (inch)

HT-2




HT-3



HT-4



HT-5

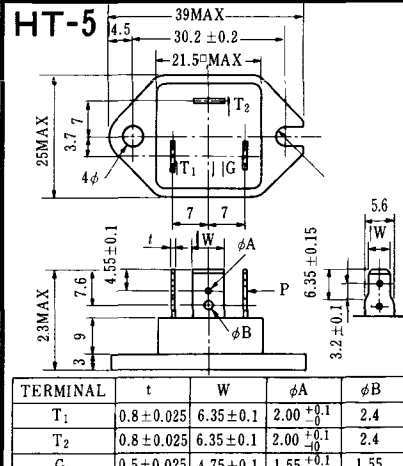

《寸法図単位：mm》

M-1




M-2



M-3




M-4

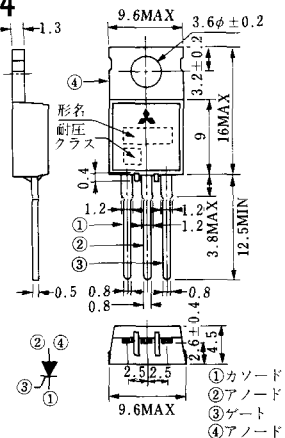


M-5




M-6

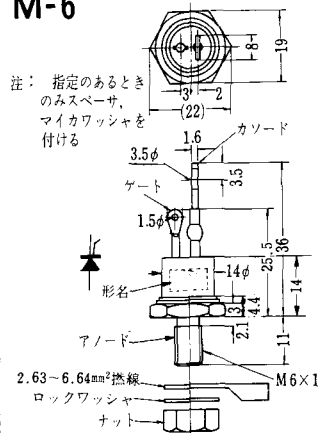

M-7

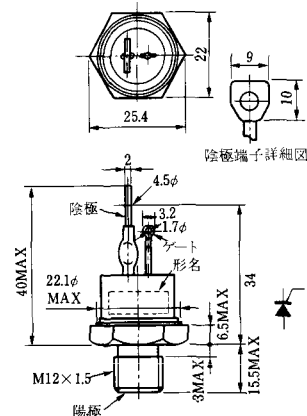

M-8

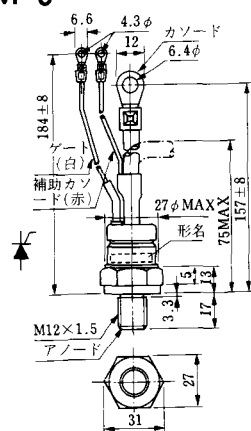


M-9



M-10



M-11

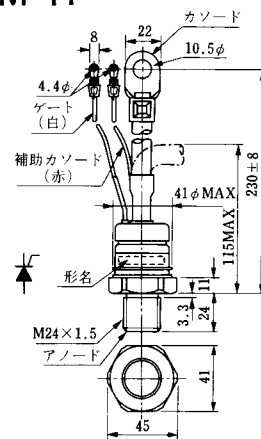

M-12




M-13




M-14



M-15

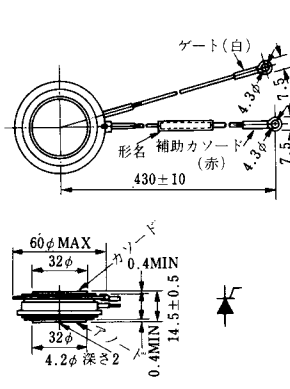

M-16

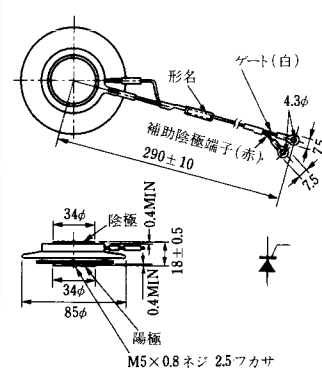

M-17



M-18



M-19




M-20



M-21



M-22

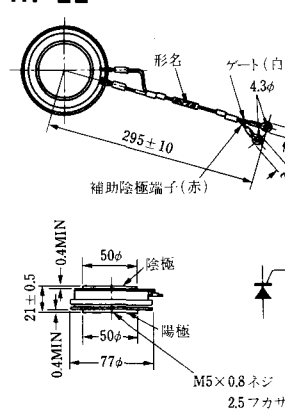

M-23




M-24



M-25




M-26

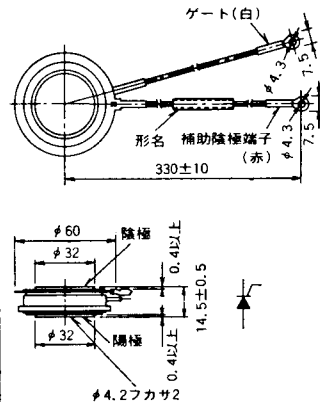

M-27



M-28

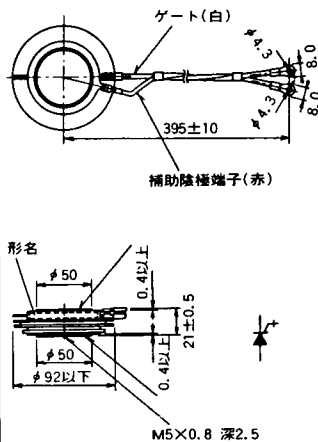

M-29



M-30



M-31



M-32



M-33



M-34




MT-1




MT-2



MT-3

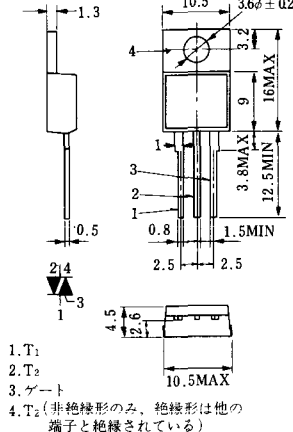

MT-4

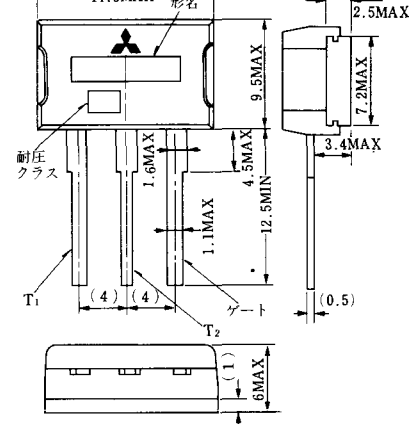


MT-5



MT-6




MT-7

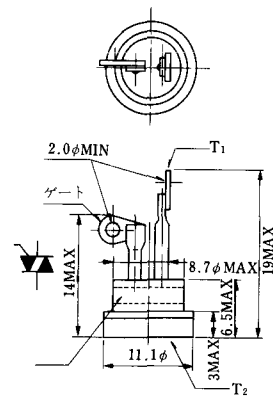


MT-8




MT-9

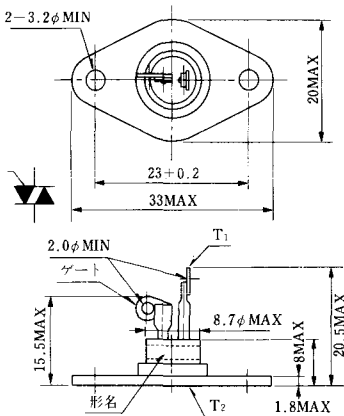


MT-10

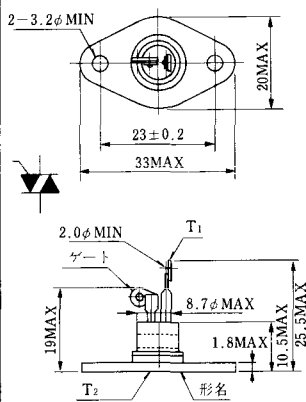


MT-11

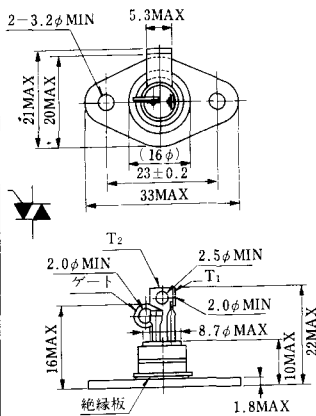


MT-12

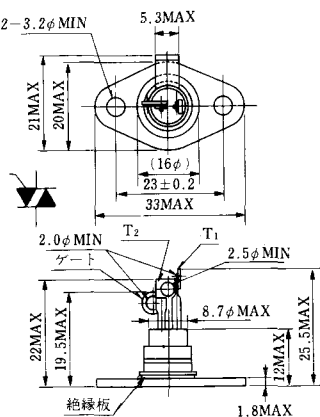


MT-13

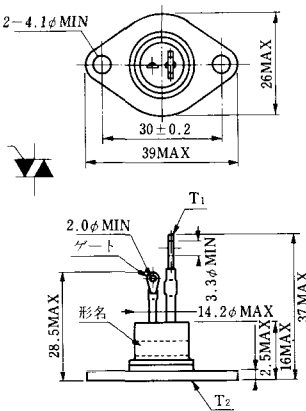

MT-14

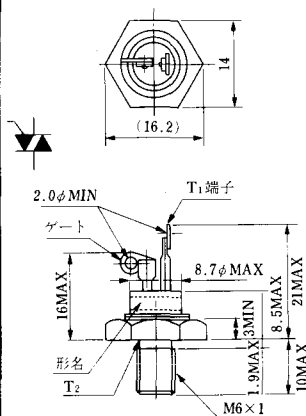

MT-15

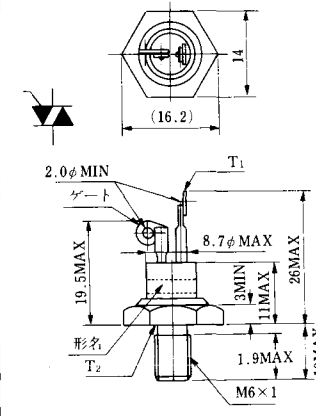

MT-16



MT-17



MT-18



MT-19




MT-20



MT-21




MT-22

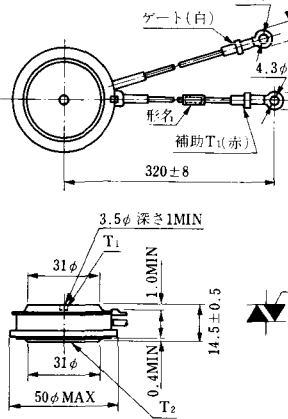

MT-23




MT-24



TO - 3P

- ① T1 端子
- ② T2 端子
- ③ ゲート端子
- ④ T2 端子

N-1

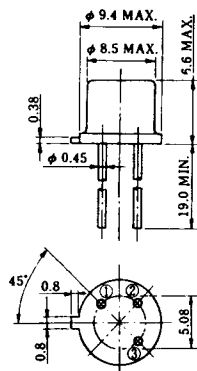

電極接続

- ① カソード
- ② ゲート
- ③ アノード


N-2



電極接続

- ① ヤート
- ② アノード
- ③ カソード


N-3

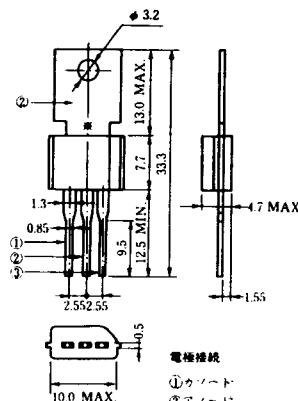

電極接続

- ① カソード
- ② アノード
- ③ ゲート


N-4

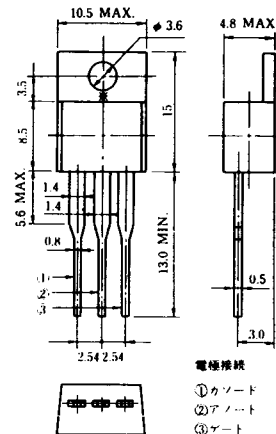


電極接続

- ① カソード
- ② アノード
- ③ ゲート

N-5

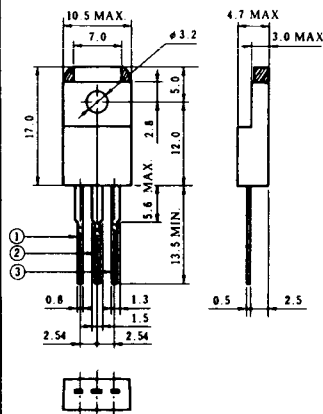


N-6

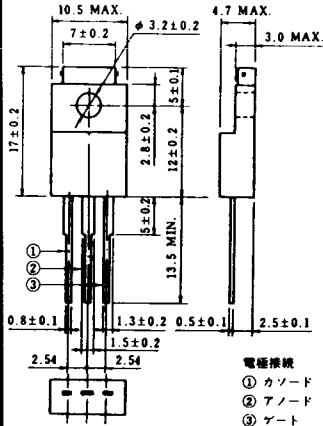


電極接続

- ① カソード
- ② アノード
- ③ ゲート

N-7

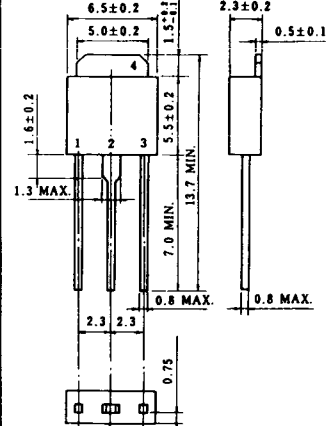

N-8

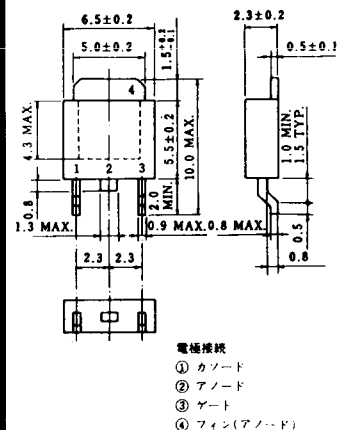

電極接続

- ① カソード
- ② アノード
- ③ ゲート
- ④ フィン(アノード)

N-9



電極接続

K : カソード

A : アノード

G : ゲート

NA-1



電極接続

1. ゲート
2. アノード
3. カソード

JEDEC: TO-92

NA-2



電極接続

1. カソード
2. アノード
3. ゲート

JEDEC: TO-202AA



NI-3

NI-4

NI-5

NI-6


NI-7

NI-8

《寸法図単位:mm》


NI-9

259RW
309RW

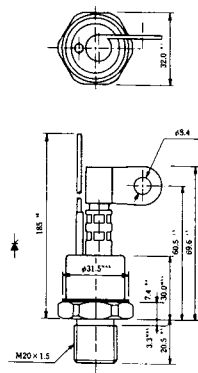


NI-10

259RW_JL
309RW_JL

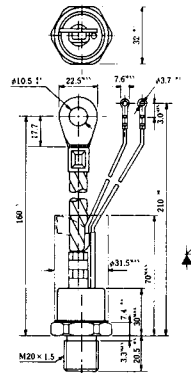

NI-11


103PA
253PA
503PA
553PA
803PA
103PLE
103PLG
103PLH
203PLG
253PLE
253PLH
353PLG
403PLE
403PLH



型名	103PA, 103PLE, 103PLG, 103PLH	253PA, 203PLG, 253PLE, 253PLH	503PA, 553PA, 353PLG, 403PLE, 403PLH	803PA
寸法				
A	40	46	55.5	55.5
B	16	22	30	32
C	36	42	50.5	50.5


NI-12

403PAB
503PAB
503PLB




NI-13

1003PA
1003PAB
1003PLF
1003PLH
1503PA




NI-14

358RGA



NI-15

359RGA




NI-16

503PLF
503PLH



NI-17

3003PA




NI-18

353PGA「E




NI-19

603PGA, 603PGA「A, 803PGA




NI-20

603PGA「E




NI-21

1001PGB「E




NI-22

1201PGA, 1201PGA「A, 1401PGA




NI-23

1201PGA「E



NI-24

2001PGB[®] JE



NI-25

NI-26

NT-1



電線接続
① T₁
② ゲート
③ T₂

NT-2



電線接続
① T₁
② ゲート
③ T₂

NT-3




電線接続
① T₁
② T₂
③ ゲート

NT-4




電線接続
① T₁
② T₂
③ G

NT-5

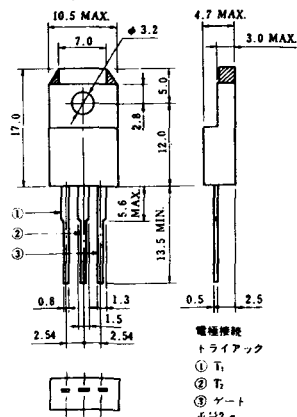


電線接続
トライアック
① T₁
② T₂
③ ゲート
④ 2K

NT-6

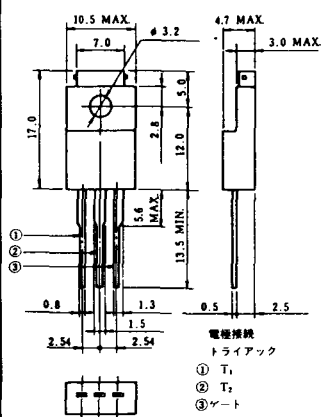


電線接続
トライアック
① T₁
② T₂
③ ゲート
④ 2K

NT-7

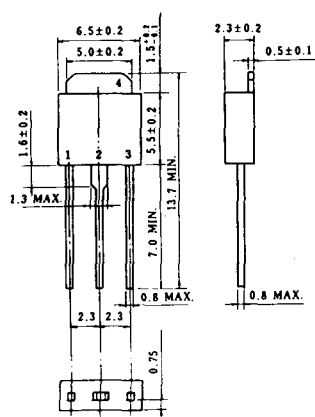

NT-8

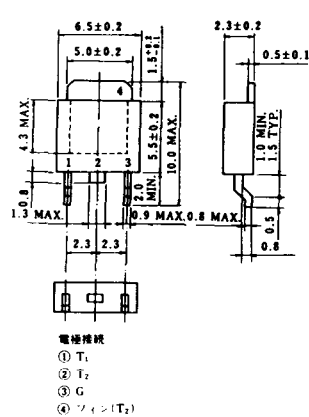


電線接続
① T₁
② T₂
③ G
④ ツイン(T₂)


SA-1




SA-2

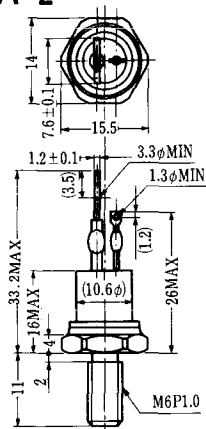


SA-3

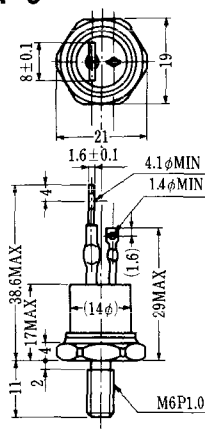


SA-4

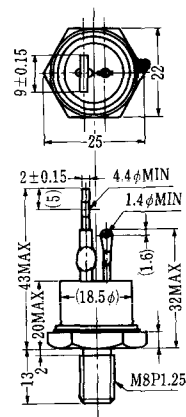

SA-5

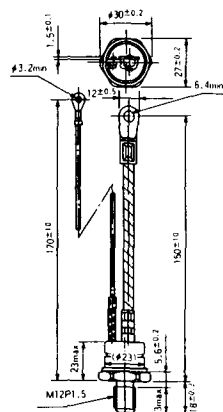


SA-6

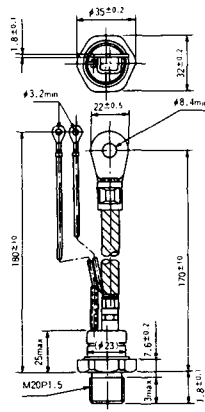


SA-7



SA-8

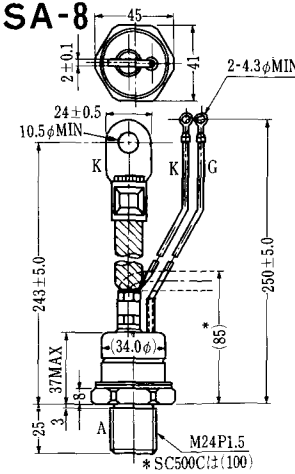

SAT-1

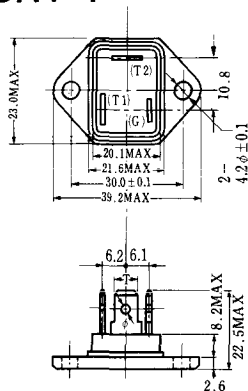


T1端子:ファストン250($T=6.35$, $t=0.8$, $\phi=1.65$)
T2端子:ファストン250($T=6.35$, $t=0.8$, $\phi=1.65$)
G端子:ファストン187($T=4.75$, $t=0.5$, $\phi=1.3$)

SAT-2



SAT-3

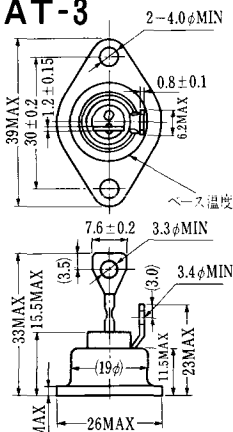

SAT-4



SAT-5



SAT-6




SAT-7



SAT-8




SAT-9.

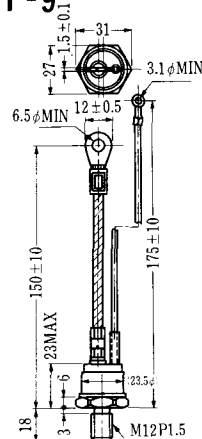

SAT-10




SAT-11

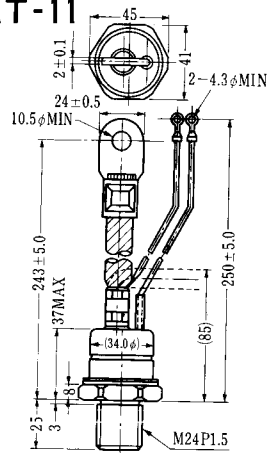


SY-1(1096A)



SY-2(1151)

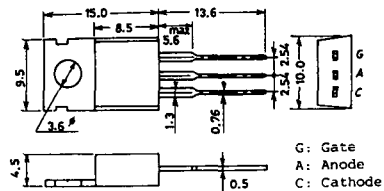

SY-3(1104)



SY-4(1150)



1097A



G: Gate

1102




1141



1142



1144

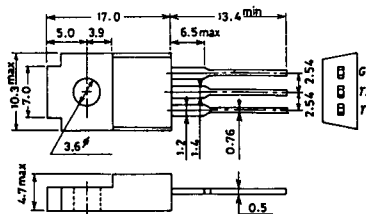

1155



1192A




G: Gate


T-1 (13-5A1A)



T-2 (13-8A1A)

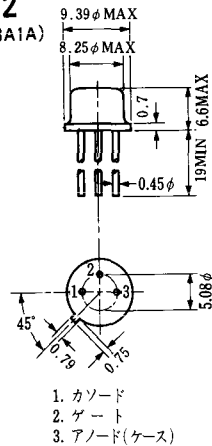

T-3 (13-8C1A)

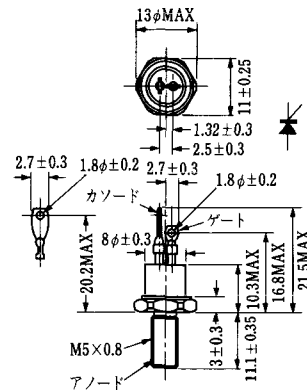


T-4 (13-10A1A)



T-5 (13-10B1A)




T-6 (13-11D1A)

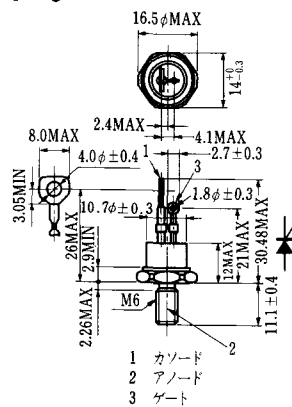

T-7 (13-13A1A)



T-8 (13-13B1A)

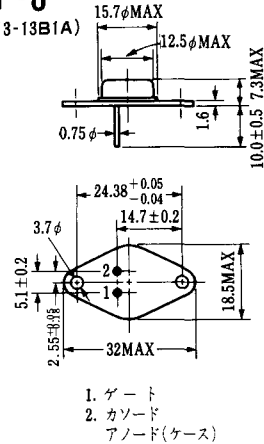

T-17 (13-42A1A)



T-18 (13-45D1A)



T-19 (13-52B1A)




T-20 (13-52C1A)




T-21 (13-60A1A)




T-22 (13-70C1A)





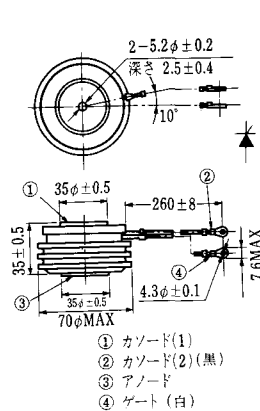


T-23 (13-78A1A)

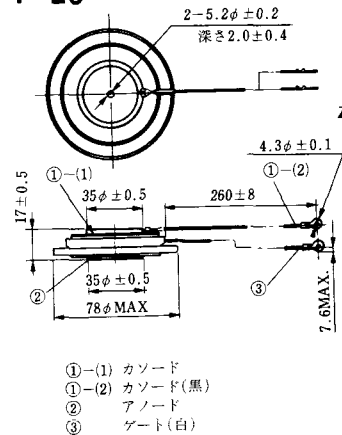

T-24 (13-100C1A)

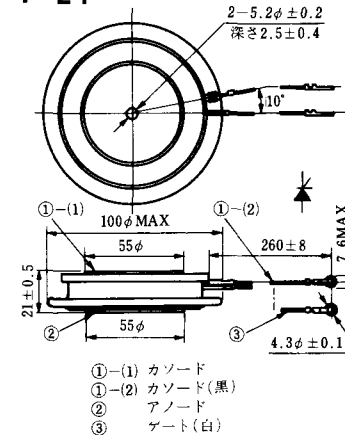

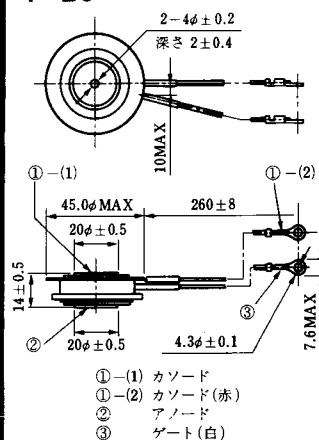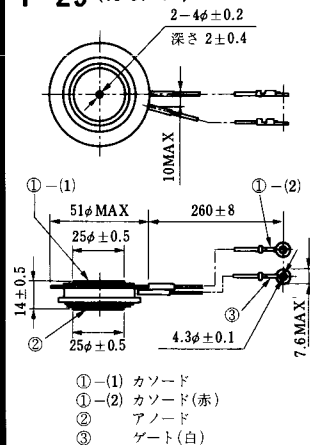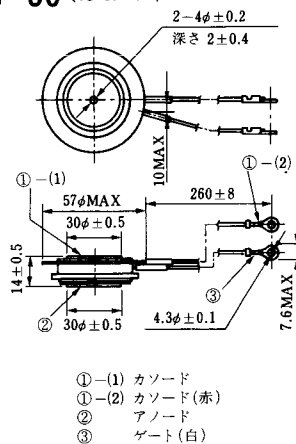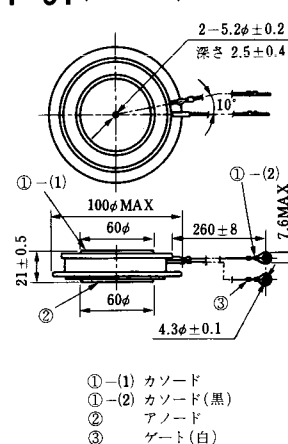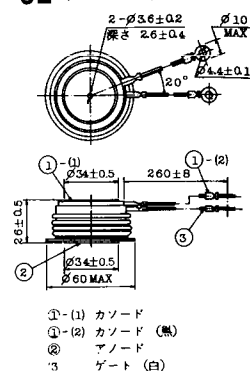T-25 (13-120A2A)**T-26** (13-150A1A)**T-27** (13-37A1A)**T-28** (13-45E1A)**T-29** (13-51A1A)**T-30** (13-57A1A)**T-31** (13-100E1A)**T-32** (13-60E3A)


T-41 (13-28A2A)




T-42 (13-45F1A)



T-43 (13-60E2A)

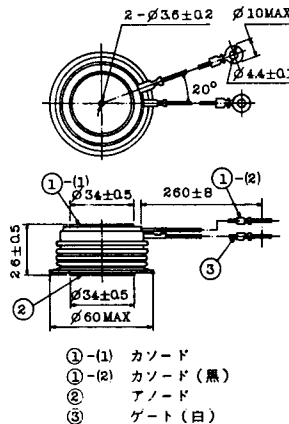

T-44 (13-36A1A)

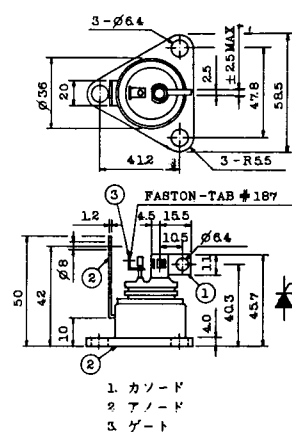


T-45 (13-51B1A)




T-46 (13-36B1A)




T-47 (13-60E1A)

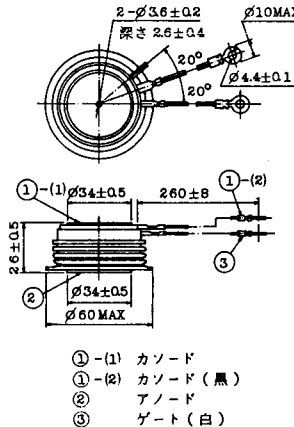


T-48 (13-93C1A)

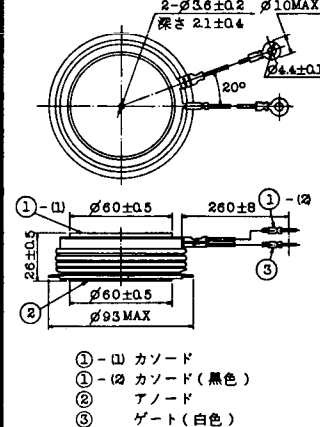


T-49 (13-75A1A)

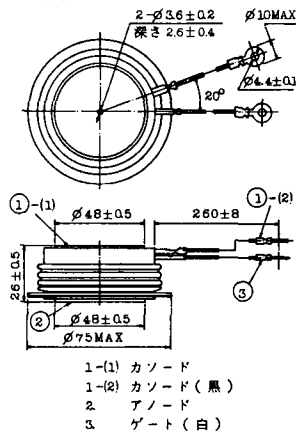


T-50 (13-10A3A)

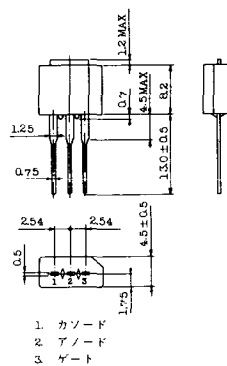


T-51 (13-10D1A)

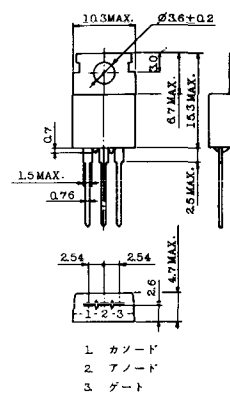


T-52 (13-10D2A)

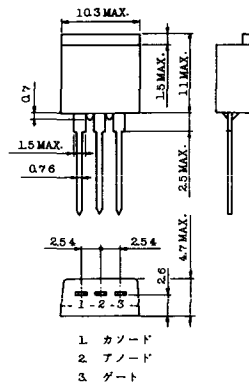


T-53 (13-10E1B)

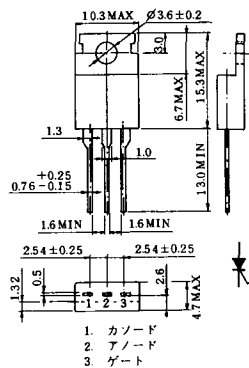


T-54 (13-10F1B)

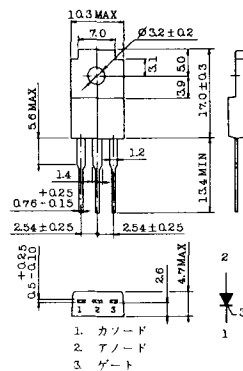


T-55 (13-5A1D)

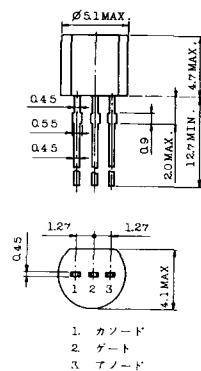


T-56 (13-13C1A)

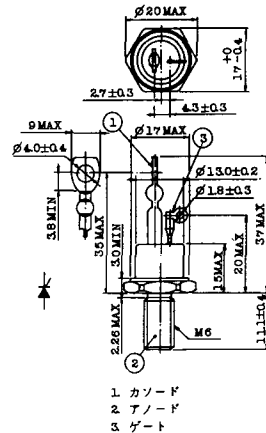


T-57 (12-16C1A)

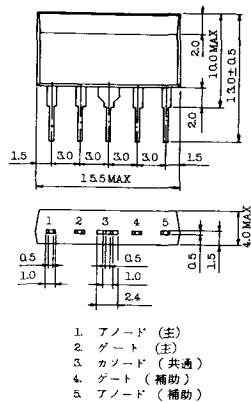


T-58 (13-10H1B)

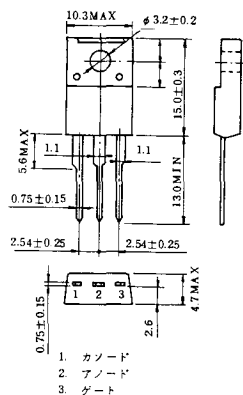


T-59 (13-120A1A)

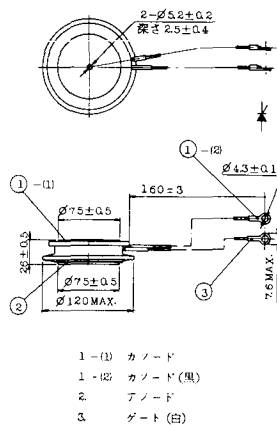


T-60

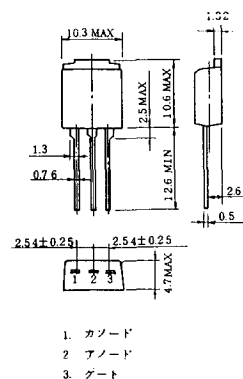


T-61 (13-5B1A)

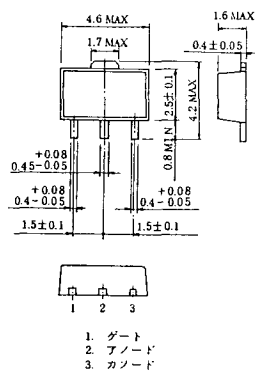


T-62 (13-10H1A)

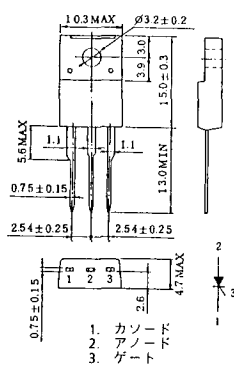

T-63 (13-16A1B)

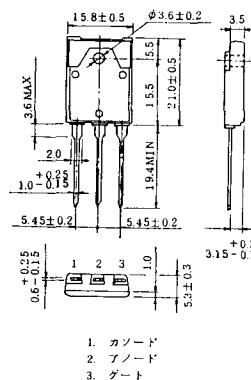


TT-1




1. ゲート
2. T₂
3. T₁

TT-2




1. T₁
2. ゲート
3. T₂

TT-3




1. T₁
2. T₂
3. ゲート

TT-4




1. T₁
2. T₂
3. ゲート

TT-5




1. T₁
2. T₂
3. ゲート

TT-6




1. T₁
2. T₂ (放熱板)
3. ゲート

TT-7



1. T₁
2. T₂
3. ゲート

TT-8



1. ゲート
2. T₁
- T₂ (ケース)

TT-9




1. ゲート
2. T₁
3. T₂ (ケース)

TT-10



1. ゲート
2. T₁
3. T₂ (ケース)

TT-11



1. ゲート (ファストン端子 #187)
2. T₁ (" #250)
3. T₂ (" #250)


TT-12



ゲート端子詳細


- ① ゲート (ファストン端子 #187)
- ② T₁ (" #250)
- ③ T₂ (" #250)

TT-13

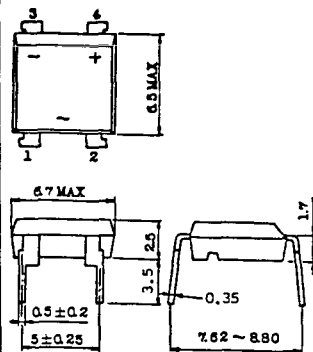


- 1, 2: T₂
- 3: GATE
- 4: T₁

TT-14

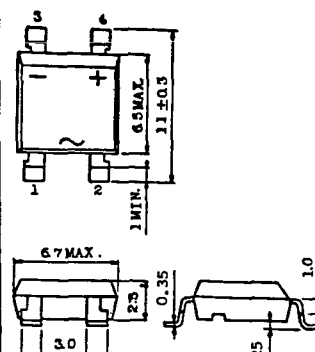


- 1, 2: T₂
- 3: GATE
- 4: T₁

TT-15 (13-14A1B)

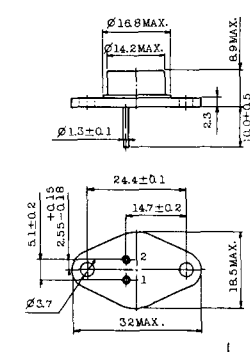

1. ゲート
2. T₁
- T₂ (ケース)

TT-16 (13-16A1A)

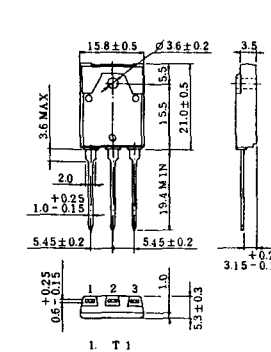


1. T₁
2. T₂
3. ゲート


TS-1




TS-2

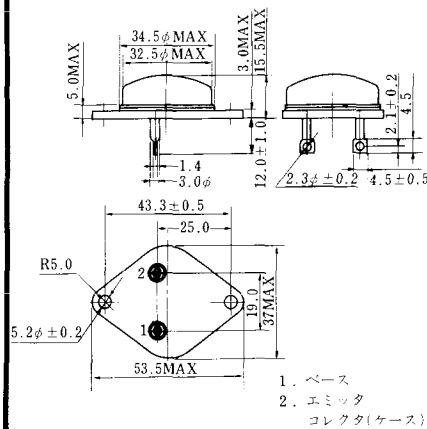

TS-3

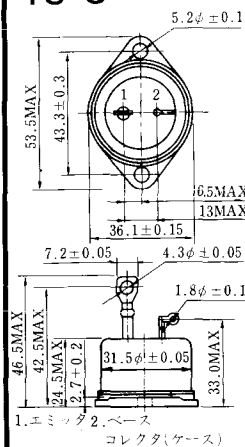


TS-4

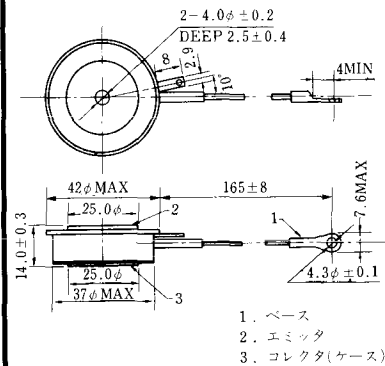


TS-5




TS-6


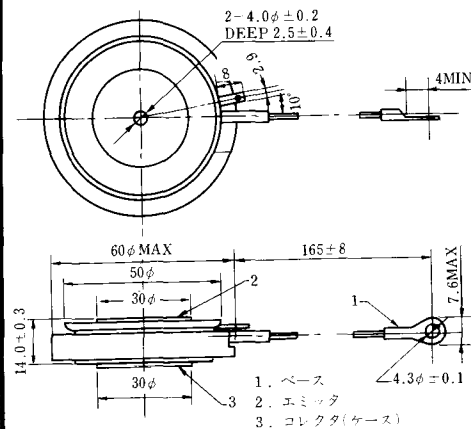


TS-7

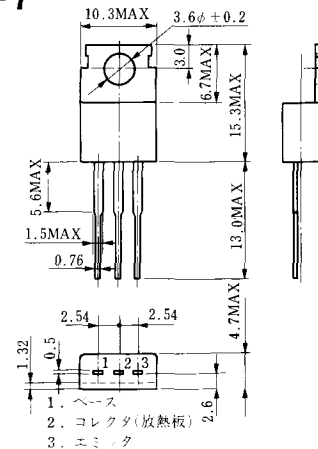


TS-8

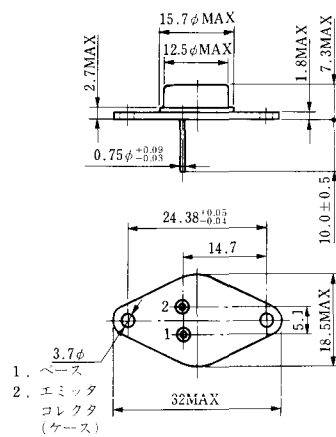





S-94B2A

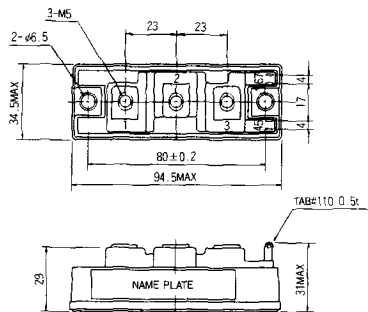


S-94D1A

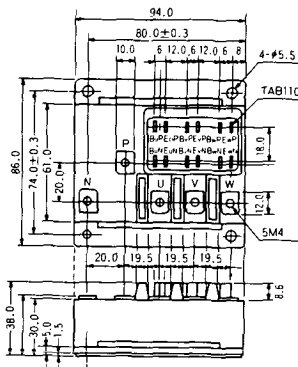


S-95A1A




S-95B1A

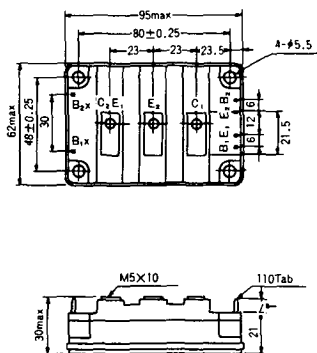

S-98B1B

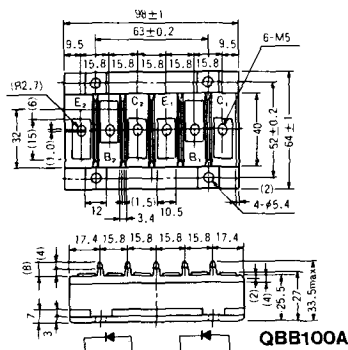

S-108A2A




S-108B1A



S-108B1B



S-108B1C

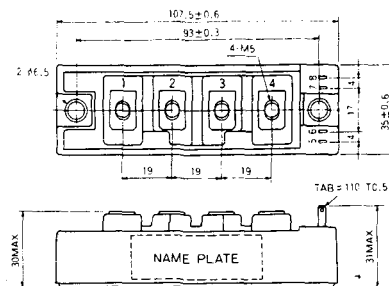

S-108B2A



S-108B2B



2-22B1A



2-27A4A




2-33C1A



2-33D1A



2-33F1A

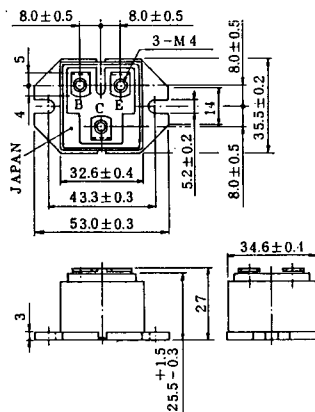

2-37A1A



2-48A3A



2-48A3B



2-48A4A




2-64A2A




2-64A2B




2-68A2A

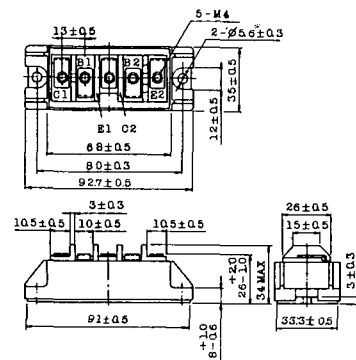


2-68B2A

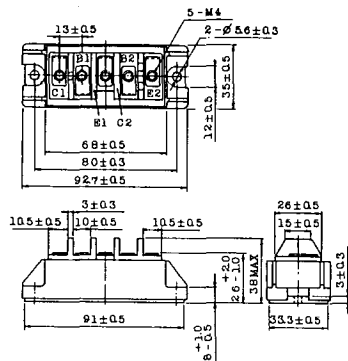


2-68C1A

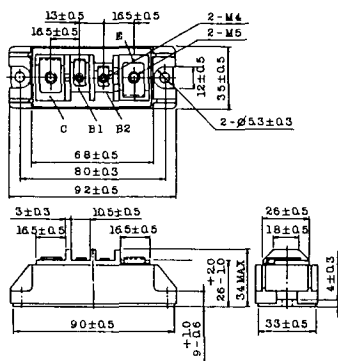


2-68D2A

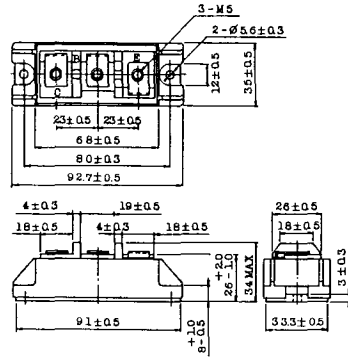


2-72A3A

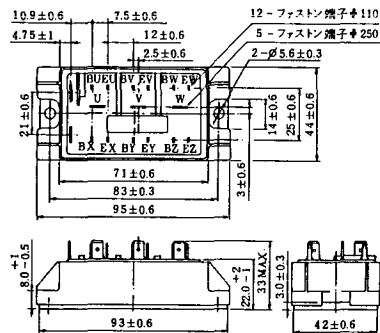


2-80A1A

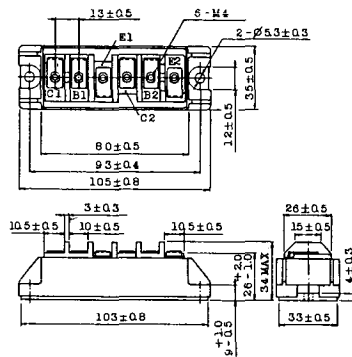


2-80B1A




2-80C1A

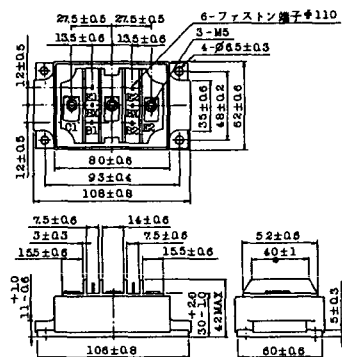


2-80D2A

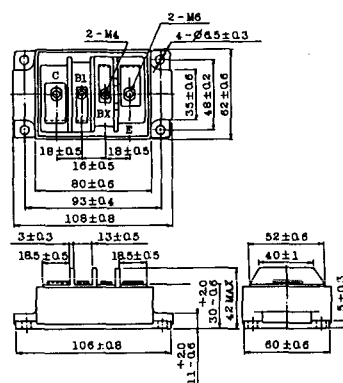


2-94A2A

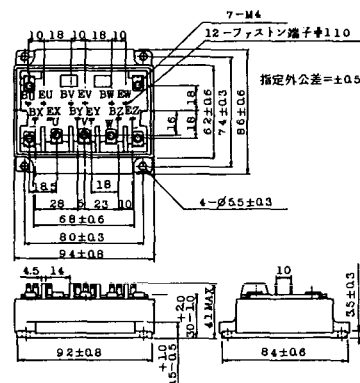


2-94B1A



2-94C2A




2-94C3A

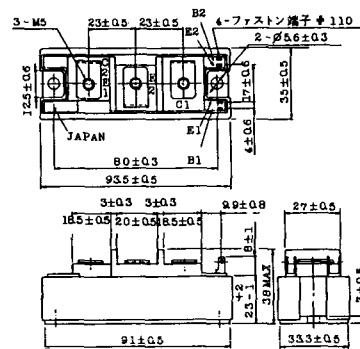


2-108B1A




2-109A3A

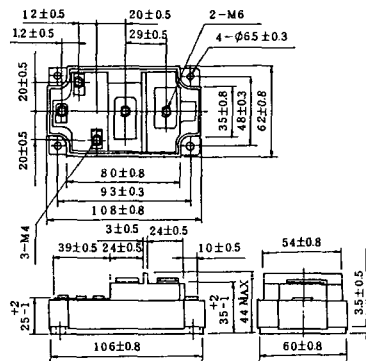


2-109A4A

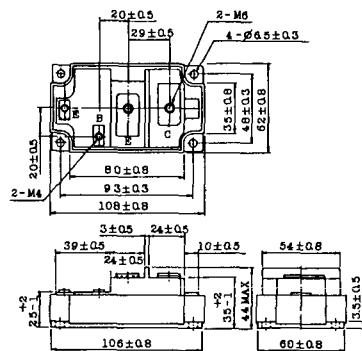

2-109B3A

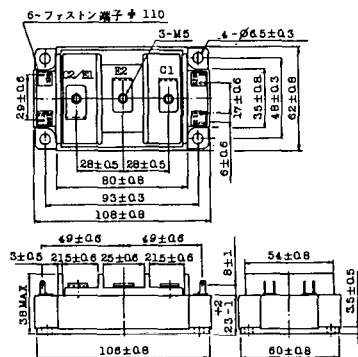

2-109B4A

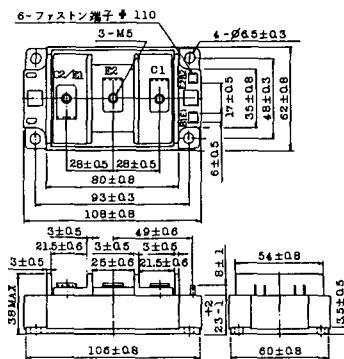

BBT-II

BBTII
1D200A-020



BBT-III

BBTIII
ETN31-055
ETN36-030
ETN36-030
ETN35-030



BBT-III

BBTIII
ETN01-055
ET1257




BBT-IV


BBTIV
1D500A-030




M-101




M-102




M-103




M-104

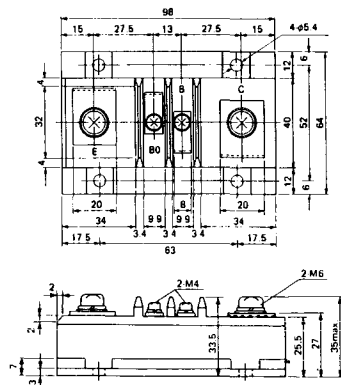

M-105



M-106

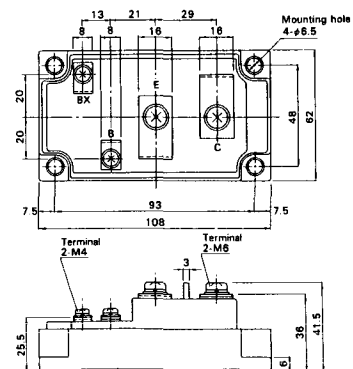

M-107




M-116



M-201




M-202

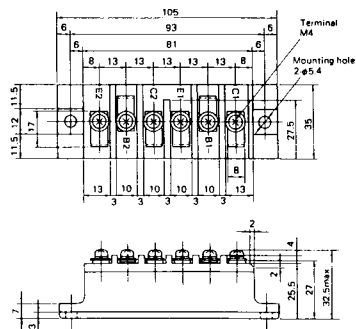


M-203




M-204

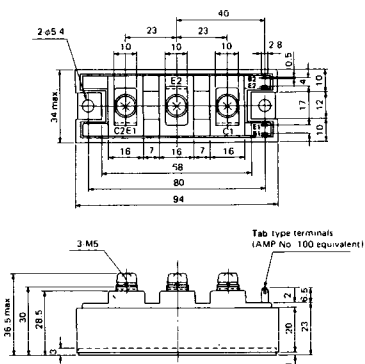

M-205

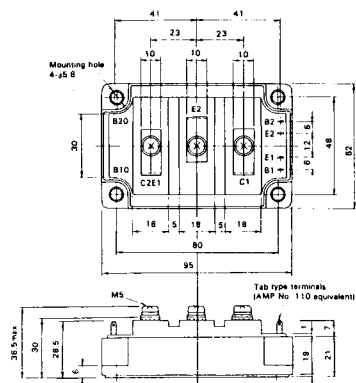


M-206

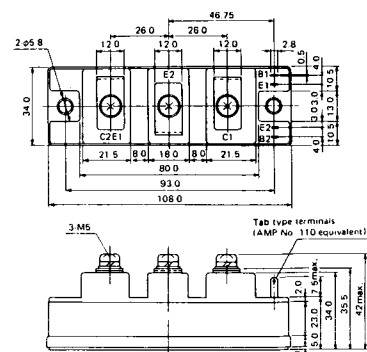


M-207



M-208

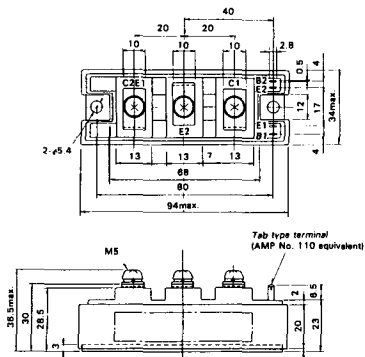

M-209

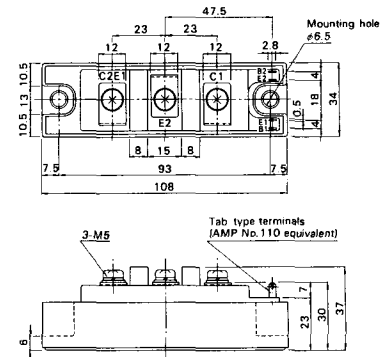


M-210









M-211



M-212





M-601



M-602



M-603



M-604




M-605




M-606



M-607



M-608




M-609




M-610




M-616




M-1A1A




M-2A1A




M-2B1A




M-2B2A



M-2C2A




M-2D4A

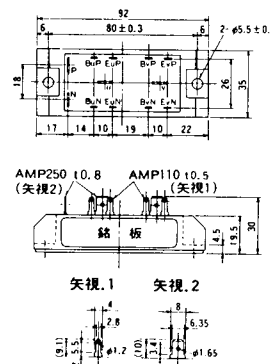

M-2E6A



M-2F6A



M-2G6A




M-3A1A




M-3B1A




M-3B1B

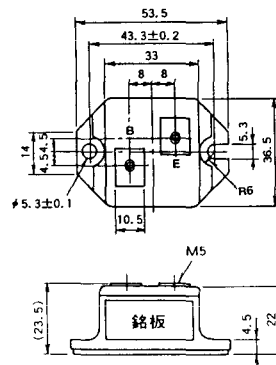


M-3C1A

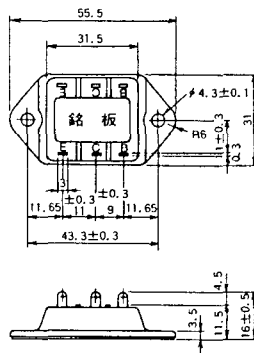

M-3D6A

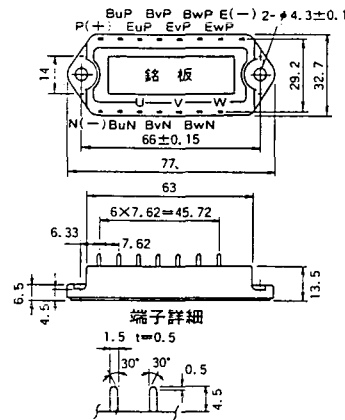


M-3E6A

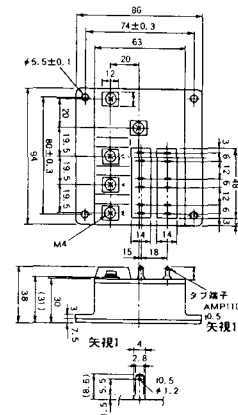


M-4A1A



M-4A2A



M-4A1B



M-4A2B



M-4B2A



M-5A1A



M-5A1B



M-5A2A



M-5B2A




M-5C2A




M-5D2A



M-6A1A

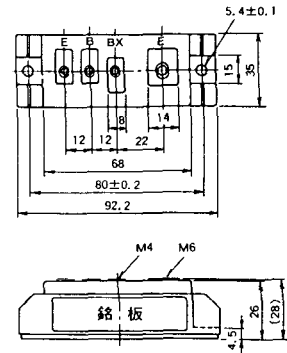

M-7A1A

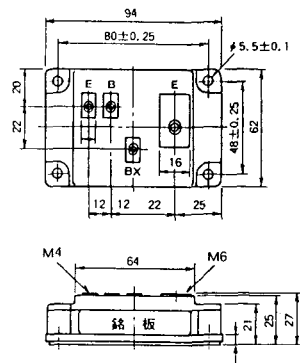

M-7B1A



M-8A1A



M-8A1B



M-8A2A




M-8A2B




M-8B2A



M-9A1A



M-9A2A




M-9B1A




M-9C2A




M-1A1B

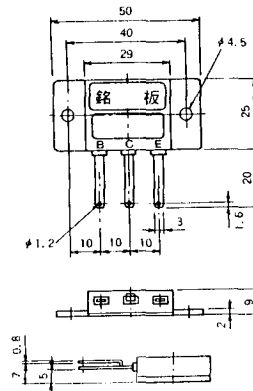


M-1A1C



M-2E6B

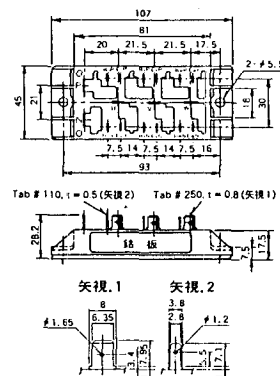


M-2E6C




M-10A2A



M-10A2B




M-11A2A

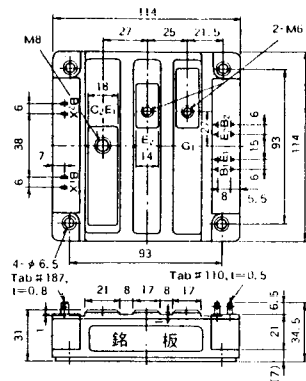


M-12A6A




M-12B6A




M-12B6B

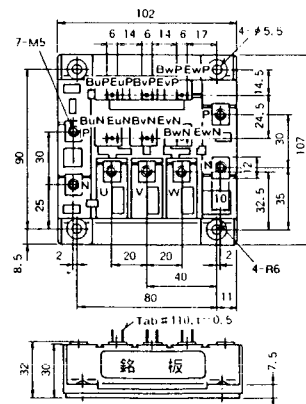

M-4A2D

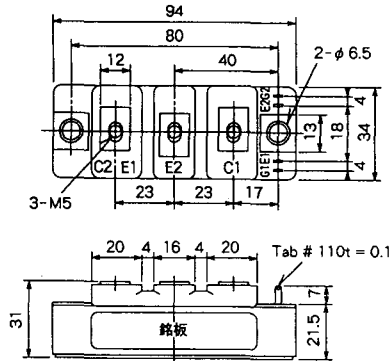


M-4A2E

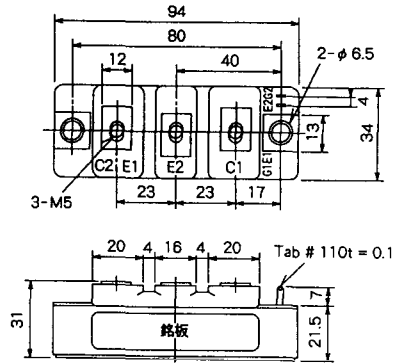


M-4C2A




M-4C2B

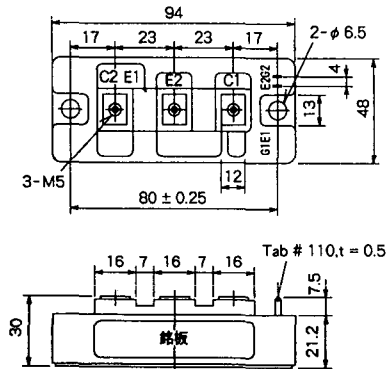

M-9B1C

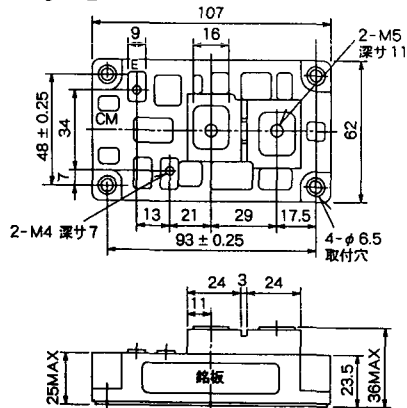

M-9D2A

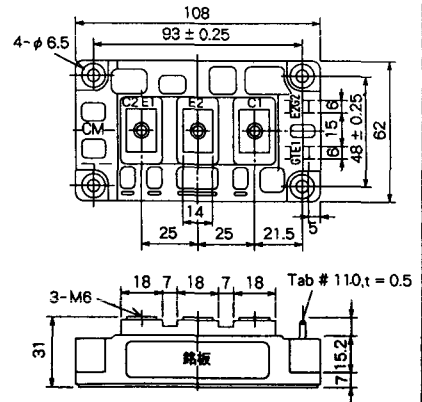

M-9D2B



M-10A2C



H-101



Weight :480g

TERMINALS



H-201





H-202




LF-J

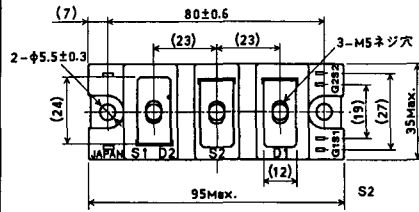


LF-K

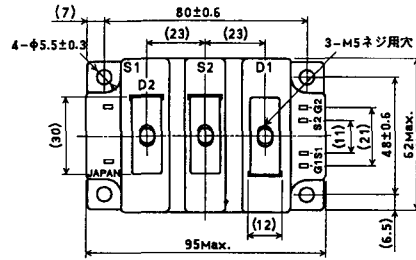


U-1

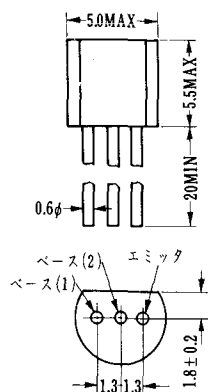


U-2

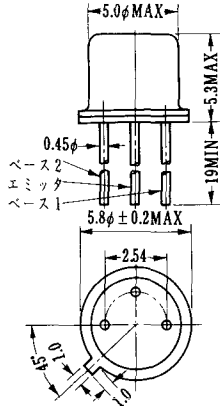


U-3

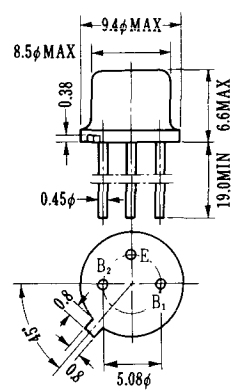

U-4

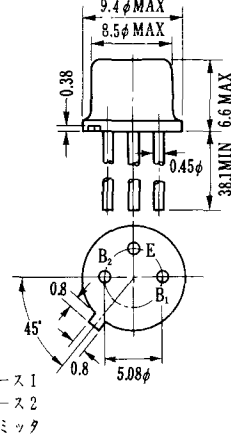


U-5

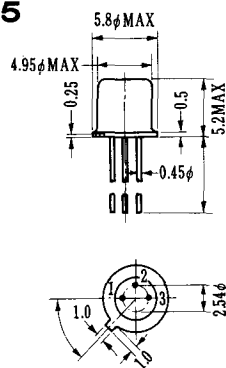


1. BASE 1
2. EMITTER
3. BASE 2 (CASE)

U-6

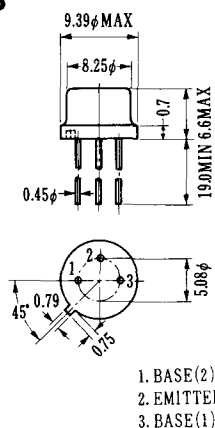

1. BASE (2)
2. EMITTER
3. BASE (1)

U-7

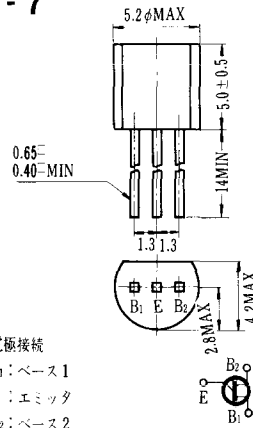

U-8

