


POW-R-BLOK™

Dual & Single Diode Isolated Module
160 Amperes / Up to 2200 Volts

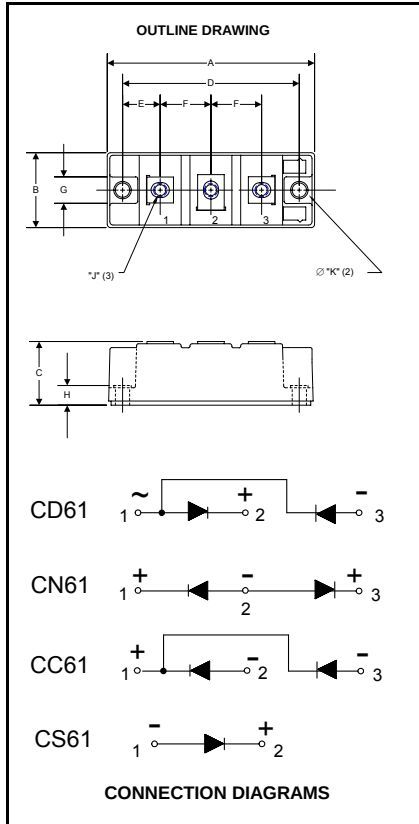

CD61__16B, CS61__16B
CN61__16B, CC61__16B
Dual & Single Diode Isolated
POW-R-BLOK™ Module
160 Amperes / Up to 2200 Volts

Description:

Powerex Dual Diode & Single Diode Modules are designed for use in applications requiring rectification and isolated packaging. The modules are isolated for easy mounting with other components on a common heatsink. POW-R-BLOK™ has been tested and recognized by the Underwriters Laboratories.

Features:

- Electrically Isolated Heatsinking
- DBC Alumina Insulator
- Glass Passivated Chips
- Metal Baseplate
- Low Thermal Impedance for Improved Current Capability
- UL Recognition Pending

Benefits:

- No Additional Insulation Components Required
- Easy Installation
- No Clamping Components Required
- Reduce Engineering Time

Ordering Information:

Select the complete nine digit module part number from the table below.
 Example: CD611616B is a 1600 Volt, 160 Ampere Dual Diode Isolated POW-R-BLOK™ Module

Type	Voltage Volts (x100)	Current Amperes (x 10)	Version
CD61	08	16	B
CC61	12		
CN61	14		
	16		
CS61	18		
	20		
	22		

Outline Dimensions

Dimension	Inches	Millimeters
A	3.70	94
B	1.34	34
C	1.18	30
D	3.15	80
E	0.67	17
F	0.91	23
G	0.51	13
H	0.33	8.3
J	M6	M6
K	0.25	6.4

Note: Dimensions are for reference only.

Applications:

- Power Supplies
- Bridge Circuits
- AC & DC Motor Drives
- Battery Supplies
- Large IGBT Circuit Front Ends
- Welders



CD61__16B, CS61__16B
CN61__16B, CC61__16B

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

POW-R-BLOK™
Dual & Single Diode Isolated Module
160 Amperes / Up to 2200 Volts

Absolute Maximum Ratings

Characteristics	Conditions	Symbol	Units
Repetitive Peak Reverse Blocking Voltage		V_{RRM}	up to 2200 V
Non-Repetitive Peak Reverse Blocking Voltage ($t < 5$ msec)		V_{RSM}	$V_{RRM} + 100$ V
RMS Forward Current	180° Conduction, $T_C=109^{\circ}\text{C}$	$I_{F(RMS)}$	250 A
Average Forward Current	180° Conduction, $T_C=109^{\circ}\text{C}$	$I_{F(AV)}$	160 A
Peak One Cycle Surge Current, Non-Repetitive	60 Hz, 100% V_{RRM} reapplied, $T_J=150^{\circ}\text{C}$	I_{FSM}	3,500 A
	60 Hz, 100% No V_{RRM} reapplied, $T_J=150^{\circ}\text{C}$	I_{FSM}	4,200 A
	50 Hz, 100% V_{RRM} reapplied, $T_J=150^{\circ}\text{C}$	I_{FSM}	3,350 A
	50 Hz, 100% No V_{RRM} reapplied, $T_J=150^{\circ}\text{C}$	I_{FSM}	4,000 A
I^2t for Fusing for One Cycle	8.3ms, 100% V_{RRM} reapplied, $T_J=150^{\circ}\text{C}$	I^2t	52,000 $\text{A}^2 \text{ sec}$
	8.3ms, 100% No V_{RRM} reapplied, $T_J=150^{\circ}\text{C}$	I^2t	73,000 $\text{A}^2 \text{ sec}$
	10ms, 100% V_{RRM} reapplied, $T_J=150^{\circ}\text{C}$	I^2t	56,000 $\text{A}^2 \text{ sec}$
	10ms, 100% No V_{RRM} reapplied, $T_J=150^{\circ}\text{C}$	I^2t	80,000 $\text{A}^2 \text{ sec}$
Operating Temperature		T_J	-40 to +150 $^{\circ}\text{C}$
Storage Temperature		T_{stg}	-40 to +150 $^{\circ}\text{C}$
Max. Mounting Torque, M6 Mounting Screw			35 - 50 in.-Lb.
			4 - 6 Nm
Max. Mounting Torque, M8 Terminal Screw			35 - 50 in.-Lb.
			4 - 6 Nm
Module Weight, Typical			165 g
			0.36 lb.
V Isolation @ 25C, V_{rms} for 1 sec		V_{rms}	3000 V



CD61__16B, CS61__16B
CN61__16B, CC61__16B

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

POW-R-BLOK™
Dual & Single Diode Isolated Module
160 Amperes / Up to 2200 Volts

Electrical Characteristics, $T_J=25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Max.	Units
Repetitive Peak Reverse Leakage Current	I_{RRM}	Up to 2200V, $T_J=150^\circ\text{C}$		20	mA
Peak On-State Voltage	V_{FM}	$I_{FM}=520\text{A}$, 180 Deg Conduction		1.43	V
Threshold Voltage, Low-level	$V_{(TO)1}$	$T_J = 150^\circ\text{C}$, $I = 16.7\% I_{F(AV)}$ to $I_{F(AV)}$		0.85	V
Slope Resistance, Low-level	r_{T1}			1.2	$\text{m}\Omega$

Thermal Characteristics

Characteristics	Symbol		Max.	Units
Thermal Resistance, Junction to Case	$R_{\theta J-C}$	Per Module, both conducting	0.09	$^\circ\text{C/W}$
		Per Junction both conducting	0.18	$^\circ\text{C/W}$
Thermal Resistance, Case to Sink Lubricated	$R_{\theta C-S}$	Per Module	0.05	$^\circ\text{C/W}$




CD61_16B, CS61_16B
CN61_16B, CC61_16B


Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

POW-R-BLOK™
Dual & Single Diode Isolated Module
160 Amperes / Up to 2200 Volts


Maximum On-State Forward Voltage Drop
($T_j = 150^\circ\text{C}$)

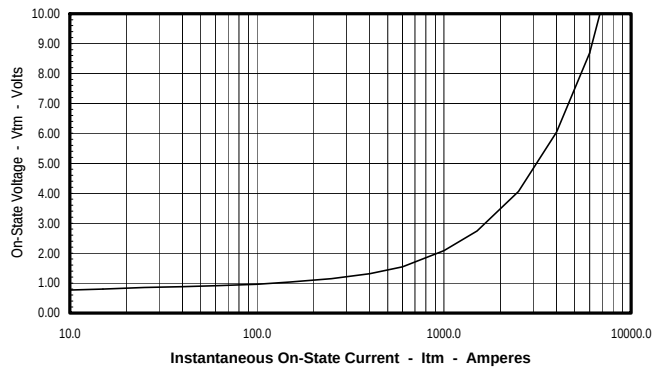


Maximum Transient Thermal Impedance
(Junction to Case)

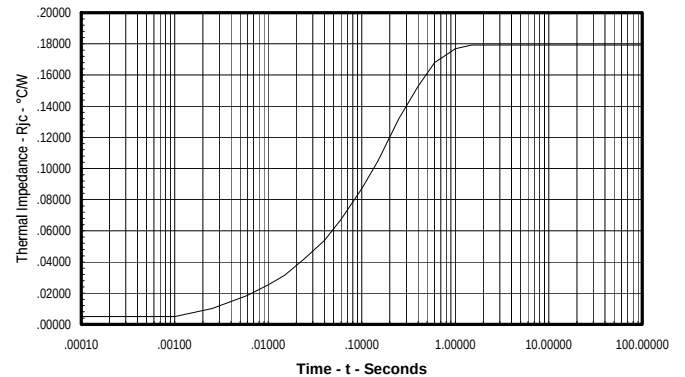


Maximum On-State Power Dissipation
(Sinusoidal Waveform)

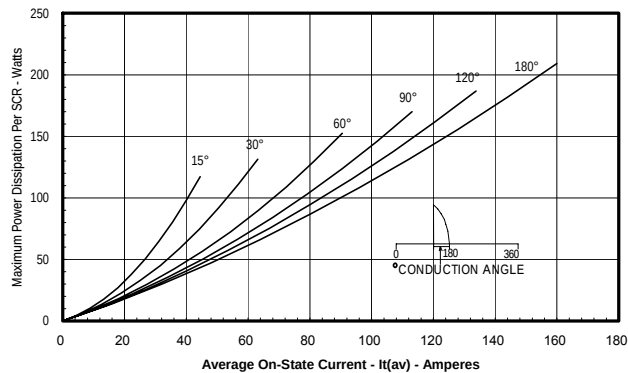

Maximum Allowable Case Temperature
(Sinusoidal Waveform)

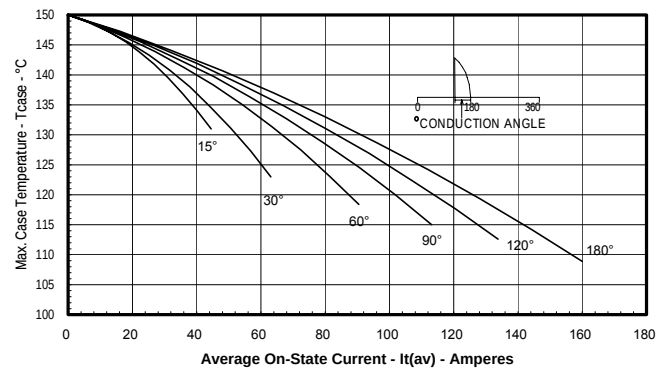

Maximum On-State Power Dissipation
(Rectangular Waveform)

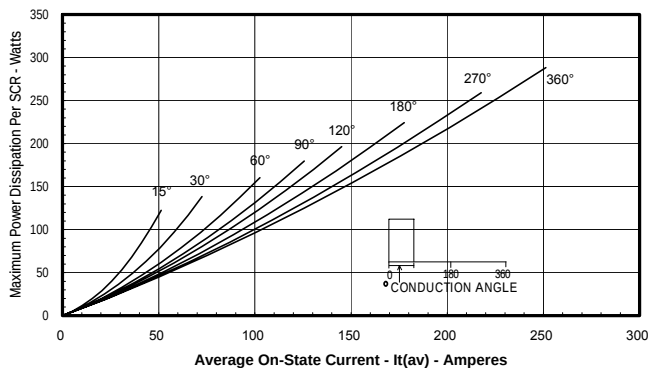

Maximum Allowable Case Temperature
(Rectangular Waveform)

