

MITSUBISHI IGBT MODULES
CM400DU-12NFH

HIGH POWER SWITCHING USE

CM400DU-12NFH




- IC 400A
- VCES 600V
- Insulated Type
- 2-elements in a pack

APPLICATION

High frequency switching use (30kHz to 60kHz).
 Gradient amplifier, Induction heating, power supply, etc.

OUTLINE DRAWING & CIRCUIT DIAGRAM

Dimensions in mm

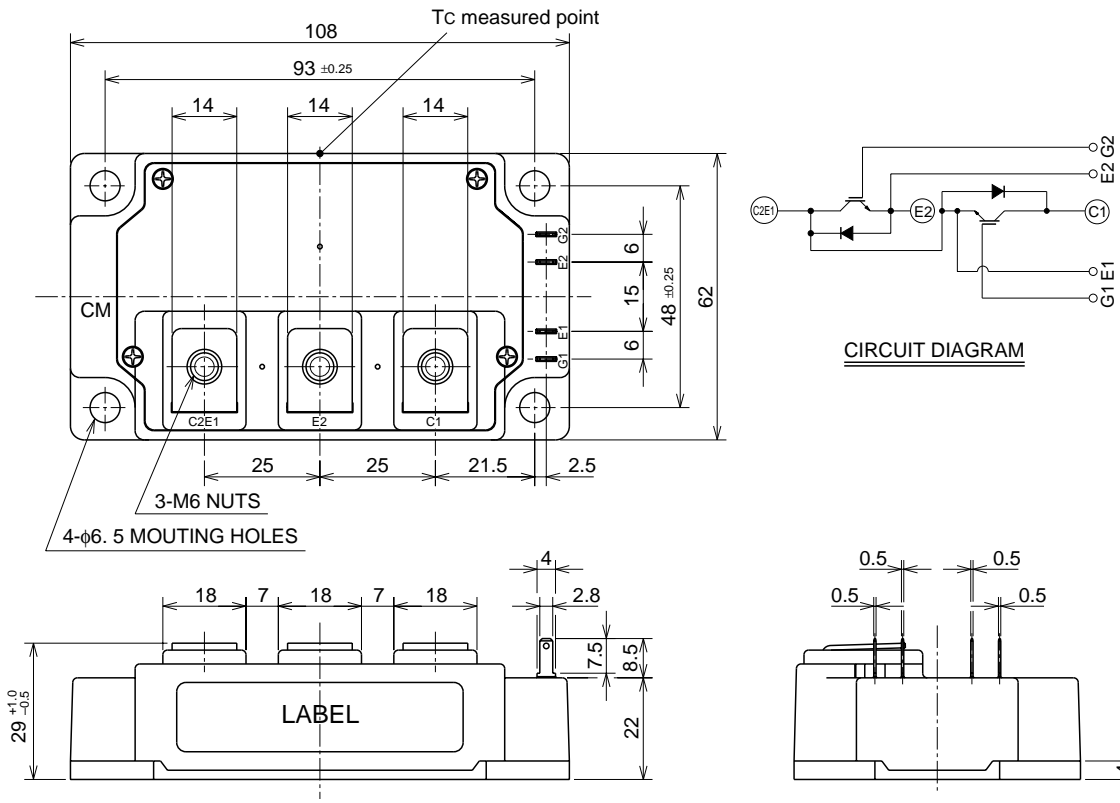

CM400DU-12NFH

HIGH POWER SWITCHING USE

MAXIMUM RATINGS (Tj = 25°C)

| Symbol | Parameter | Conditions | Ratings | Unit |
|---------------------------|-------------------------------|--|------------|-------|
| V _{CE} S | Collector-emitter voltage | G-E Short | 600 | V |
| V _{GE} S | Gate-emitter voltage | C-E Short | ±20 | V |
| I _C | Collector current | Operation | 400 | A |
| I _{CM} | | Pulse (Note 2) | 800 | A |
| I _E (Note 1) | Emitter current | Operation | 400 | A |
| I _{EM} (Note 1) | | Pulse (Note 2) | 800 | A |
| P _C (Note 3) | Maximum collector dissipation | T _C = 25°C | 960 | W |
| P _C ' (Note 3) | Maximum collector dissipation | T _C ' = 25°C ⁴ | 1640 | W |
| T _j | Junction temperature | | -40 ~ +150 | °C |
| T _{stg} | Storage temperature | | -40 ~ +125 | °C |
| V _{iso} | Isolation voltage | Main Terminal to base plate, AC 1 min. | 2500 | V |
| — | Mounting torque | Main Terminal M6 | 3.5 ~ 4.5 | N • m |
| — | | Mounting holes M6 | 3.5 ~ 4.5 | N • m |
| — | Weight | Typical value | 400 | g |

ELECTRICAL CHARACTERISTICS (Tj = 25°C)

| Symbol | Parameter | Test conditions | Limits | | | Unit |
|--------------------------|---|---|-----------------------|------|--------------------|------|
| | | | Min. | Typ. | Max. | |
| I _{CES} | Collector cutoff current | V _{CE} = V _{CE} S, V _{GE} = 0V | — | — | 1 | mA |
| V _{GE(th)} | Gate-emitter threshold voltage | I _C = 40mA, V _{CE} = 10V | 5 | 6 | 7 | V |
| I _{GES} | Gate leakage current | V _{GE} = V _{GES} , V _{CE} = 0V | — | — | 0.5 | μA |
| V _{CE(sat)} | Collector-emitter saturation voltage (Note 4) | T _j = 25°C | — | 2.0 | 2.7 | V |
| | | T _j = 125°C | — | 1.95 | — | |
| C _{ies} | Input capacitance | V _{CE} = 10V V _{GE} = 0V | — | — | 110 | nF |
| C _{oes} | Output capacitance | | — | — | 7.2 | nF |
| C _{res} | Reverse transfer capacitance | | — | — | 4.0 | nF |
| Q _G | Total gate charge | V _{CC} = 300V, I _C = 400A, V _{GE} = 15V | — | 2480 | — | nC |
| t _{d(on)} | Turn-on delay time | V _{CC} = 300V, I _C = 400A V _{GE1} = V _{GE2} = 15V R _G = 3.1Ω, Inductive load switching operation | — | — | 400 | ns |
| t _r | Turn-on rise time | | — | — | 200 | ns |
| t _{d(off)} | Turn-off delay time | | — | — | 700 | ns |
| t _f | Turn-off fall time | | — | — | 150 | ns |
| t _{rr} (Note 1) | Reverse recovery time | | I _E = 400A | — | — | 200 |
| Q _{rr} (Note 1) | Reverse recovery charge | | — | 7.7 | — | μC |
| V _{EC} (Note 1) | Emitter-collector voltage | I _E = 400A, V _{GE} = 0V | — | — | 2.6 | V |
| R _{th(j-c)Q} | Thermal resistance*1 | IGBT part (1/2 module) | — | — | 0.13 | °C/W |
| R _{th(j-c)R} | | FWDi part (1/2 module) | — | — | 0.18 | °C/W |
| R _{th(c-f)} | Contact thermal resistance | Case to fin, Thermal compound Applied*2 (1/2 module) | — | 0.04 | — | °C/W |
| R _{th(j-c)Q} | Thermal resistance | T _c measured point is just under the chips (1/2 module) | — | — | 0.076 ³ | °C/W |
| R _G | External gate resistance | | 1.6 | — | 16 | Ω |

*1 : T_c measured point is shown in page OUTLINE DRAWING.

*2 : Typical value is measured by using Shin-etsu Silicone "G-746".

*3 : If you use this value, R_{th(f-a)} should be measured just under the chips.

*4 : T_c' measured point is just under the chips.

Note 1. I_E, V_{EC}, t_{rr} & Q_{rr} represent characteristics of the anti-parallel, emitter to collector free-wheel diode (FWDi).

2. Pulse width and repetition rate should be such that the device junction temp. (T_j) does not exceed T_{jmax} rating.

3. Junction temperature (T_j) should not increase beyond 150°C.


4. No short circuit capability is designed.

CM400DU-12NFH


HIGH POWER SWITCHING USE

PERFORMANCE CURVES


OUTPUT CHARACTERISTICS (TYPICAL)

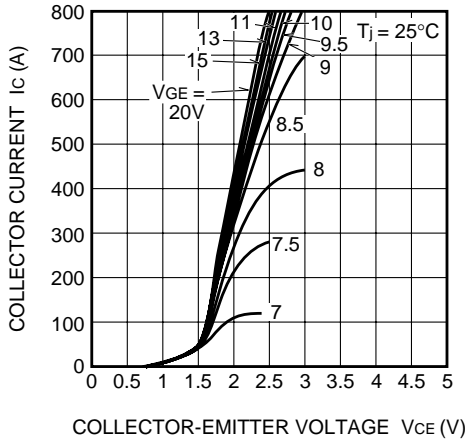


COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

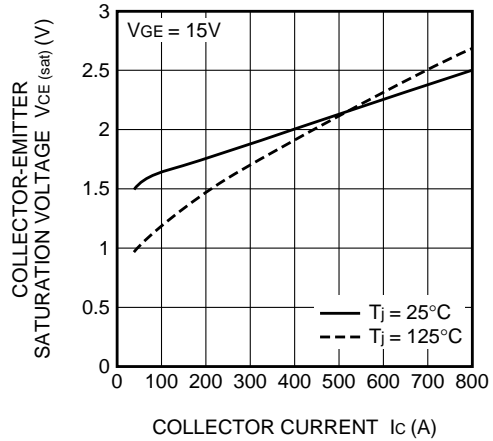


COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

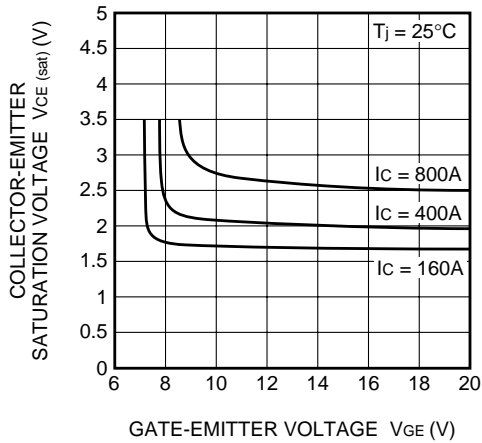


FREE-WHEEL DIODE FORWARD CHARACTERISTICS (TYPICAL)

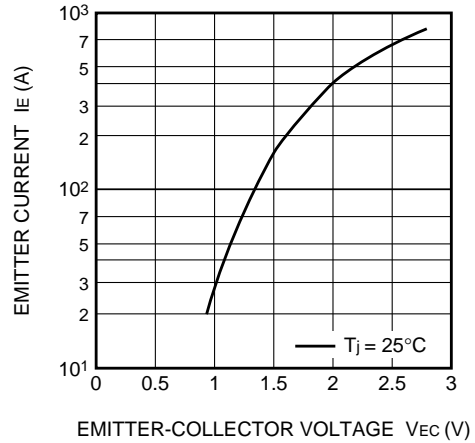

CAPACITANCE- V_{CE} CHARACTERISTICS (TYPICAL)

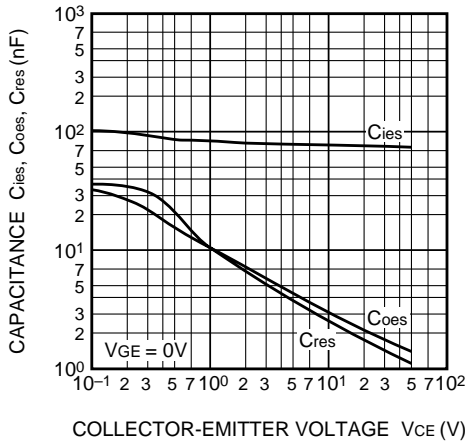


HALF-BRIDGE SWITCHING CHARACTERISTICS (TYPICAL)

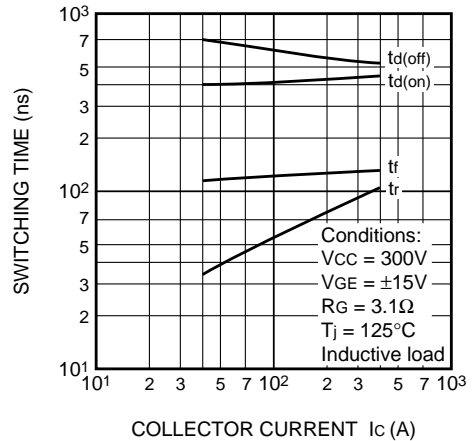


CM400DU-12NFH

HIGH POWER SWITCHING USE


REVERSE RECOVERY CHARACTERISTICS OF FREE-WHEEL DIODE (TYPICAL)

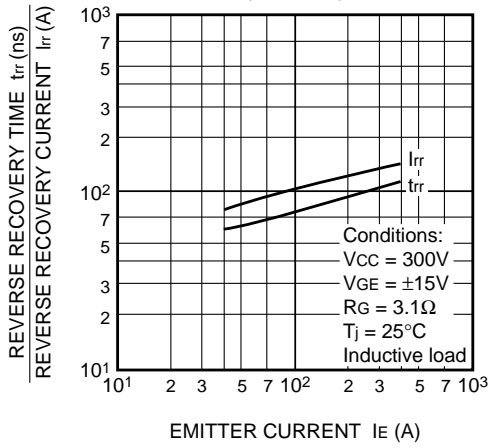

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (IGBT part)

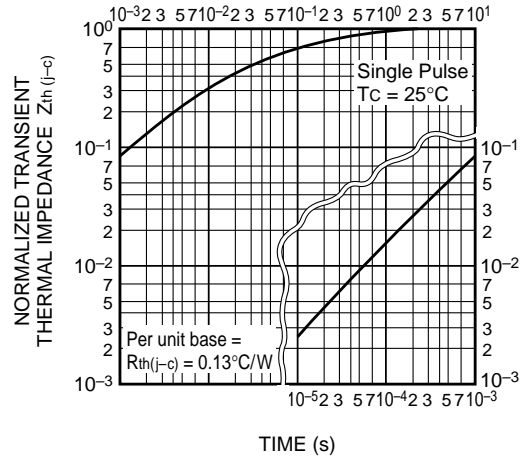

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (FWDi part)

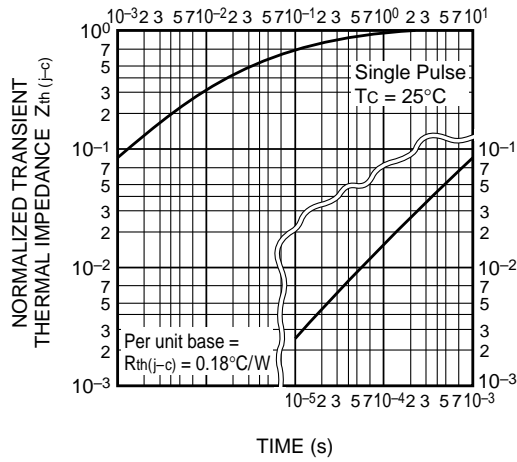

GATE CHARGE CHARACTERISTICS (TYPICAL)

