

GTR Module

Unit in mm

Silicon N Channel IGBT

High Power Switching Applications


Motor Control Applications

Features

- High input impedance
- High speed: $t_f = 1.0\mu s$ (Max.) $t_{rr} = 0.5\mu s$ (Max.)
- Low saturation voltage: $V_{CE(sat)} = 2.7V$ (Max.)
- Enhancement mode
- The electrodes are isolated from case


Maximum Ratings ($T_a = 25^\circ C$)

CHARACTERISTICS	SYMBOL	RATING	UNIT
Collector-Emitter Voltage	V_{CES}	1200	V
Gate-Emitter Voltage	V_{GES}	± 20	V
Collector Current	DC	I_C	200
	1ms	I_{CP}	400
Forward Current	DC	I_F	200
	1ms	I_{FM}	400
Collector Power Dissipation ($T_c = 25^\circ C$)	P_C	1400	W
Junction Temperature	T_j	150	$^\circ C$
Storage Temperature Range	T_{stg}	-40 ~ 125	$^\circ C$
Isolation Voltage	V_{isol}	2500 (AC 1 Minute)	V
Screw Torque (Terminal/Mounting)	—	3/3	N \cdot m

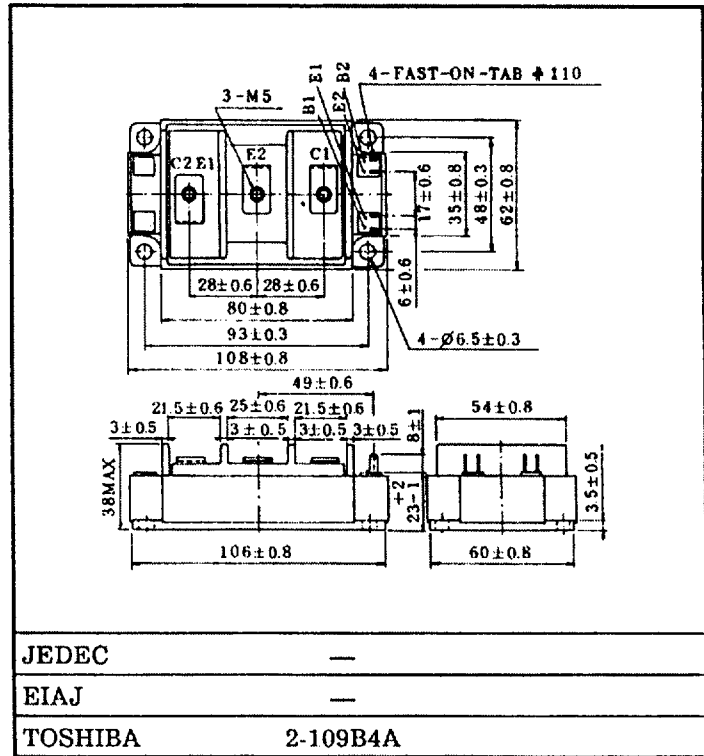

Weight : 445g

Equivalent Circuit

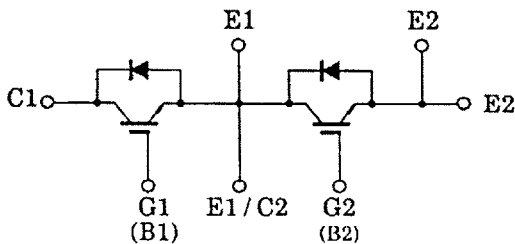







9097250 0022094 692

Electrical Characteristics (Ta = 25°C)







CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gate Leakage Current		I_{GES}	$V_{GE} = \pm 20V, V_{CE} = 0$	—	—	± 500	nA
Collector Cut-off Current		I_{CES}	$V_{CE} = 1200V, V_{GE} = 0$	—	—	2	mA
Gate-Emitter Cut-off Voltage		$V_{GE(OFF)}$	$I_C = 200mA, V_{CE} = 5V$	3.0	—	6.0	V
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C = 200A, V_{GE} = 15V$	—	2.3	2.7	V
Input Capacitance		C_{ies}	$V_{CE} = 10V, V_{GE} = 0, f = 1MHz$	—	31000	—	pF
Switching Time	Rise Time	t_r		—	0.3	0.6	μs
	Turn-on Time	t_{on}		—	0.4	0.8	
	Fall Time	t_f		—	0.6	1.0	
	Turn-off Time	t_{off}		—	1.2	1.0	
Forward Voltage		V_F	$I_F = 200A, V_{GE} = 0$	—	2.0	3.0	V
Reverse Recovery Time		t_{rr}	$I_F = 200A, V_{GE} = -10V$ $di/dt = 300A/\mu s$	—	0.25	0.5	μs
Thermal Resistance		$R_{th(j-c)}$	Transistor	—	—	0.089	°C/W
			Diode	—	—	0.25	

Note 1: Do not apply the over rating voltage.



9097250 0022095 529

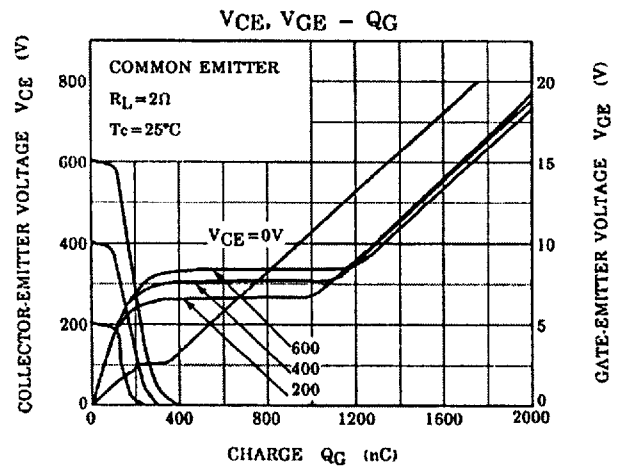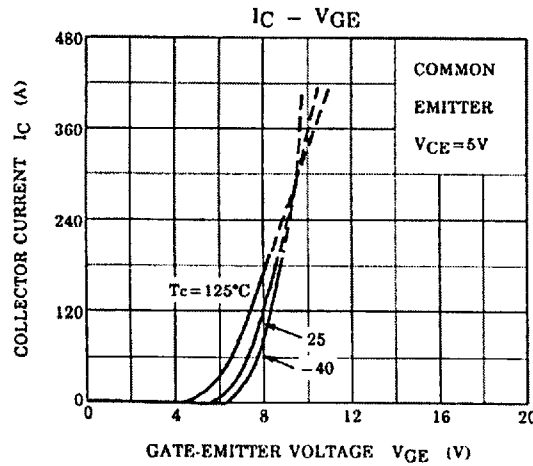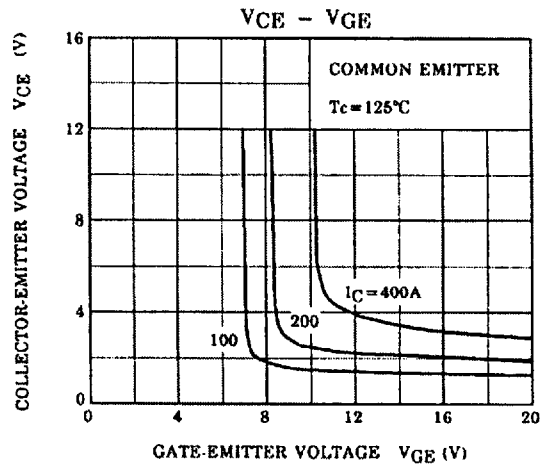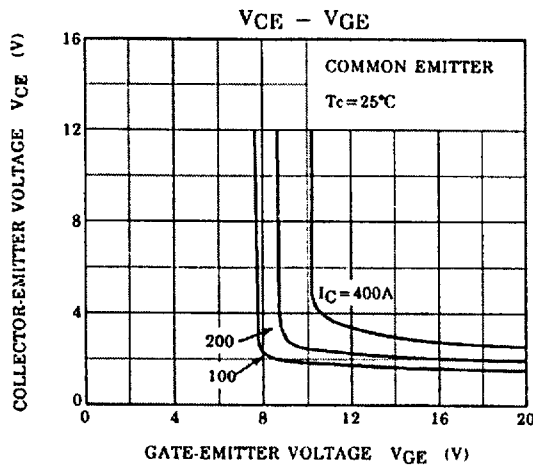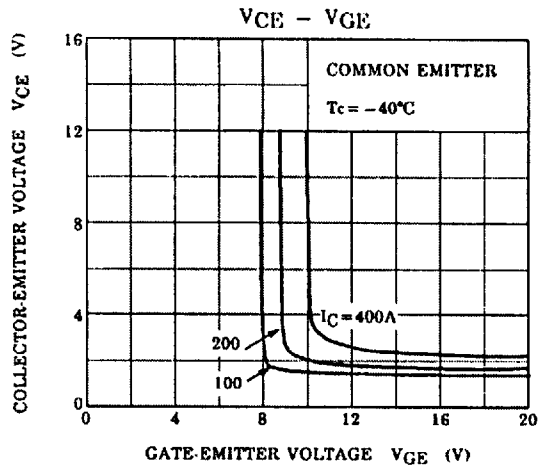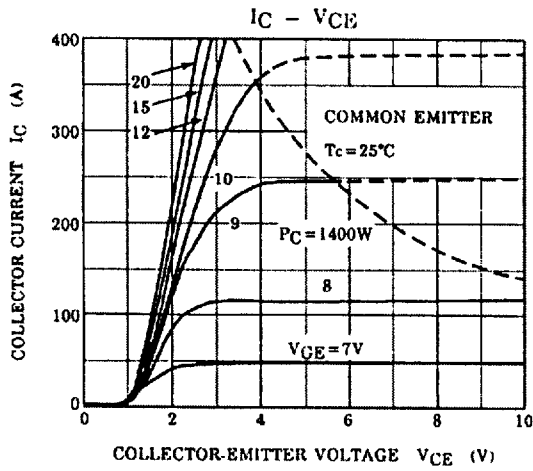

9097250 0022096 465

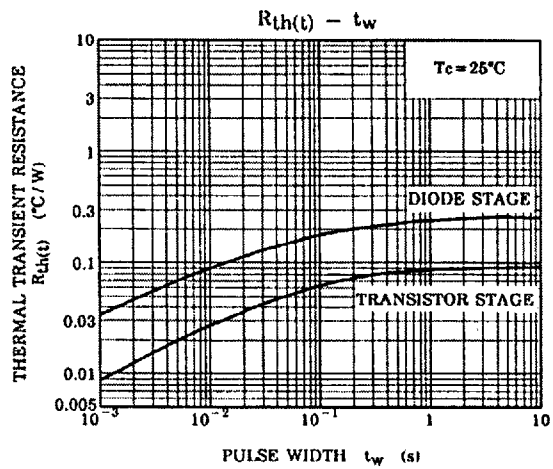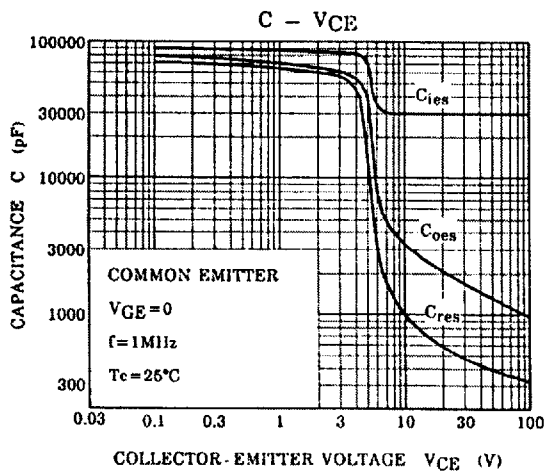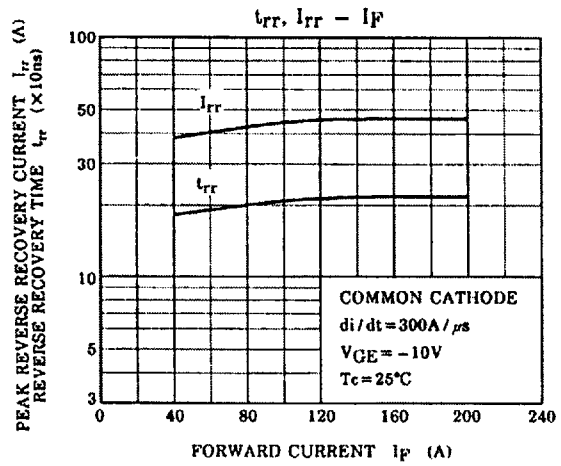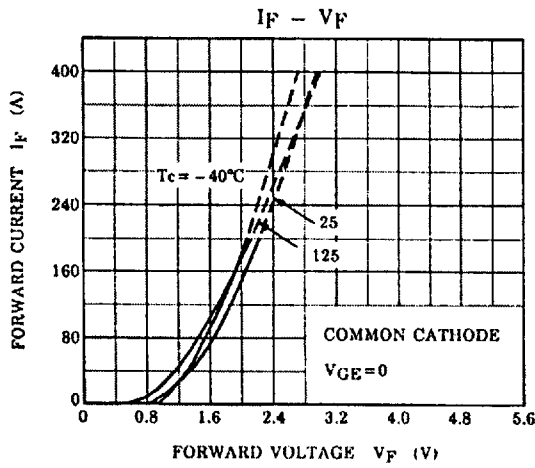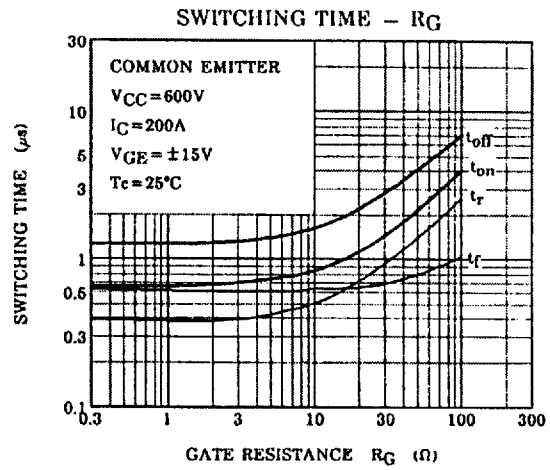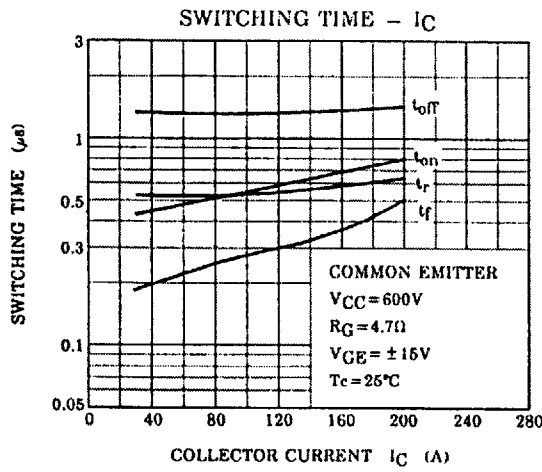

9097250 0022097 3T1

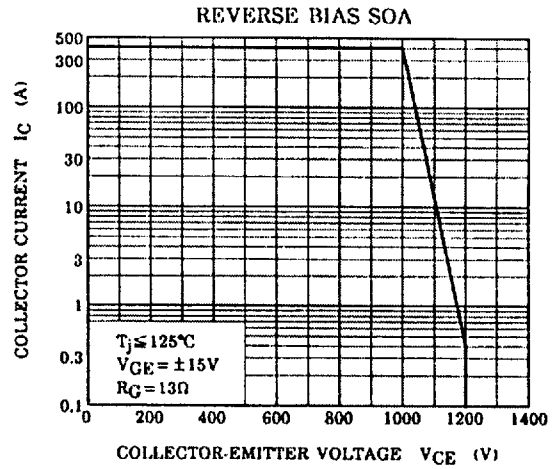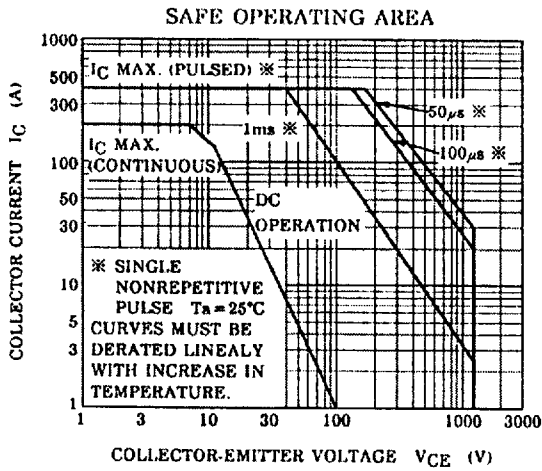

The information contained here is subject to change without notice.
 The information contained herein is presented only as guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others. These TOSHIBA products are intended for usage in general electronic equipments (office equipment, communication equipment, measuring equipment, domestic electrification, etc.) Please make sure that you consult with us before you use these TOSHIBA products in equipments which require high quality and/or reliability, and in equipments which could have major impact to the welfare of human life (atomic energy control, spaceship, traffic signal, combustion control, all types of safety devices, etc.). TOSHIBA cannot accept liability to any damage which may occur in case these TOSHIBA products were used in the mentioned equipments without prior consultation with TOSHIBA.

9097250 0022098 238