SEMIKRON

SEMITRANS® M
Low Loss IGBT Modules

SKM 100 GB 124 D



SEMITRANS 2



GB

Absolute Maximum Ratings		Values	
Symbol	**Conditions** [1]		**Units**
V_{CES}		1200	V
V_{CGR}	R_{GE} = 20 kΩ	1200	V
I_C	T_{case} = 25/85 °C	150 / 100	A
I_{CM}	T_{case} = 25/85 °C; t_p = 1 ms	300 / 200	A
V_{GES}		± 20	V
P_{tot}	per IGBT, T_{case} = 25 °C	700	W
T_j, (T_{stg})		–40 ... + 150 (125)	°C
V_{isol}	AC, 1 min.	2 500	V
humidity	DIN 40040	Class F	
climate	DIN IEC 68 T.1	40/125/56	
Inverse Diode			
$I_F = -I_C$	T_{case} = 25/80 °C	95 / 65	A
$I_{FM} = -I_{CM}$	T_{case} = 25/80 °C; t_p = 1 ms	300 / 200	A
I_{FSM}	t_p = 10 ms; sin.; T_j = 150 °C	720	A
I^2t	t_p = 10 ms; T_j = 150 °C	2600	A^2s

Characteristics					
Symbol	**Conditions** [1]	**min.**	**typ.**	**max.**	**Units**
$V_{(BR)CES}$	V_{GE} = 0, I_C = 4 mA	≥ V_{CES}	–	–	V
$V_{GE(th)}$	V_{GE} = V_{CE}, I_C = 2 mA	4,5	5,5	6,5	V
I_{CES}	V_{GE} = 0, T_j = 25 °C	–	0,1	1,5	mA
	V_{CE} = V_{CES}, T_j = 125 °C	–	6	–	mA
I_{GES}	V_{GE} = 20 V, V_{CE} = 0	–	–	300	nA
V_{CEsat}	I_C = 75 A; V_{GE} = 15 V; T_j = 25 (125) °C	–	2,1(2,4)	2,45(2,85)	V
V_{CEsat}	I_C = 100 A; V_{GE} = 15 V; T_j = 25 (125) °C	–	2,5(3,0)	–	V
g_{fs}	V_{CE} = 20 V, I_C = 75 A	31	–	–	S
C_{CHC}	per IGBT	–	–	350	pF
C_{ies}	V_{GE} = 0, V_{CE} = 25 V, f = 1 MHz	–	5	6,6	nF
C_{oes}		–	720	900	pF
C_{res}		–	380	500	pF
L_{CE}		–	–	30	nH
$t_{d(on)}$	V_{CC} = 600 V	–	80	–	ns
t_r	V_{GE} = –15 V / +15 V [3]	–	45	–	ns
$t_{d(off)}$	I_C = 75 A, ind. load	–	430	–	ns
t_f	R_{Gon} = R_{Goff} = 10 Ω	–	55	–	ns
E_{on} [5]	T_j = 125 °C	–	11	–	mWs
E_{off} [5]		–	9	–	mWs
Inverse Diode [8]					
$V_F = V_{EC}$	I_F = 75 A; V_{GE} = 0 V; T_j = 25 (125) °C	–	2,0(1,8)	2,5	V
$V_F = V_{EC}$	I_F = 100 A; V_{GE} = 0 V; T_j = 25 (125) °C	–	2,25(2,05)	–	V
V_{TO}	T_j = 125 °C	–	1,1	1,2	V
r_t	T_j = 125 °C	–	–	15	mΩ
I_{RRM}	I_F = 75 A; T_j = 125 °C [2]	–	42	–	A
Q_{rr}	I_F = 75 A; T_j = 125 °C [2]	–	9,1	–	µC
Thermal characteristics					
R_{thjc}	per IGBT	–	–	0,18	°C/W
R_{thjc}	per diode	–	–	0,50	°C/W
R_{thch}	per module	–	–	0,05	°C/W

Features

- MOS input (voltage controlled)
- N channel, homogeneous Silicon structure (NPT- Non punch-through IGBT)
- Low loss high density chip
- Low tail current
- High short circuit capability, self limiting to 6 * I_{cnom}
- Latch-up free
- Fast & soft inverse CAL diodes [8]
- Isolated copper baseplate using DCB Direct Copper Bonding Technology without hard mould
- Large clearance (10 mm) and creepage distances (20 mm)

Typical Applications:

→ **B 6 – 121**

- Switching (not for linear use)

[1] T_{case} = 25 °C, unless otherwise specified
[2] $I_F = -I_C$, V_R = 600 V, $-di_F/dt$ = 800 A/µs, V_{GE} = 0 V
[3] Use V_{GEoff} = –5... –15 V
[5] See fig. 2 + 3; R_{Goff} = 10 Ω
[8] CAL = Controlled Axial Lifetime Technology

Cases and mech. data
→ **B 6 – 122**

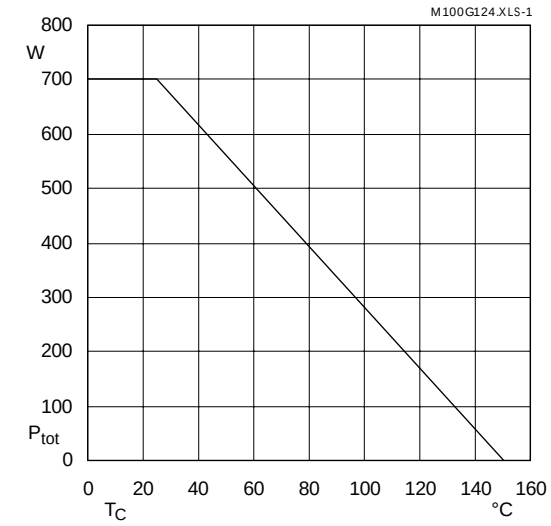

Fig. 1 Rated power dissipation $P_{tot} = f(T_C)$

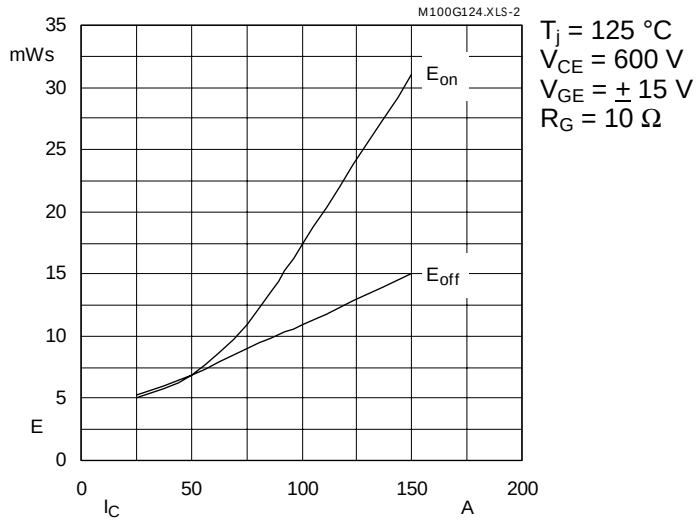

Fig. 2 Turn-on /-off energy = f (I_C)

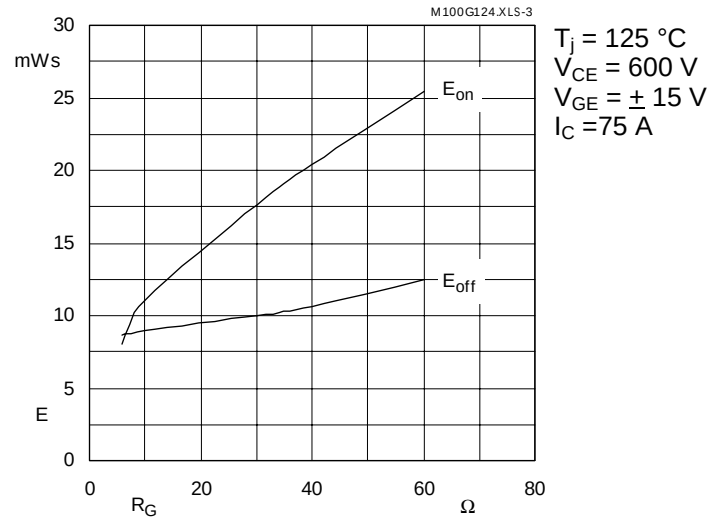

Fig. 3 Turn-on /-off energy = f (R_G)

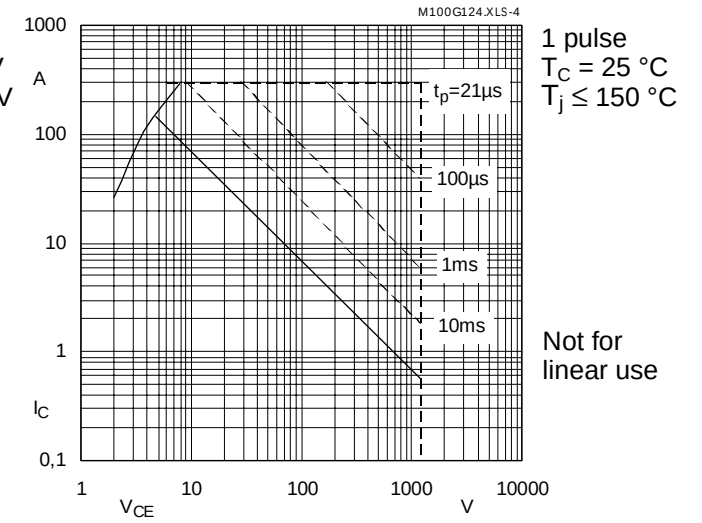

Fig. 4 Maximum safe operating area (SOA) $I_C = f(V_{CE})$

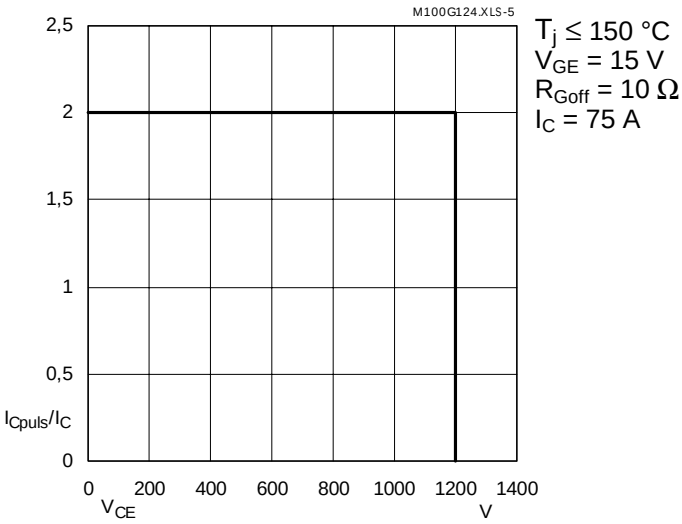

Fig. 5 Turn-off safe operating area (RBSOA)

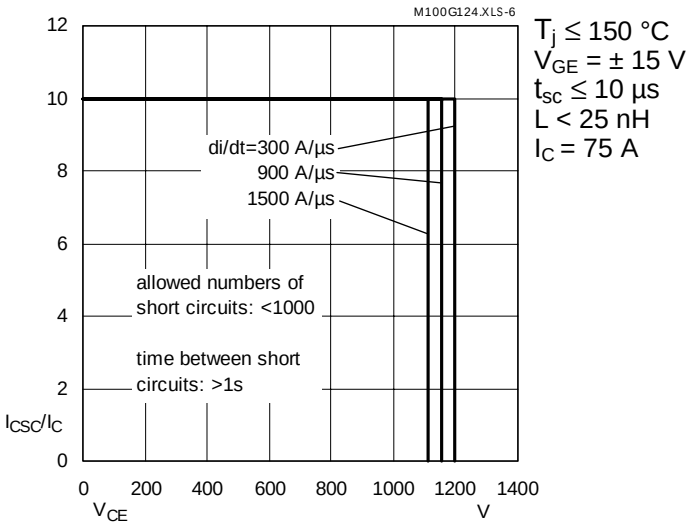

Fig. 6 Safe operating area at short circuit $I_C = f(V_{CE})$

 © by SEMIKRON

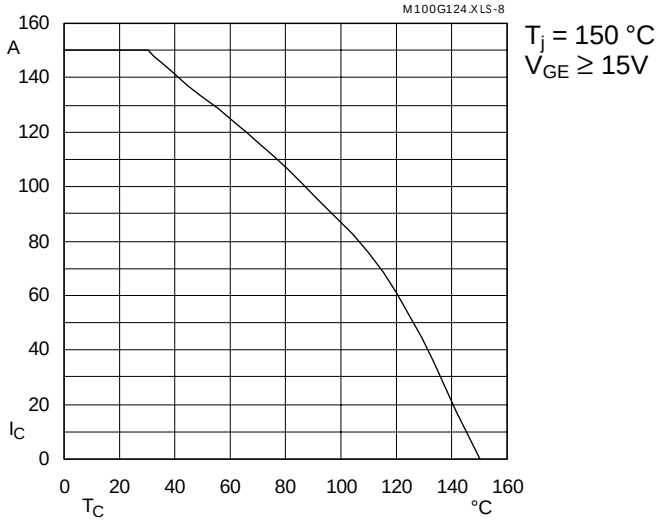

Fig. 8 Rated current vs. temperature $I_C = f(T_C)$

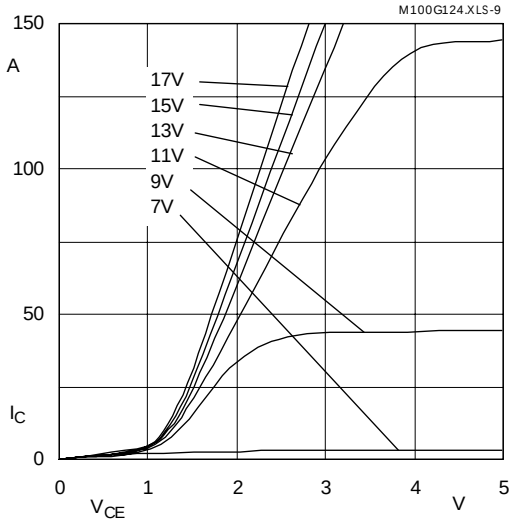

Fig. 9 Typ. output characteristic, t_p = 80 µs; 25 °C

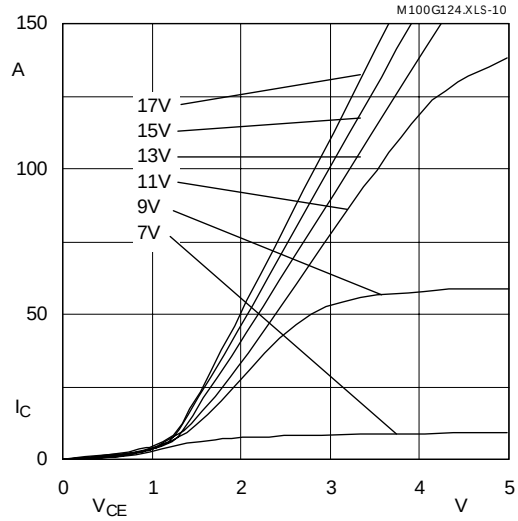

Fig. 10 Typ. output characteristic, t_p = 80 µs; 125 °C

$P_{cond(t)} = V_{CEsat(t)} \cdot I_{C(t)}$

$V_{CEsat(t)} = V_{CE(TO)(Tj)} + r_{CE(Tj)} \cdot I_{C(t)}$

$V_{CE(TO)(Tj)} \leq 1{,}3 + 0{,}0005\ (T_j - 25)$ [V]

typ.: $r_{CE(Tj)} = 0{,}0107 + 0{,}000033\ (T_j - 25)$ [Ω]

max.: $r_{CE(Tj)} = 0{,}0153 + 0{,}000047\ (T_j - 25)$ [Ω]

valid for $V_{GE} = +15^{+2}_{-1}$ [V]; $I_C > 0{,}3\ I_{Cnom}$

Fig. 11 Saturation characteristic (IGBT)
Calculation elements and equations

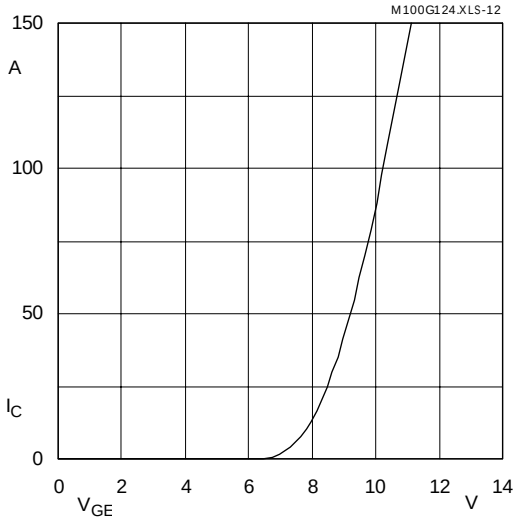

Fig. 12 Typ. transfer characteristic, t_p = 80 µs; V_{CE} = 20 V

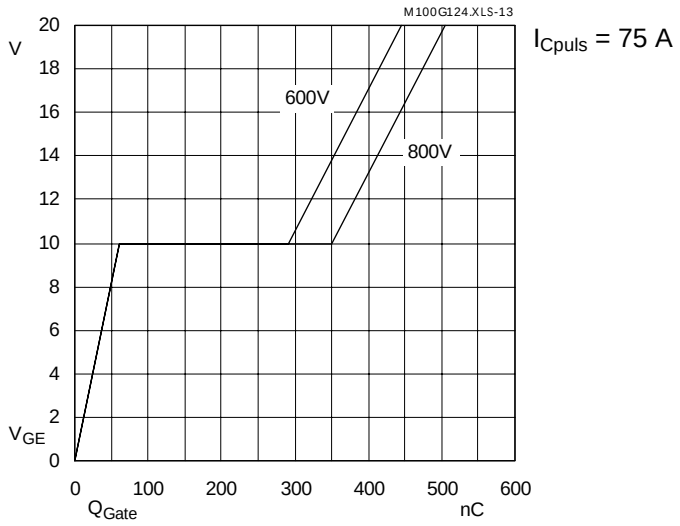

Fig. 13 Typ. gate charge characteristic

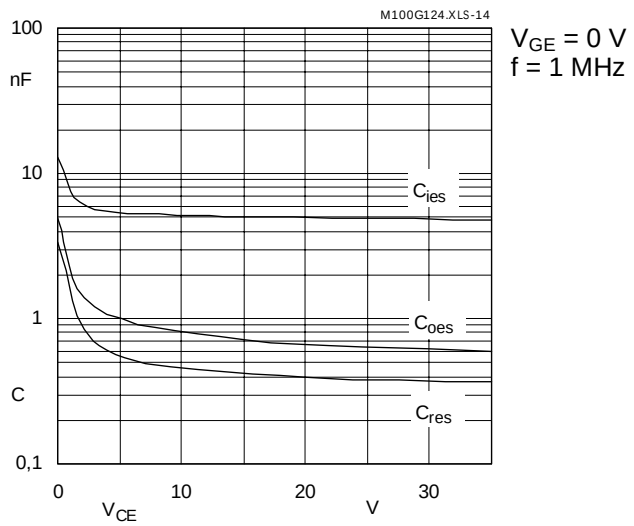

Fig. 14 Typ. capacitances vs.V_{CE}

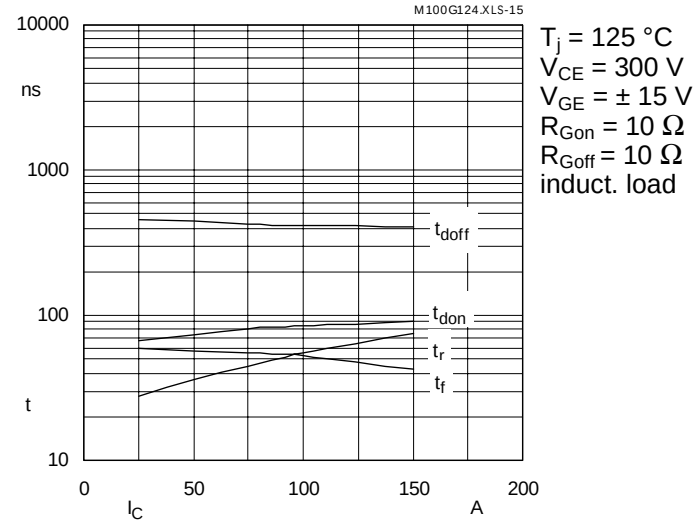

Fig. 15 Typ. switching times vs. I_C

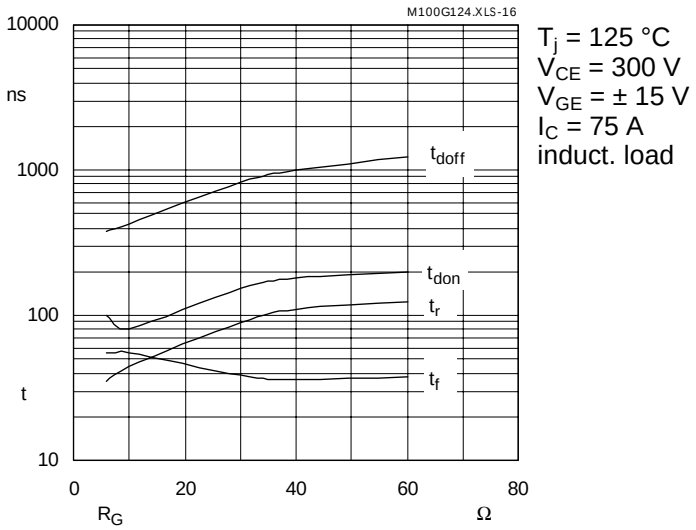

Fig. 16 Typ. switching times vs. gate resistor R_G

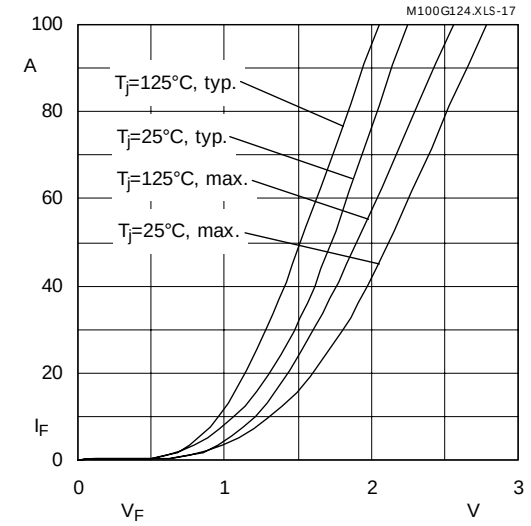

Fig. 17 Typ. CAL diode forward characteristic

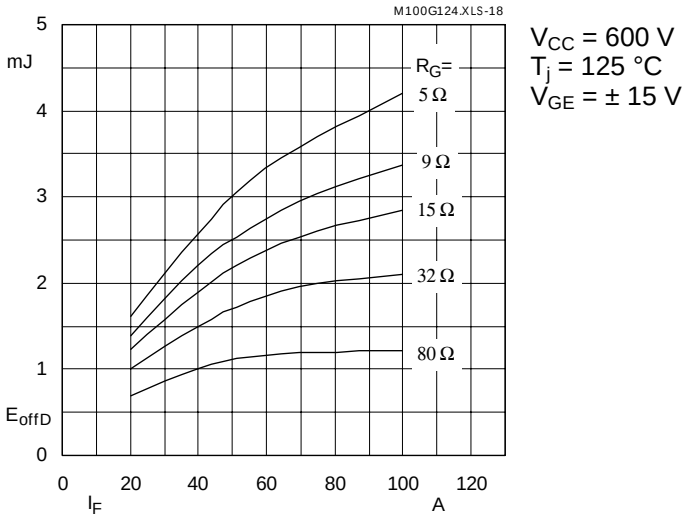

Fig. 18 Diode turn-off energy dissipation per pulse

 © by SEMIKRON

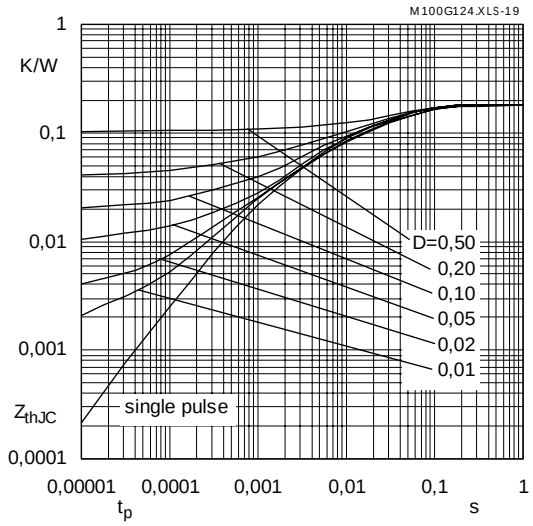

Fig. 19 Transient thermal impedance of IGBT
$Z_{thJC} = f(t_p)$; $D = t_p / t_c = t_p \cdot f$

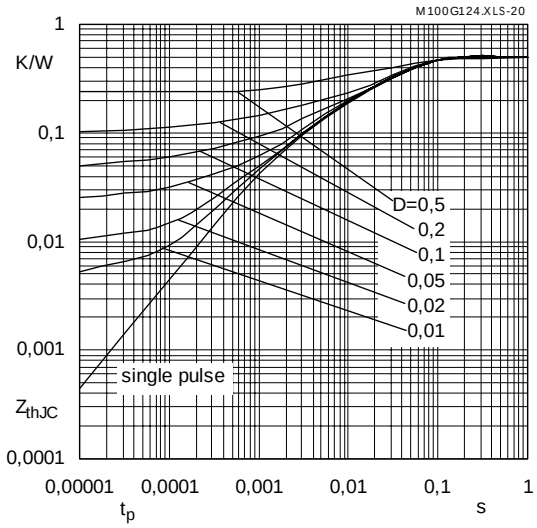

Fig. 20 Transient thermal impedance of inverse CAL diodes

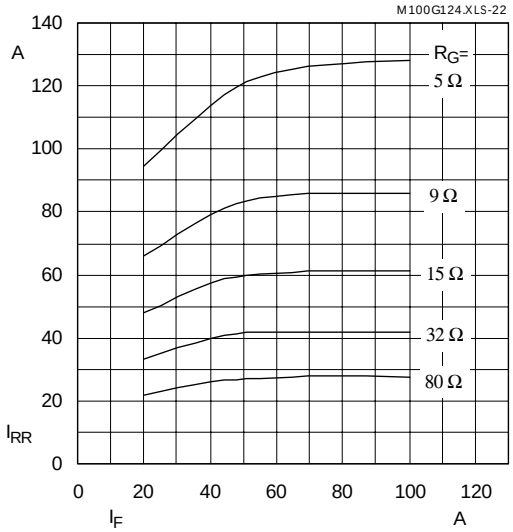

V_{CC} = 600 V
T_j = 125 °C
V_{GE} = ± 15 V

Fig. 22 Typ. CAL diode peak reverse recovery current $I_{RR} = f(I_F; R_G)$

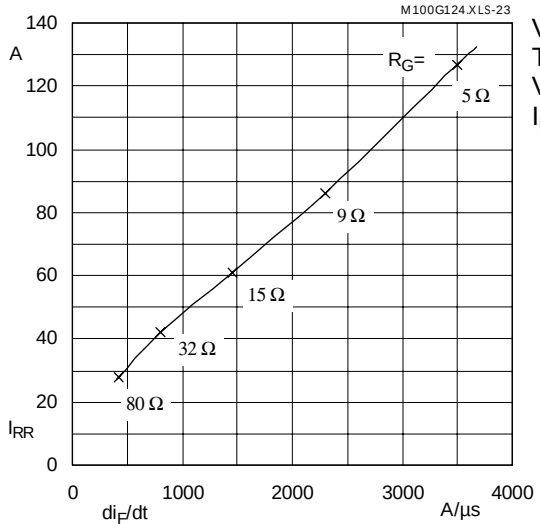

V_{CC} = 600 V
T_j = 125 °C
V_{GE} = ± 15 V
I_F = 75 A

Fig. 23 Typ. CAL diode peak reverse recovery current $I_{RR} = f(di/dt)$

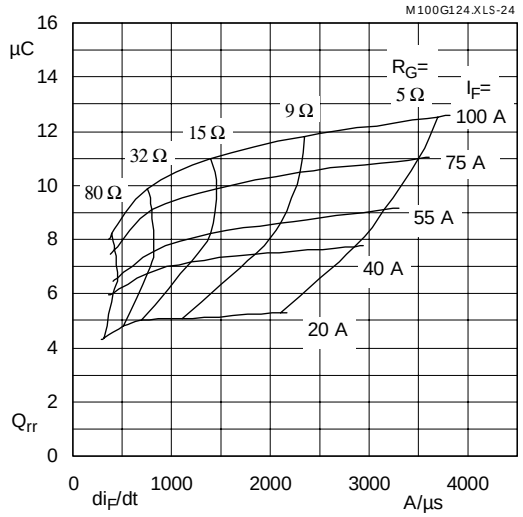

V_{CC} = 600 V
T_j = 125 °C
V_{GE} = ± 15 V

Fig. 24 Typ. CAL diode recovered charge

Typical Applications include

Switched mode power supplies
DC servo and robot drives
Inverters
DC choppers
AC motor speed control
UPS Uninterruptable power supplies
General power switching applications

SEMITRANS 2
Case D 61
UL Recognized
File no. E 63 532

SKM 100 GB 124 D

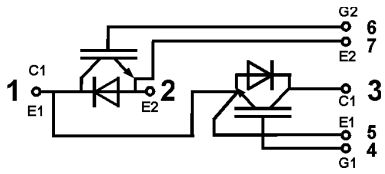

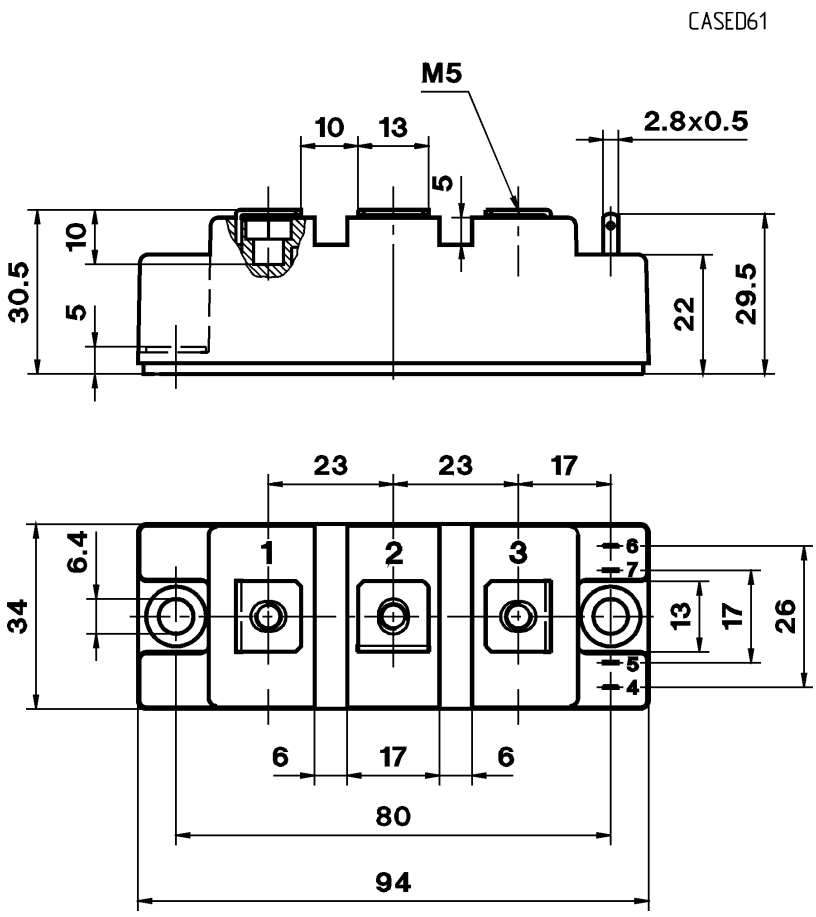

Dimensions in mm

Case outline and circuit diagram

Mechanical Data						
Symbol	Conditions		Values			Units
			min.	typ.	max.	
M_1	to heatsink, SI Units	(M6)	3	–	5	Nm
	to heatsink, US Units		27	–	44	lb.in.
M_2	for terminals, SI Units	(M5)	2,5	–	5	Nm
	for terminals, US Units		22	–	44	lb.in.
a			–	–	5x9,81	m/s^2
w			–	–	160	g

This is an electrostatic discharge sensitive device (ESDS). Please observe the international standard IEC 747-1, Chapter IX.

Eight devices are supplied in one SEMIBOX A without mounting hardware, which can be ordered separately under Ident No. 33321100 (for 10 SEMITRANS 2)

Larger packing units of 20 or 42 pieces are used if suitable

Accessories → B 6 – 4

SEMIBOX → C – 1.

 © by SEMIKRON