



Absolute Maximum Ratings		Values	Units
Symbol	Conditions ¹⁾		
V _{CES}		1200	V
V _{CGR}	R _{GE} = 20 kΩ	1200	V
I _C	T _{case} = 25/80 °C	700 / 500	A
I _{CM}	T _{case} = 25/80 °C; t _p = 1 ms	1400 / 1000	A
V _{GES}		± 20	V
P _{tot}	per IGBT, T _{case} = 25 °C	3000	W
T _J , (T _{stg})		-40 ... +150 (125)	°C
V _{isol}	AC, 1 min.	2500	V
humidity	DIN 40040	Class F	
climate	DIN IEC 68 T.1	40/125/56	
Inverse Diode			
I _F = -I _C	T _{case} = 25/80 °C	500 / 350	A
I _{FM} = -I _{CM}	T _{case} = 25/80 °C; t _p = 1 ms	1400 / 1000	A
I _{FSM}	t _p = 10 ms; sin.; T _J = 150 °C	3600	A
I ² t	t _p = 10 ms; T _J = 150 °C	64 800	A ² s

SEMITRANS® M Low Loss IGBT Modules

SKM 500 GA 124 D

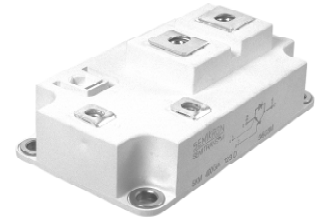

SEMITRANS 4



GA

Features

- MOS input (voltage controlled)
- N channel, homogeneous Silicon structure (NPT-Non punch through-IGBT)
- Low inductance case
- Very low tail current with low temperature dependence
- High short circuit capability, self limiting to 6 * I_{cnom}
- Latch-up free
- Fast & soft inverse CAL diodes ⁸⁾
- Isolated copper baseplate using DCB Direct Copper Bonding Technology without hard mould
- Large clearance (12 mm) and creepage distances (20 mm)

Typical Applications

- Switching (not for linear use)
- Inverter drives
- UPS

Characteristics		min.	typ.	max.	Units
Symbol	Conditions ¹⁾				
V _{(BR)CES}	V _{GE} = 0, I _C = 6 mA	≥ V _{CES}	-	-	V
V _{GE(th)}	V _{GE} = V _{CE} , I _C = 16 mA	4,5	5,5	6,5	V
I _{CES}	V _{GE} = 0 } T _J = 25 °C	-	-	10	mA
	V _{CE} = V _{CES} } T _J = 125 °C	-	15	-	mA
I _{GES}	V _{GE} = 20 V, V _{CE} = 0	-	-	1	µA
V _{CESat}	I _C = 400 A } V _{GE} = 15 V;	-	2,1(2,4)	2,45(2,85)	V
V _{CESat}	I _C = 500 A } T _J = 25 (125) °C }	-	2,5(2,8)	-	V
g _{fs}	V _{CE} = 20 V, I _C = 400 A	216	150	-	S
C _{CHC}		-	-	1500	pF
C _{ies}	} V _{GE} = 0 } V _{CE} = 25 V } f = 1 MHz	-	26	40	nF
C _{oes}		-	4	5,2	nF
C _{res}		-	2	2,6	nF
L _{CE}		-	-	20	nH
t _{d(on)}	} V _{CC} = 600 V } V _{GE} = -15 V / +15 V ³⁾ } I _C = 400 A, ind. load } R _{Gon} = R _{Goff} = 3 Ω } T _J = 125 °C	-	100	600	ns
t _r		-	75	340	ns
t _{d(off)}		-	660	1100	ns
t _f		-	82	125	ns
E _{on}		-	39	-	mWs
E _{off}		-	57	-	mWs
Inverse Diode ⁸⁾					
V _F = V _{EC}	I _F = 400 A } V _{GE} = 0 V; I _F = 500 A } T _J = 25 (125) °C }	-	2,0(1,8)	2,5	V
V _F = V _{EC}		-	2,25(2,1)	-	V
V _{TO}	T _J = 125 °C	-	-	1,2	V
r _t	T _J = 125 °C	-	-	3	mΩ
I _{RRM}	I _F = 400 A; T _J = 25 (125) °C ²⁾	-	180	-	A
Q _{rr}	I _F = 400 A; T _J = 25 (125) °C ²⁾	-	52	-	µC
Thermal characteristics					
R _{thjc}	per IGBT	-	-	0,041	°C/W
R _{thjc}	per diode D	-	-	0,09	°C/W
R _{thch}	per module	-	-	0,038	°C/W

¹⁾ T_{case} = 25 °C, unless otherwise specified

²⁾ I_F = -I_C, V_R = 600 V, -di_F/dt = 2000 A/µs, V_{GE} = 0 V

³⁾ Use V_{GEoff} = -5 ... -15 V

⁸⁾ CAL = Controlled Axial Lifetime Technology.

Cases and mech. data

→ B 6 – 218

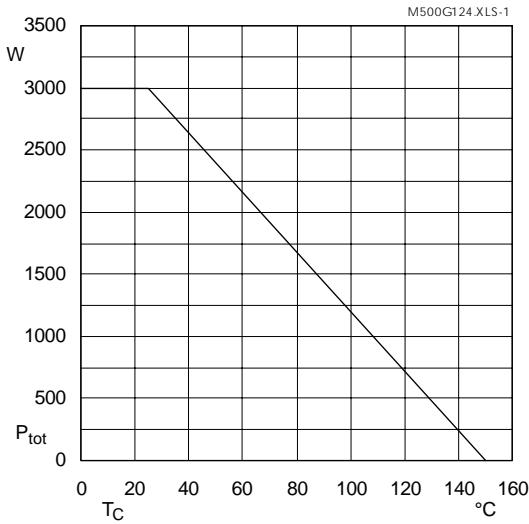


Fig. 1 Rated power dissipation $P_{tot} = f(T_C)$

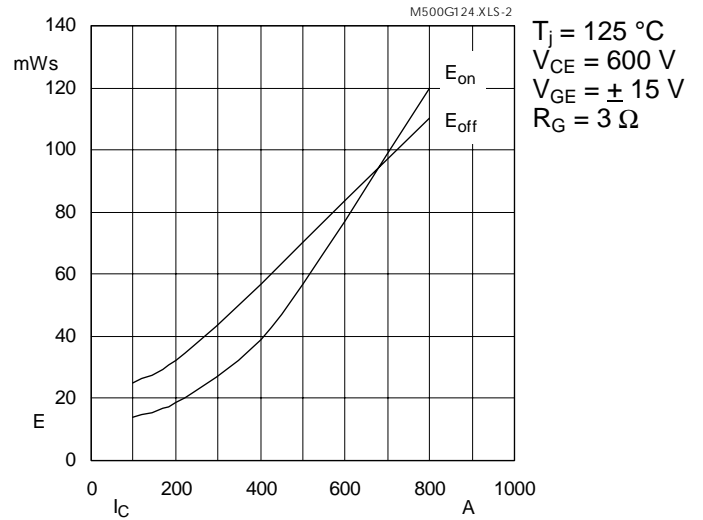


Fig. 2 Turn-on /-off energy $E = f(I_C)$

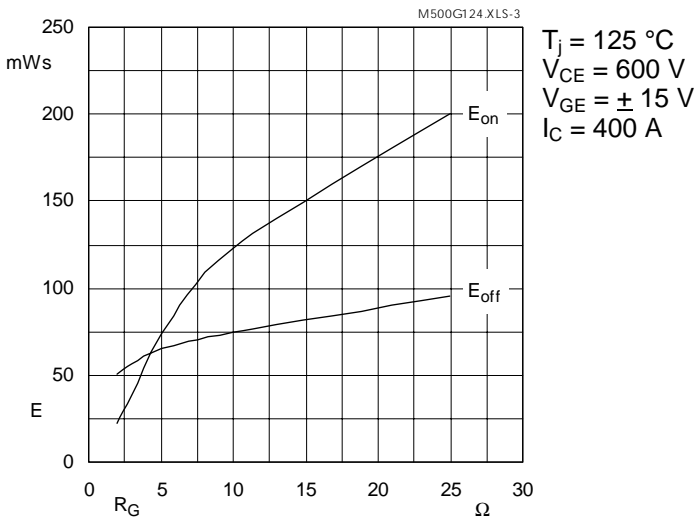


Fig. 3 Turn-on /-off energy $E = f(R_G)$

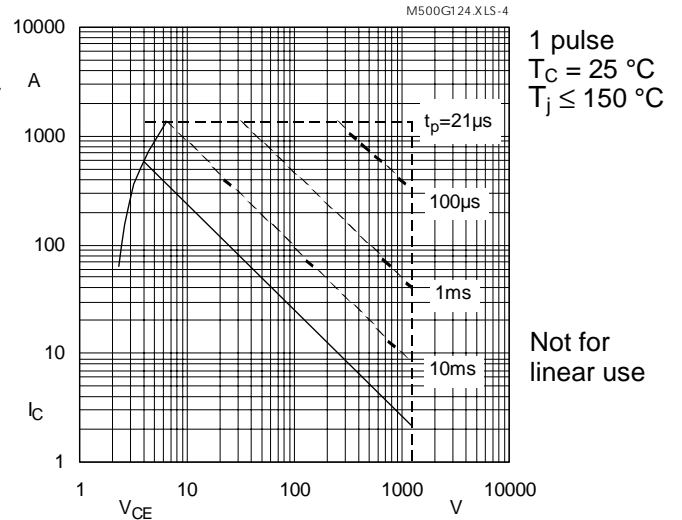


Fig. 4 Maximum safe operating area (SOA) $I_C = f(V_{CE})$

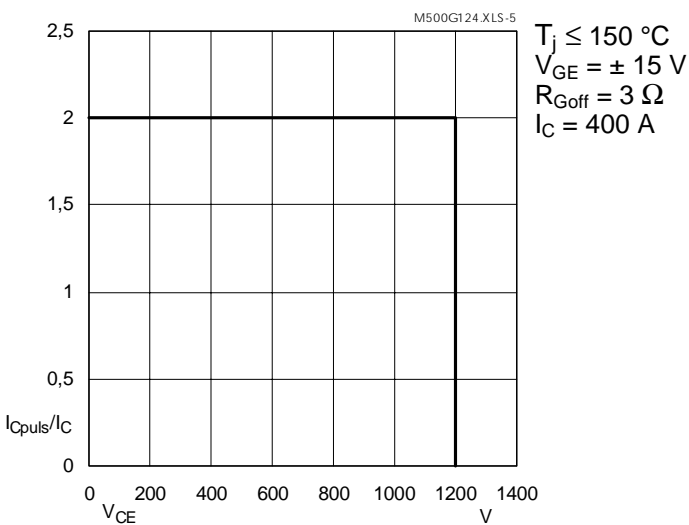


Fig. 5 Turn-off safe operating area (RBSOA)

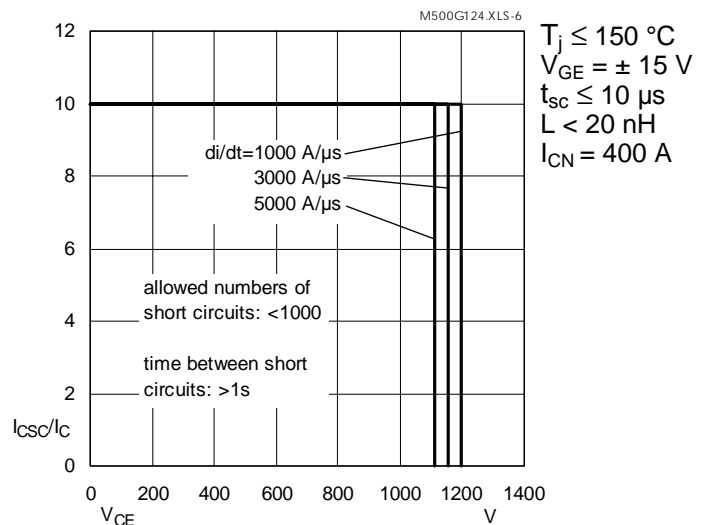


Fig. 6 Safe operating area at short circuit $I_C = f(V_{CE})$

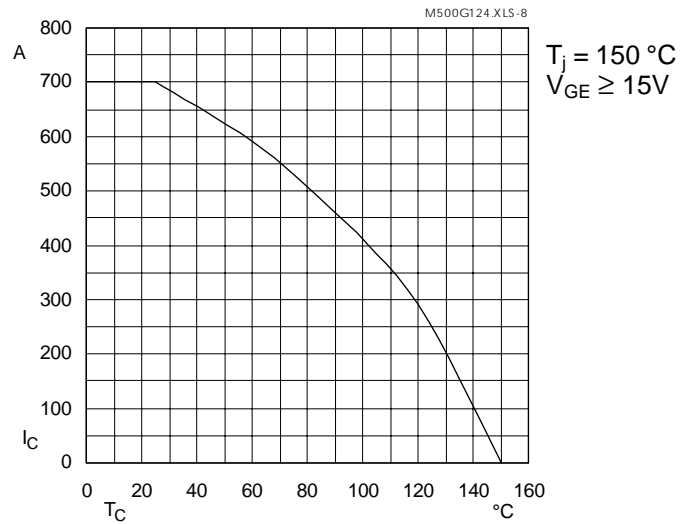


Fig. 8 Rated current vs. temperature $I_C = f(T_C)$

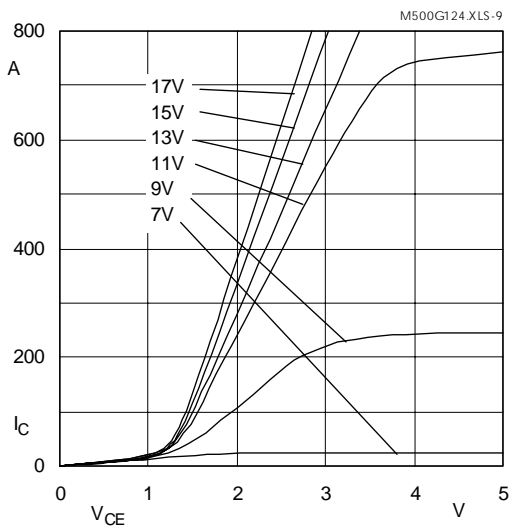


Fig. 9 Typ. output characteristic, $t_p = 80\text{ }\mu\text{s}$; $25\text{ }^\circ\text{C}$

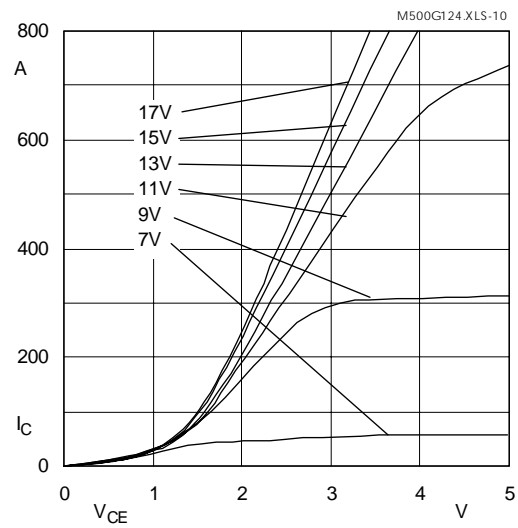


Fig. 10 Typ. output characteristic, $t_p = 80\text{ }\mu\text{s}$; $125\text{ }^\circ\text{C}$

$$P_{\text{cond}(t)} = V_{\text{CEsat}(t)} \cdot I_C(t)$$

$$V_{\text{CEsat}(t)} = V_{\text{CE(TO)(Tj)}} + r_{\text{CE(Tj)}} \cdot I_C(t)$$

$$V_{\text{CE(TO)(Tj)}} \leq 1,3 + 0,005 (T_j - 25) \text{ [V]}$$

$$\text{typ.: } r_{\text{CE(Tj)}} = 0,0020 + 0,000006 (T_j - 25) \text{ [\Omega]}$$

$$\text{max.: } r_{\text{CE(Tj)}} = 0,0029 + 0,000009 (T_j - 25) \text{ [\Omega]}$$

$$\text{valid for } V_{\text{GE}} = +15 \pm 2 \text{ [V]; } I_C \geq 0,3 I_{\text{Cnom}}$$

Fig. 11 Saturation characteristic (IGBT)
Calculation elements and equations

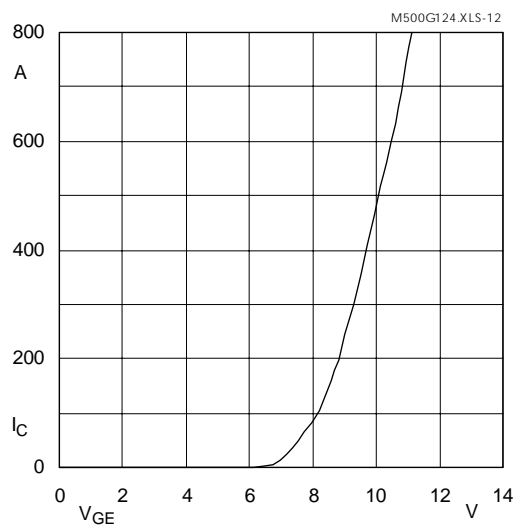


Fig. 12 Typ. transfer characteristic, $t_p = 80\text{ }\mu\text{s}$; $V_{CE} = 20\text{ V}$

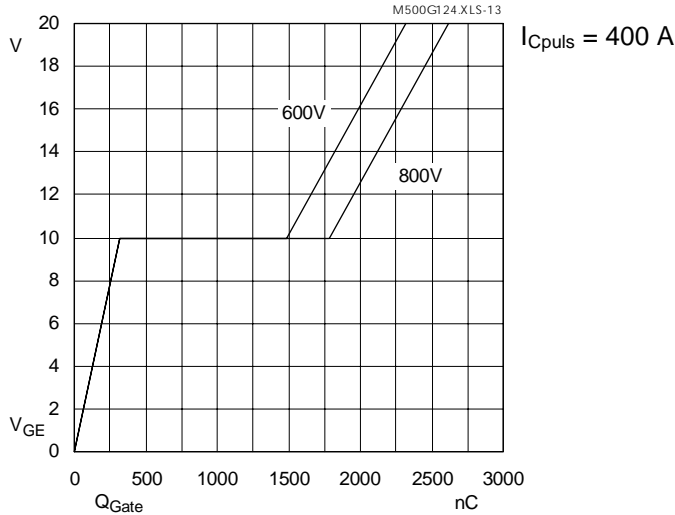


Fig. 13 Typ. gate charge characteristic

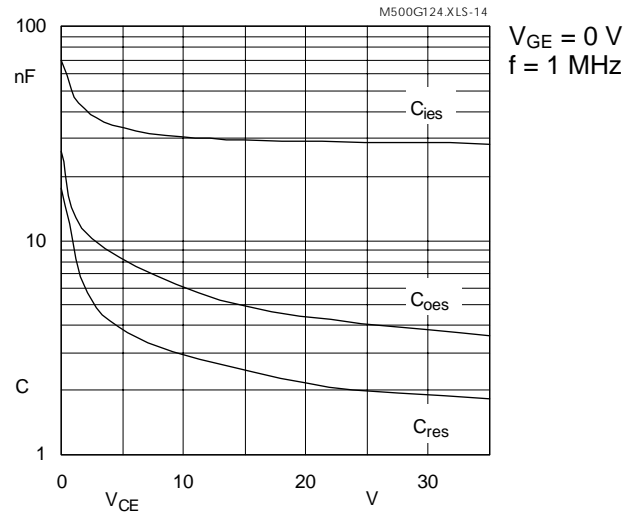


Fig. 14 Typ. capacitances vs. V_{CE}

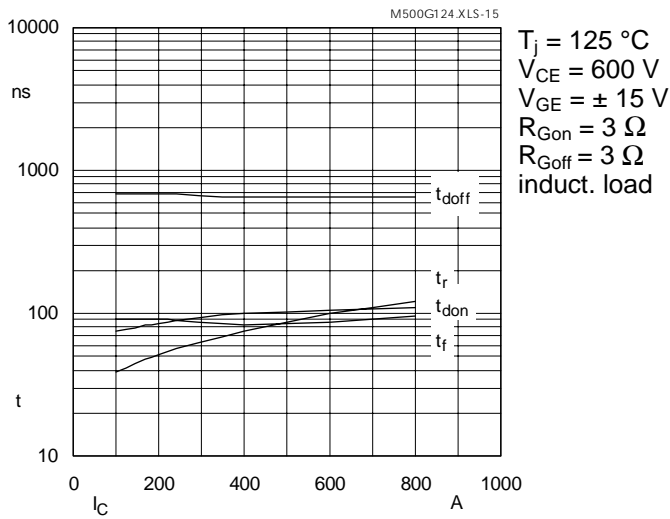


Fig. 15 Typ. switching times vs. I_C

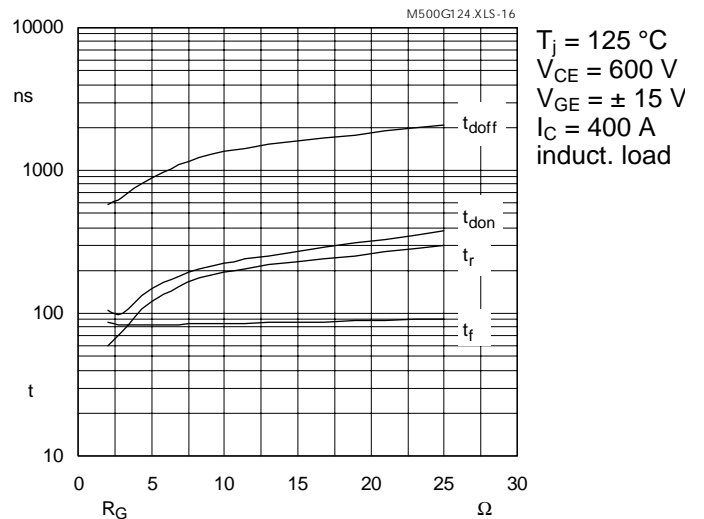


Fig. 16 Typ. switching times vs. gate resistor R_G

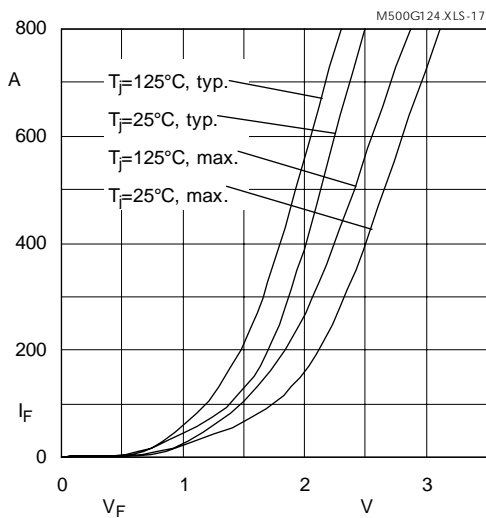


Fig. 17 Typ. CAL diode forward characteristic

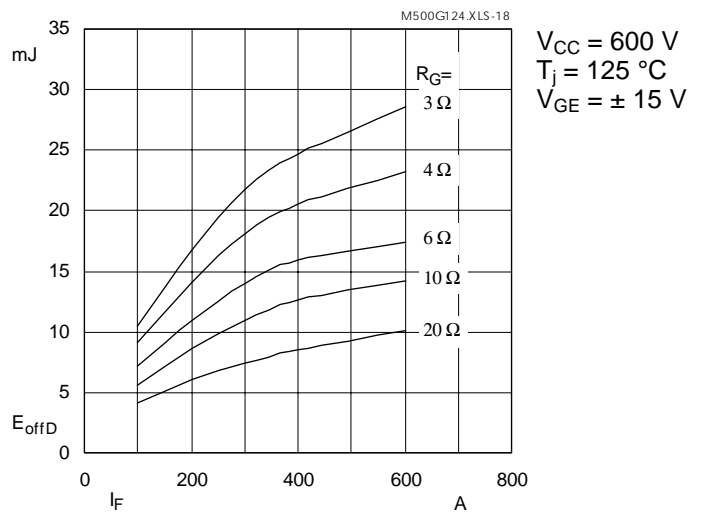


Fig. 18 Diode turn-off energy dissipation per pulse

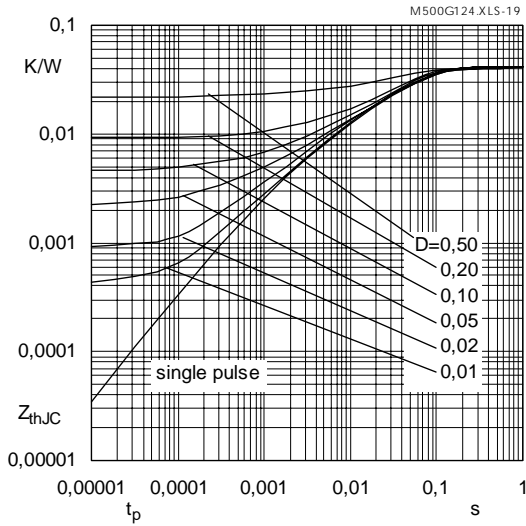


Fig. 19 Transient thermal impedance of IGBT
 $Z_{thJC} = f(t_p)$; $D = t_p / t_c = t_p \cdot f$

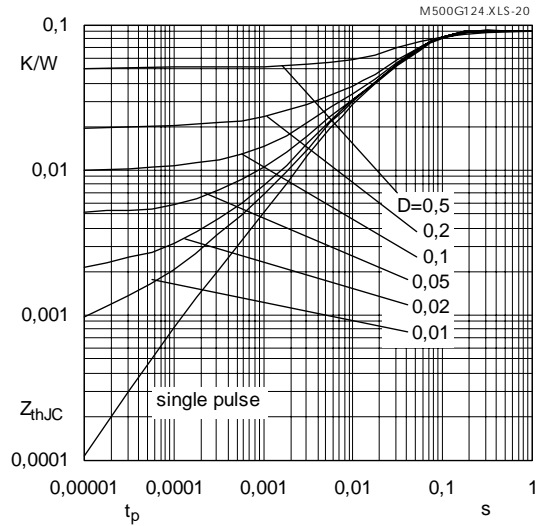


Fig. 20 Transient thermal impedance of inverse CAL diodes
 $Z_{thJC} = f(t_p)$; $D = t_p / t_c = t_p \cdot f$

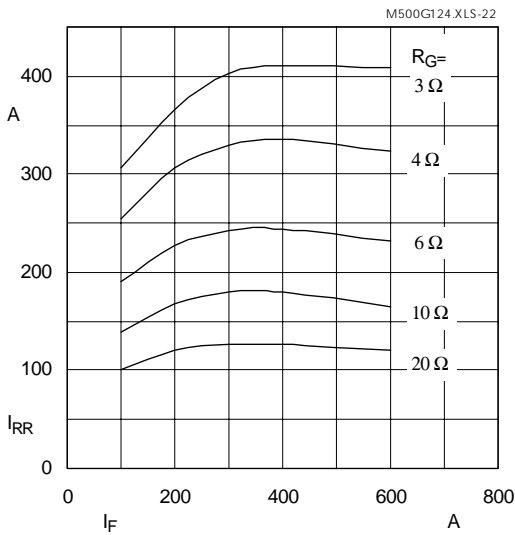


Fig. 22 Typ. CAL diode peak reverse recovery current $I_{RR} = f(I_F; R_G)$

$V_{CC} = 600 \text{ V}$
 $T_j = 125 \text{ }^\circ\text{C}$
 $V_{GE} = \pm 15 \text{ V}$

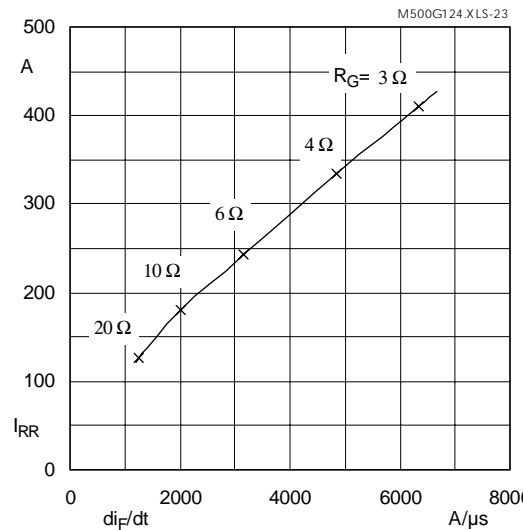


Fig. 23 Typ. CAL diode peak reverse recovery current $I_{RR} = f(di_F/dt; R_G)$

$V_{CC} = 600 \text{ V}$
 $T_j = 125 \text{ }^\circ\text{C}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_F = 400 \text{ A}$


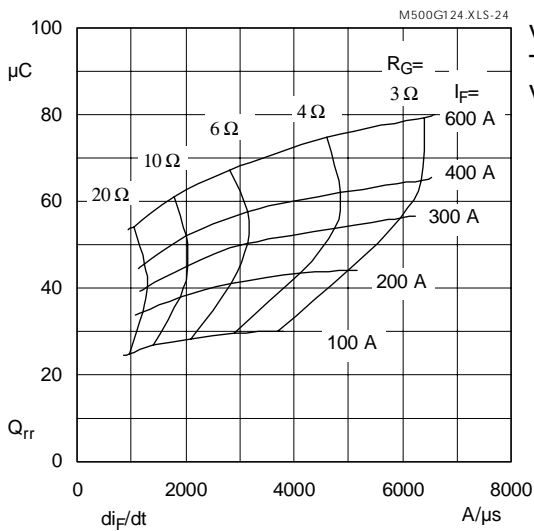


Fig. 24 Typ. CAL diode recovered charge
 $Q_{RR} = f(di_F/dt; I_F; R_G)$

$V_{CC} = 600 \text{ V}$
 $T_j = 125 \text{ }^\circ\text{C}$
 $V_{GE} = \pm 15 \text{ V}$

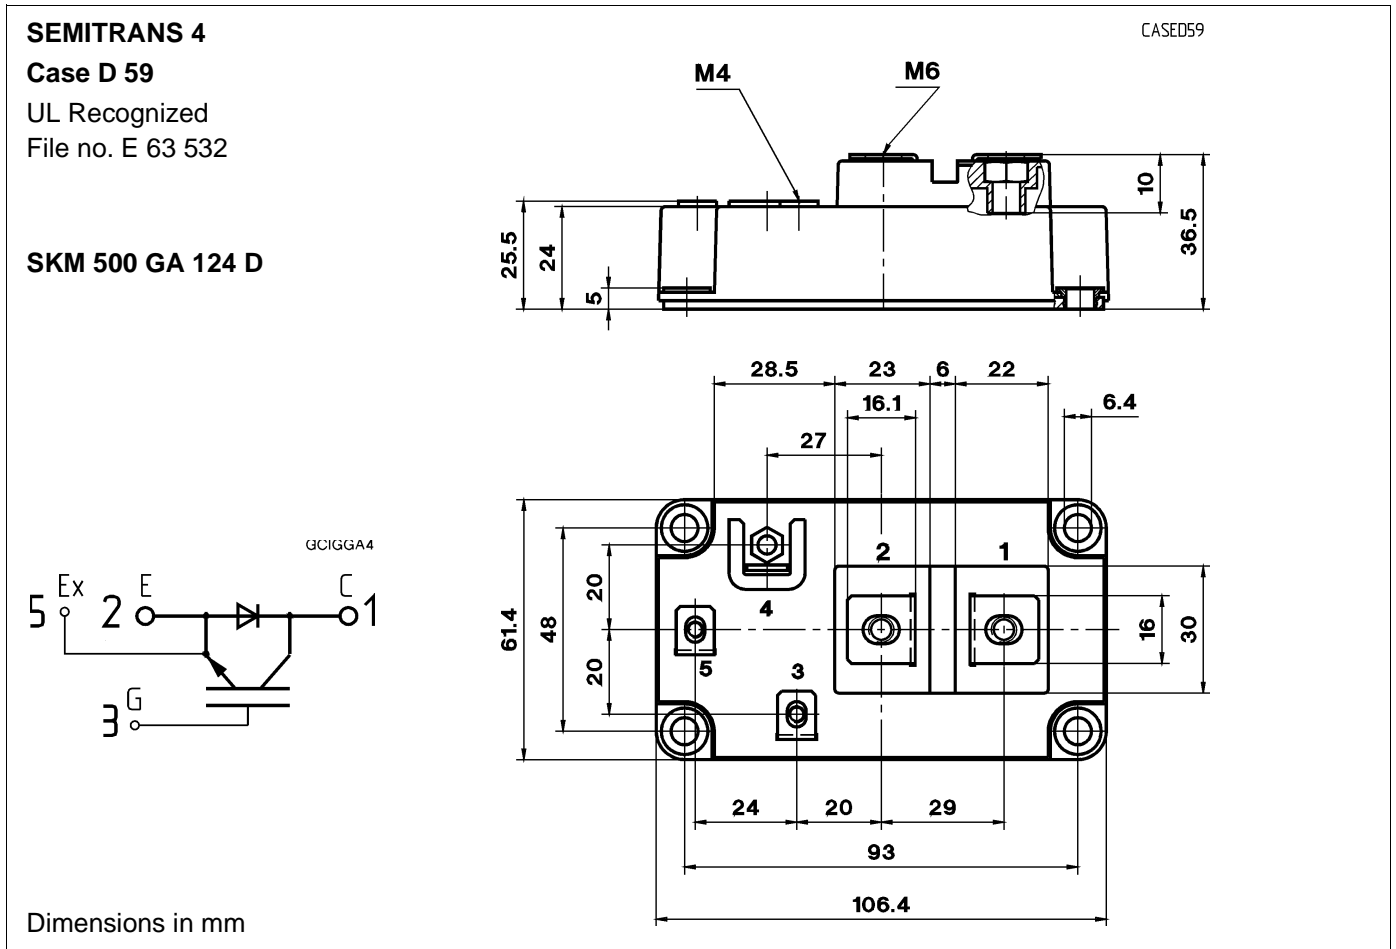

Case outline and circuit diagram

Mechanical Data			Values			Units
			min.	typ.	max.	
M ₁	to heatsink, SI Units to heatsink, US Units	(M6)	3 27	—	5 44	Nm lb.in.
M ₂	for terminals, SI Units for terminals, US Units	(M6/M4)	2,5/1,1 22/10	—	5/2 44/18	Nm lb.in.
a			—	—	5x9,81	m/s ²
w			—	—	330	g

This is an electrostatic discharge sensitive device (ESDS). Please observe the international standard IEC 747-1, Chapter IX.

Three devices are supplied in one SEMIBOX A without mounting hardware, which can be ordered separately under Ident No. 33321100 (for 10 SEMITRANS 4)

Larger packing units of 12 or 20 pieces are used if suitable
 Accessories → B 6 – 4
 SEMIBOX → C – 1.