



BXB100 SERIES

Single output

- Industry standard footprint
- High power density (36.5W/in³)
- MTBF >1.4 million hours (Bellcore 332)
- Input voltage to ETS300-132-2
- Adjustable output voltage
- No minimum load required
- Separate case ground pin
- Undervoltage lockout (UVLO)
- UL, VDE and CSA safety approvals

The BXB100 Series are high power density DC/DC converters packaged in the industry standard footprint (2.40 x 2.28 x 0.50 inches) to give designers optimum choices when specifying for both new and replacement designs. Suitable for a wide range of applications in nearly any industry, the BXB100 was particularly designed with communication and distributed power applications in mind. Using Bellcore 332, the MTBF is greater than 1,400,000 hours. Aluminum baseplate technology with four threaded M3 inserts makes heatsink attachment and optimum thermal management easy. The BXB100 series are approved to IEC950 by UL, CSA and VDE.

SPECIFICATION All specifications are typical at nominal input, full load at 25°C unless otherwise stated

OUTPUT SPECIFICATI	ONS			
Voltage adjustability		60% to 110%		
Set point accuracy		±1.0%		
Line regulation	Low line to high line ±0.05			
Load regulation	Full load to min.	toad ±0.10%		
Minimum load		0%		
Overshoot	At turn-on and t	urn-off None		
Undershoot		None		
Ripple and noise	3.3V and 5V	75mV pk-pk,		
(5Hz to 20MHz) (See Note 1)	12V and 15V	20mV rms 100mV pk-pk, 30mV rms		
T				
Temperature coefficient		±0.01%/°C		
Transient response (See Note 2)		±2.0% max. deviation 170μs recovery to within ±1.0%		
Remote sense	I	0.5VDC transmission line drop compensation		
INPUT SPECIFICATIONS				
Input voltage range	24Vin nominal 48Vin nominal	18 to 36VDC 36 to 75VDC		
Input current	No load Remote OFF	100mA max. 20mA max.		
Input current (max.) (See Note 4)	48V models	4A max. @ Io max. and Vin = 0 to 75V		
Input reflected ripple	(See Note 6)	5mA pk-pk		
Logic compatibility Open collector ref to -inpu ON 1.2VDC max		(See Note 7) en collector ref to -input 1.2VDC max. Open circuit		

INPUT SPECIFICATION	IS CONTINUED			
Undervoltage lockout	24Vin: power up1724Vin: power down1648Vin: power up3448Vin: power down32.5			
Start-up time (See Note 8)	Power up 20ms Remote ON/OFF 20ms			
EMC CHARACTERISTI	cs			
Conducted emissions (See Note 3)	EN55022 (See Note 3 FCC part 15 EN55022, CISPR22) Level A Level A Level A		
GENERAL SPECIFICAT	TIONS			
Efficiency		See table		
Isolation voltage	Input/case Input/output Output/case	1500VDC 1500VDC 1500VDC		
Switching frequency	Fixed	500kHz typ.		
Approvals and standards (See Note 5)	VDE0805, UL1950, CS	EN60950, IEC950 SA C22.2 No. 950		
Case material	Alu	uminum baseplate with plastic case		
Material flammability		UL94V-0		
Weight		110g (3.88oz)		
MTBF	Bellcore 332 MIL-HDBK-217F @ 40°C, 100% load	1,400,000 hours 580,000 hours min.		
ENVIRONMENTAL SPECIFICATIONS				
Thermal performance	Operating case temp. Non-operating	-40°C to +100°C -55°C to +125°C		
Altitude	Operating Non-operating	10,000 feet max. 40,000 feet max.		
Vibration	5Hz to 500Hz 2	2.4G rms (approx.)		

Continuous, automatic recovery

Non-latching

Non-latching

ETS300-132-2

110°C baseplate,

automatic recovery

66 to 100 Watt Wide input DC/DC converters

OUTPUT POWER	INPUT	OUTPUT OUTPUT OUTPUT OUTPUT OUTPUT OUTPUT EFFICIE	EFFICIENCY	CY REGULATION		MODEL			
(MAX.)	VOLTAGE	011	VOLTAGE		(TYP.)	LINE	LOAD	NUMBER ⁽⁷⁾	
66W	18-36VDC	4.3VDC	3.3V	0A	20A	77%	±0.05%	±0.1%	BXB100-24S3V3FLT
100W	18-36VDC	6.5VDC	5V	0A	20A	82%	±0.05%	±0.1%	BXB100-24S05FLT
100W	18-36VDC	14.5VDC	12V	0A	8.33A	85%	±0.05%	±0.1%	BXB100-24S12FLT
100W	18-36VDC	17.5VDC	15V	0A	6.67A	85%	±0.05%	±0.1%	BXB100-24S15FLT
66W	36-75VDC	4.3VDC	3.3V	0A	20A	78%	±0.05%	±0.1%	BXB100-48S3V3FLT
100W	36-75VDC	6.5VDC	5V	0A	20A	83%	±0.05%	±0.1%	BXB100-48S05FLT
100W	36-75VDC	14.5VDC	12V	0A	8.33A	86%	±0.05%	±0.1%	BXB100-48S12FLT
100W	36-75VDC	17.5VDC	15V	0A	6.67A	86%	±0.05%	±0.1%	BXB100-48S15FLT

PROTECTION

Short circuit protection

Overvoltage protection

Undervoltage protection

TELECOM SPECIFICATIONS

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed

by using the method shown below.

RT1 OR

RT2

TRIM UP

TRIM DOWN Ο

C

 $\bigcirc 1$

Central office interface A

Thermal protection

Notes

(SP

- Measured with 10µF tantalum capacitor and 1µF ceramic capacitor across 1 output.
- 2 di/dt = 0.1A/1µs, Vin = 48VDC, Tc = 25°C, load change = 0.5 lo max. to 0.75 lo max. and 0.75 lo max. to 0.5 lo max.
- Units should be characterised within systems. External components 3 required.
- 4 Input fusing is recommended based on surge current and maximum input current
- 5 This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
- Simulated source impedance of 12µH. 12µH inductor in series with +Vin. Active high remote on/off option is available (standard product is active 6 low), designate with the suffix 'FHT' e.g. **BXB100-48S05FHT**. Consult factory for further details and options.
- 8 Start-up into resistive load.


International Safety Standard Approvals

VDE0805/EN60950/IEC950 File No. 10401-3336-1095

LE UL1950 File No. E136005

CSA C22.2 No. 950 File No. LR41062C

PIN CONNECTIONS		
PIN NUMBER	FUNCTION	
1	+ Vin	
2	Remote ON/OFF	
3	Case	
4	- Vin	
5	- Vout	
6	- Sense	
7	Trim	
8	+ Sense	
9	+ Vout	

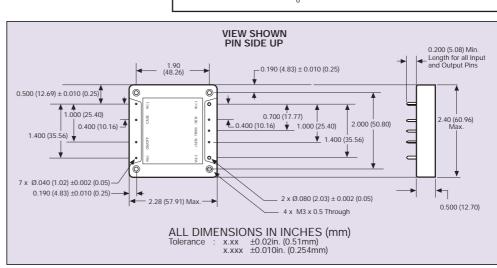

Data Sheet © Artesyn Technologies® 2000

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, Artesyn Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.



DS_BXB100_20000101.PDF