


トランジスタ・モジュール (NPN, ダーリントン接続, 1個内蔵)


- ダーリントン・トランジスタ1個内蔵
- フリーホイール・ダイオード付
- 電極と金属ケース部が絶縁されている
- 直流電流増幅率は80以上(定格電流にて)

■等価回路


AL-1



BK-1




BL-1


注1. $T_c = 25^\circ\text{C}$. 注2. A.C. 1分間。

型 名	最 大 定 格 (T _c = 25℃)											電 氣 的 特 性									
	V _{CB0}	V _{CEX(SUS)}	V _{EB0}	I _c	I _{CP} (lms)	I _B	I _F	I _{FM} (lms)	P _c (注1) (W)	T _J	T _{Jstg}	V _{I/O} (注2)	I _{CBO} (mA)	V _{CEX} (V)	I _{EB0} (mA)	V _{EB} (V)	V _{CE0(SUS)} 最小 I _C (A)	h _{FE} 最小	V _{CE} (V)	I _C (A)	
	(V)	(V)	(V)	(A)	(A)	(A)	(A)	(A)	(W)	(℃)	(℃)	(V)	最大	最大	最大	最大	最大	最大	最大	最大	
MG15G1AL3	600	600	6	15	30	1.5	15	30	120	150	-40~125	2500	1.0	600	100	6	450	0.5	100	5	15
MG15H1AL1	600	600	6	15	30	1.5	15	30	120	150	-40~125	2500	1.0	600	200	6	550	0.5	100	5	15
MG25M1BK1	1000	1000	7	25	50	2.5			300	150	-40~125	2500	1.0	1000	200	7	880	1.0	100	5	25
MG30G1BL3	600	600	6	30	60	3.0			250	150	-40~125	2500	1.0	600	200	6	450	0.5	100	5	30
MG30G1BL4	600	600	6	30	60	3.0			250	150	-40~125	2500	1.0	600	200	6	450	0.5	100	5	30
MG30G1JL1	600	600	6	30	60	3.0	30	60	250	150	-40~125	2500	1.0	600	200	6	450	0.5	100	5	30
MG50G1BL3	600	600	6	50	100	5.0			300	150	-40~125	2500	1.0	600	200	6	450	0.5	100	5	50
MG50G1JL1	600	600	6	50	100	5.0	50	100	300	150	-40~125	2500	1.0	600	200	6	450	0.5	100	5	50
MG50M1BK1	1000	1000	7	50	100	5.0			350	150	-40~125	2500	1.0	1000	200	7	880	1.0	100	5	50
MG60M1AL1	900	900	10	60	120	6.0	60	120	300	150	-55~150	-	1.0	900	300	10	450	0.5	100	5	60
MG75G1BL1	600	600	6	75	150	10			350	150	-40~125	2500	1.0	600	200	6	450	0.5	80	5	75
MG75M1AL1	900	900	10	75	150	7.5	75	150	350	150	-55~150	-	1.0	900	300	10	450	0.5	100	5	75
MG75M1BK1	1000	1000	7	75	150	5.0			400	150	-40~125	2500	1.0	1000	200	7	880	1.0	75	5	75
MG100G1AL3	600	600	6	100	200	10	100	200	600	150	-40~125	2500	2.0	600	400	6	450	0.5	100	5	100
MG100G1FL1	600	600	6	100	200	10	100	200	600	150	-40~125	2500	2.0	600	400	6	450	0.5	100	5	100
MG100G1JL1	600	600	6	100	200	10	100	200	400	150	-40~125	2500	2.0	600	200	6	450	0.5	100	5	100
MG150H1FL1	600	600	6	150	300	20	150	300	700	150	-40~125	2500	2.0	600	400	6	550	0.5	80	5	150
MG160S1UK1	1400	1400	7	160	320	16	160	320	1600	150	-40~125	2500	8.0	1400	600	7	1000	1.0	100	5	160
MG200H1AL2	600	600	6	200	400	25	200	400	800	150	-40~125	2500	2.0	600	400	6	550	0.5	80	5	200
MG200H1FL1A	600	600	6	200	400	25	200	400	800	150	-40~125	2500	2.0	600	400	6	550	0.5	80	5	200
MG200M1FK1	1000	1000	7	200	400	20	200	400	1400	150	-40~125	2500	8.0	1000	800	7	880	1.0	100	5	200


FK-1



FL-1



JL-1



注3. スイッチング時間の*印はtyp. 値。

(T _a = 25℃)											エミッタ・コレクタ間ダイオード							熱抵抗		等価回路	外形図	記	事	型名
飽和電圧 (V)		I _c	I _s	スイッチング時間 (μs)			I _{B1}	I _{B2}	V _{CE}	R _L	V _F (V)	I _F	t _{rr} (μs)	I _F	V _{BE}	di/dt (A/μs)	R _{th(j-c)} (℃/W)							
V _{CE}	V _{BE}			t _{on}	t _{off}	t _f											(A)	(A)	(V)					
最大	最大	(A)	(A)	最大	最大	最大	(A)	(A)	(V)	(Ω)	最大	(A)	最大	(A)	(V)	(A/μs)	最大	最大						
2.0	2.5	15	0.4	1	12	2	0.4	-0.4	300	20	1.5	15	2.0	15	-3	60	1.0	3.5	AL-1	2-22B1A				MG15G1AL3
2.0	2.5	15	0.4	1	12	2	0.4	-0.4	300	20	1.6	15	0.7	15	-3	60	1.04	3.5	AL-1	2-33F1A				MG15H1AL1
2.5	3.5	25	0.5	2	20	5	0.5	-1.5	600	24							0.41		BK-1	2-33D1A	F Dなし			MG25M1BK1
2.0	2.5	30	0.6	1	12	2	0.6	-0.6	300	10							0.5		BL-1	2-33C1A	F Dなし			MG30G1BL3
2.0	2.5	30	0.6	1	12	2	0.6	-0.6	300	10							0.5		BL-1	2-33F1A	F Dなし			MG30G1BL4
2.0	2.5	30	0.6	1	12	2	0.6	-0.6	300	10	1.6	30	1.0	30	-3	100	0.5	1.8	JL-1	2-68A2A	直列ダイオード V _{BE} = 600V			MG30G1JL1
2.0	2.5	50	1.0	1	12	2	1.0	-1.0	300	6							0.41		BL-1	2-33C1A	F Dなし			MG50G1BL3
2.0	2.5	50	1.0	1	12	2	1.0	-1.0	300	6	1.7	50	1.0	50	-3	100	0.41	1.3	JL-1	2-68A2A	直列ダイオード V _{BE} = 600V			MG50G1JL1
2.5	3.5	50	1.0	2	20	5	1.0	-3.0	600	12							0.36		BK-1	2-33D1A	F Dなし			MG50M1BK1
2.0	2.5	60	1.2	3.5	5	1	1.2	-10	120	2	1.5	60	3.0	60	-5	10	0.42	0.75	AL-1	2-37A1A	非絶縁タイプ			MG60M1AL1
2.0	2.5	75	1.5	2	12	2	1.5	-1.5	300	4							0.36		BL-1	2-33C1A	F Dなし			MG75G1BL1
2.0	2.5	75	1.5	3.5	5	1	1.5	-12	150	2	1.6	75	4.0	75	-5	10	0.35	0.65	AL-1	2-37A1A	非絶縁タイプ			MG75M1AL1
2.5	3.5	75	2.0	1.5	20	5	1.5	-4.5	600	8							0.31		BK-1	2-80B1A	F Dなし			MG75M1BK1
2.0	2.5	100	2.0	1	12	2	2.0	-2.0	300	3	1.5	100	2.0	100	-3	100	0.208	0.65	AL-1	2-68D2A				MG100G1AL3
2.0	2.5	100	2.0	1	12	2	2.0	-2.0	300	3	1.5	100	2.0	100	-3	100	0.208	0.65	FL-1	2-68C1A				MG100G1FL1
2.0	2.7	100	2.0	2	12	2	2.0	-2.0	300	3	1.7	100	1.0	100	-3	100	0.31	1.3	JL-1	2-68A2A	直列ダイオード V _{BE} = 600V			MG100G1JL1
2.0	2.7	150	4.0	2	12	5	4.0	-4.0	300	2	1.5	150	2.0	150	-3	100	0.178	0.65	FL-1	2-68C1A				MG150H1FL1
2.5	3.5	160	3.2	2	16	3	3.2	-9.6	600	3.75	1.8	160	1.2	160	-3	100	0.078	0.325	UK-1	2-109A3A				MG160S1UK1
2.0	2.7	200	6.0	2	12	4	6.0	-6.0	300	1.5	1.5	200	2.0	200	-3	100	0.156	0.65	AL-1	2-68D2A				MG200H1AL2
2.0	2.7	200	6.0	2	12	4	6.0	-6.0	300	1.5	1.5	200	2.0	200	-3	100	0.156	0.65	FL-1	2-98B1A				MG200H1FL1A
2.5	3.5	200	4.0	2	15	5	4.0	-4.0	600	3	1.8	200	1.0	200	-3	100	0.089	0.325	FK-1	2-80D2A				MG200M1FK1

FD-1



FD-2




FD-3




FD-4




FD-5

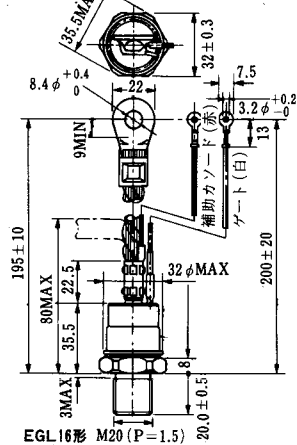


FD-6

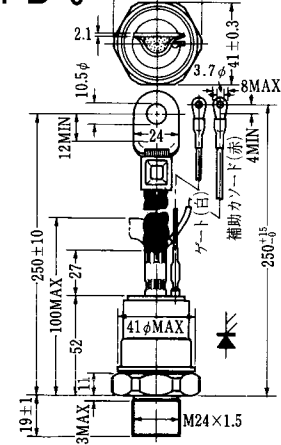

FD-7

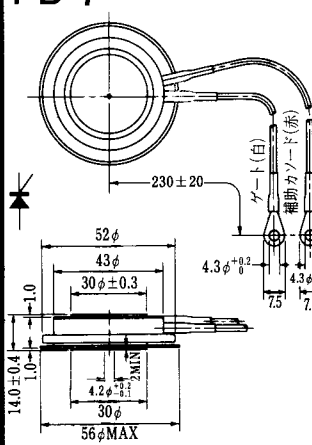


FD-8

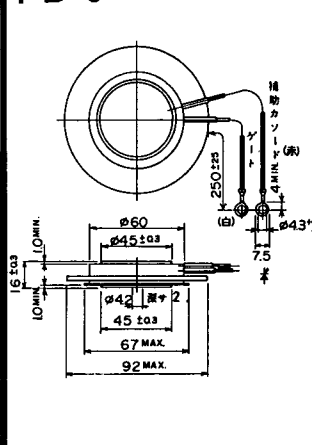

FD-9




FD-10

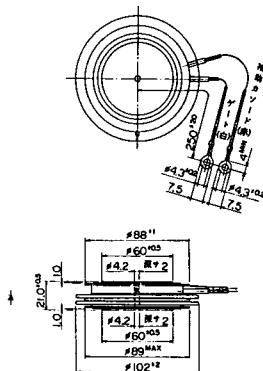


FD-11


FD-12

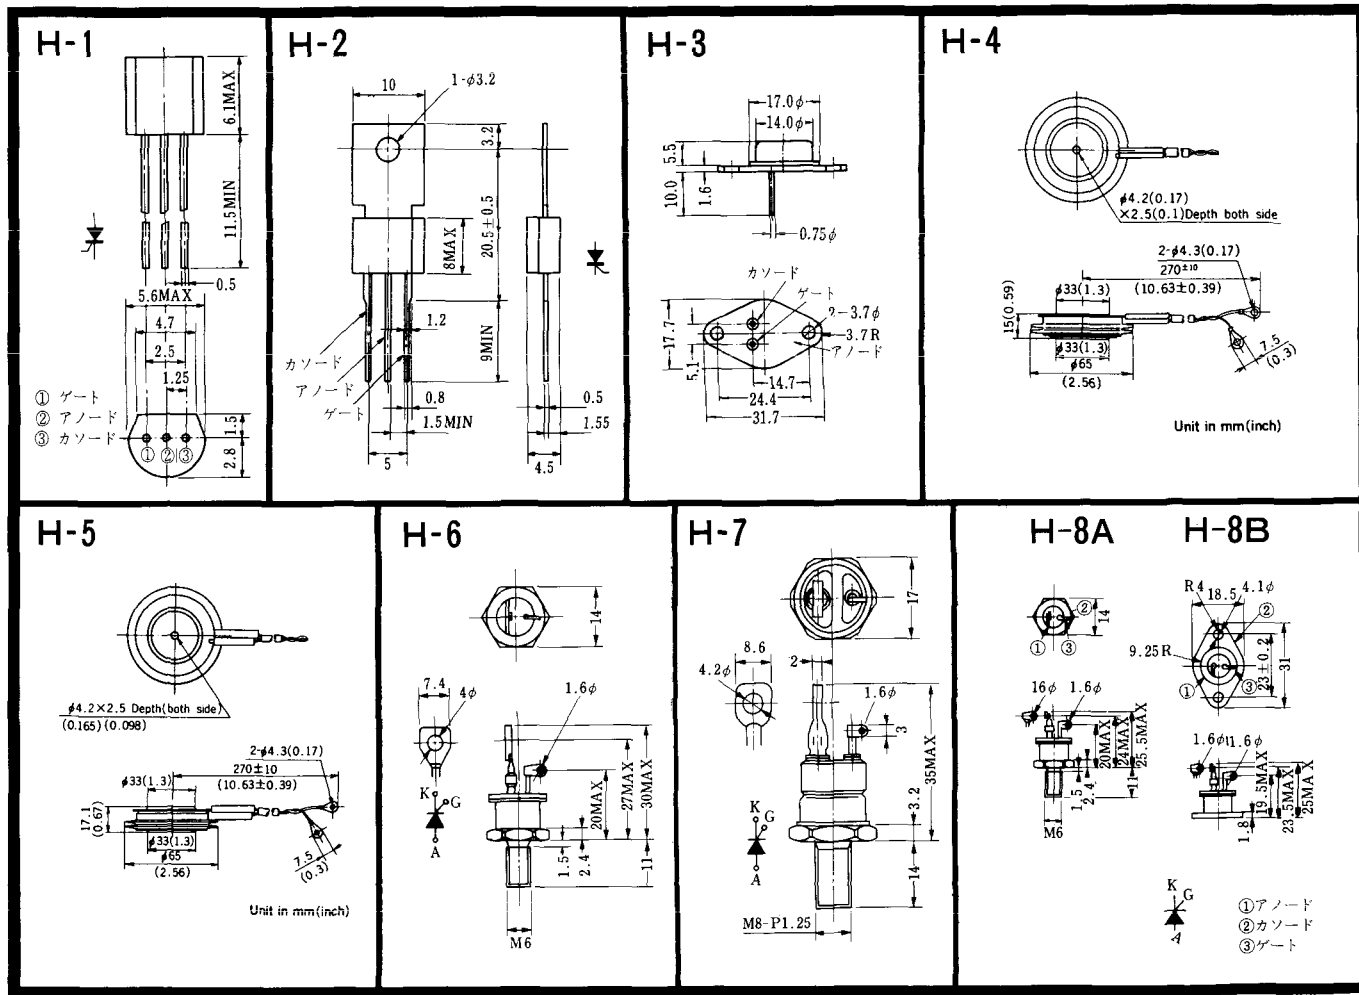

H-9A




H-9B




- ① アノード
- ② カソード
- ③ ゲート


H-10

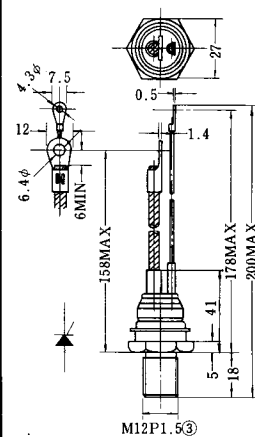


H-11

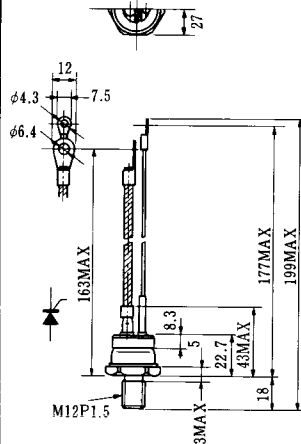


H-12

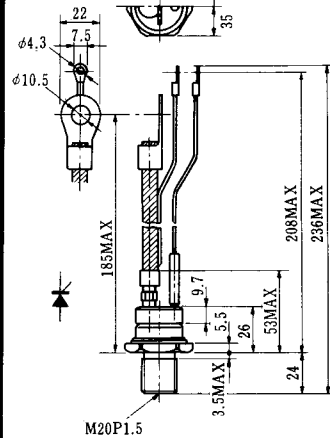


H-13

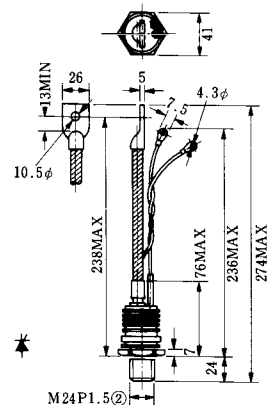


H-14




H-15




H-16

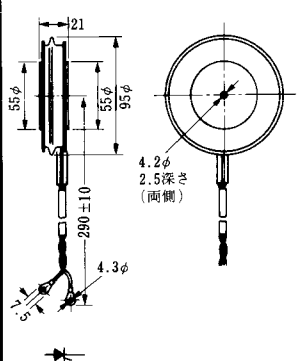


H-17

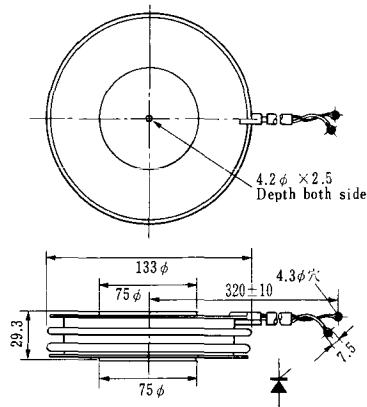


H-18




H-19

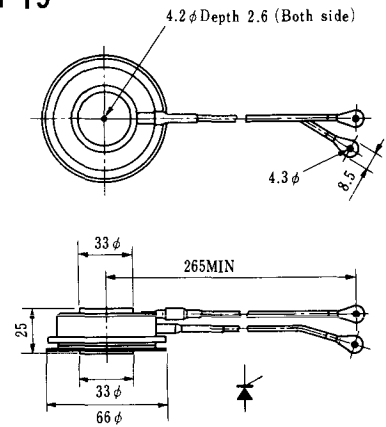


H-20

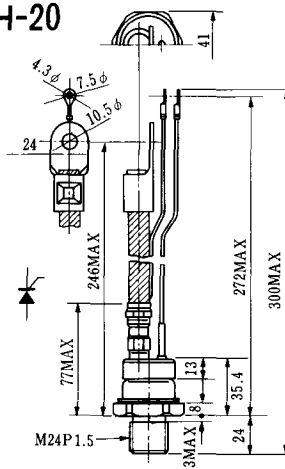

H-21

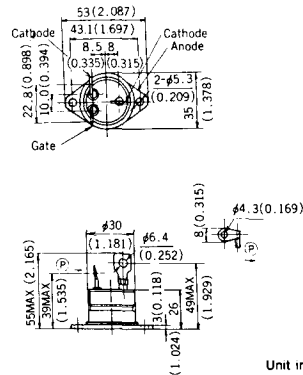

H-22

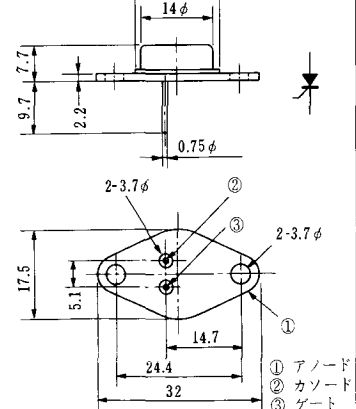

H-23



H-24



H-25



H-26




Type	Direction of polarity
CA12	

H-27



Type	Direction of polarity
CF11V	

H-28

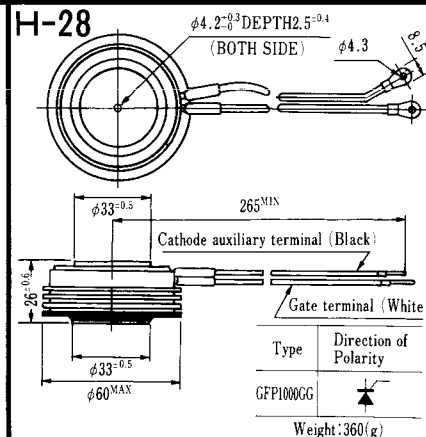

Note: The thickness is a dimension in press at the rated mounting force.

H-29



Note : The thickness is a dimension in press at the rated mounting force. Weight: 870(g)

H-30



Note : The thickness is a dimension in press at the rated mounting force. Weight: 1,460(g)

HT-1



Unit in mm (inch)

HT-2




HT-3



HT-4



HT-5

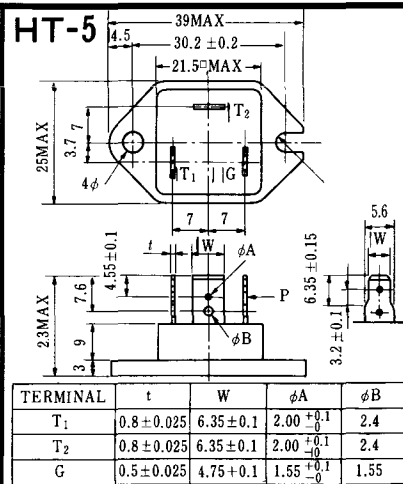

《寸法図単位：mm》


M-1




M-2




M-3

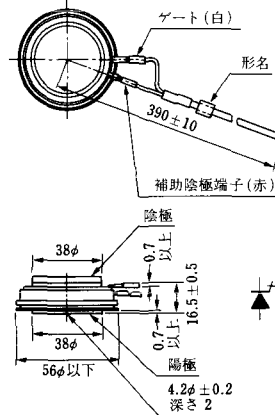

M-4

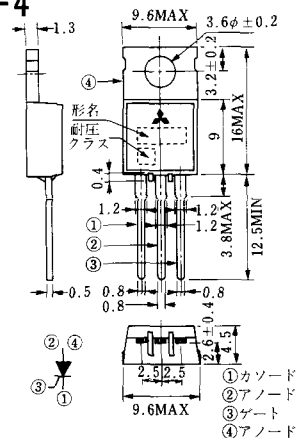


M-5

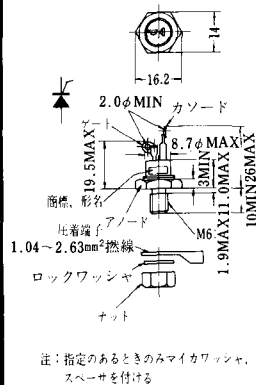


M-6



M-7

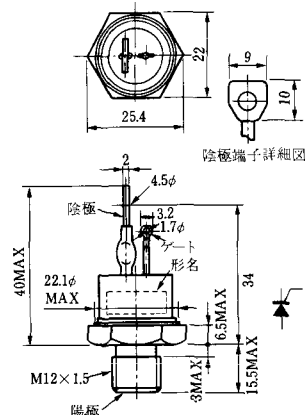

M-8

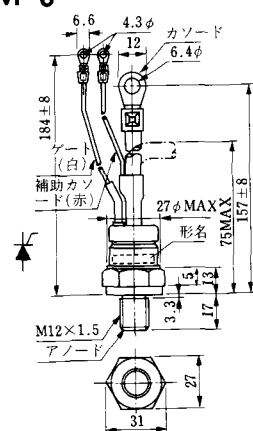


M-9



M-10



M-11

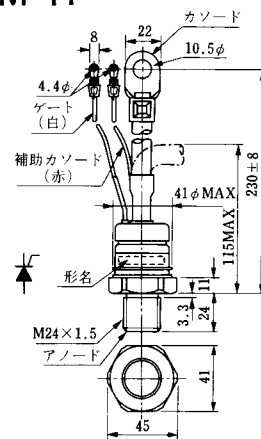

M-12




M-13



M-14



M-15

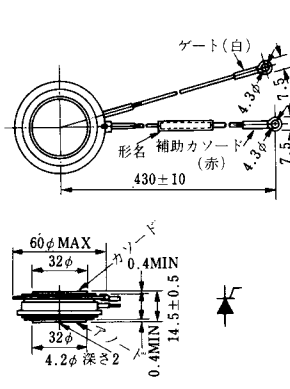

M-16



M-17




M-18




M-19




M-20

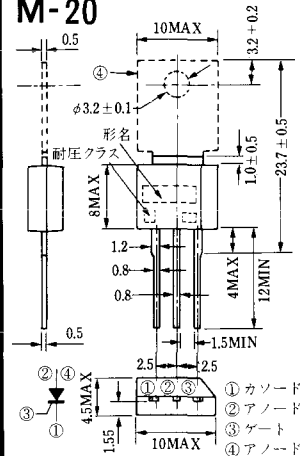


M-21

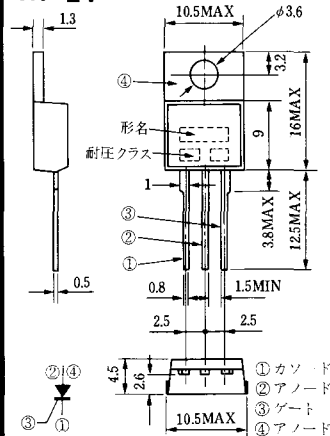


M-22

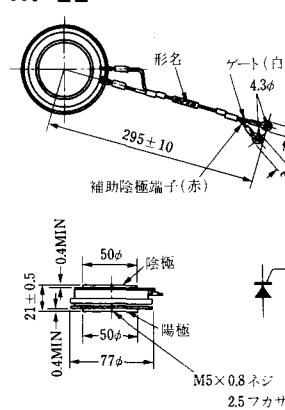

M-23

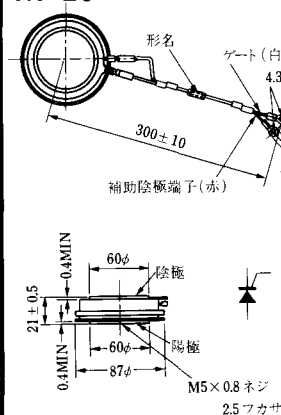

M-24

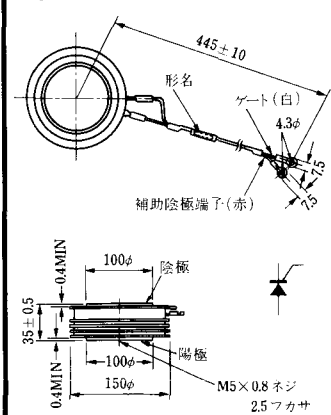

M-25



M-26



M-27



M-28



M-29



M-30




M-31




M-32



M-33

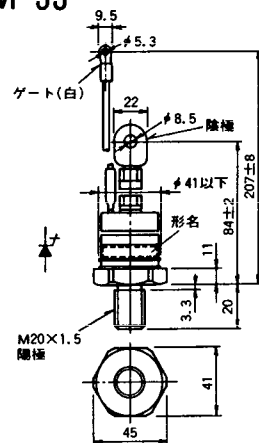

M-34

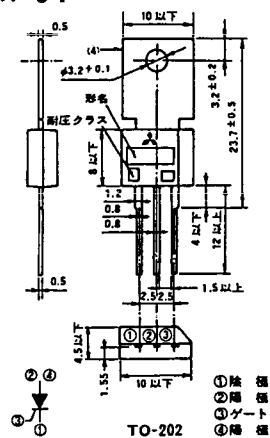


MT-1




JEDC: TO-92

MT-2

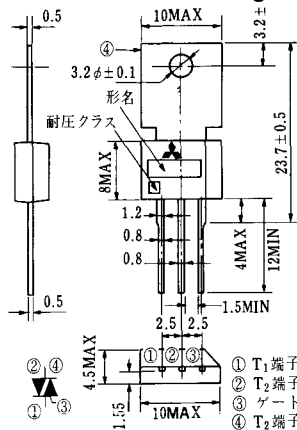


MT-3

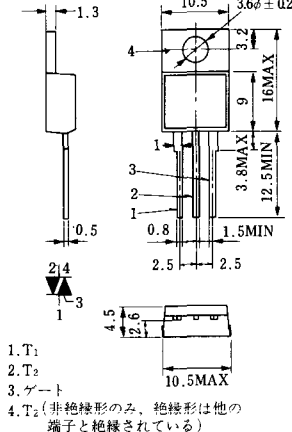


1. T₁
2. T₂
3. ゲート
4. T₂ (非絶縁形のみ、絶縁形は他の端子と絶縁されている)


MT-4

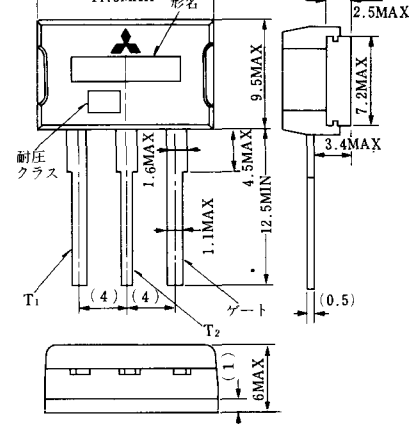


MT-5

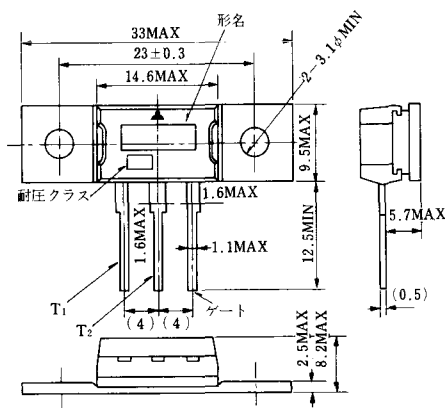

MT-6

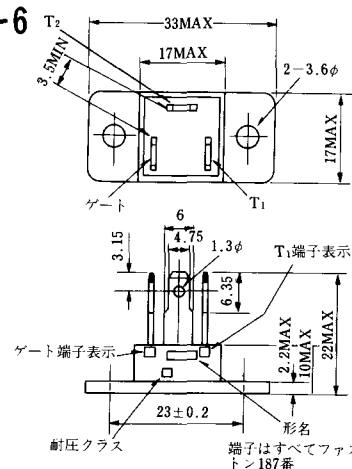


MT-7

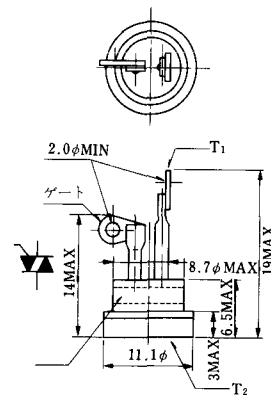


MT-8




MT-9

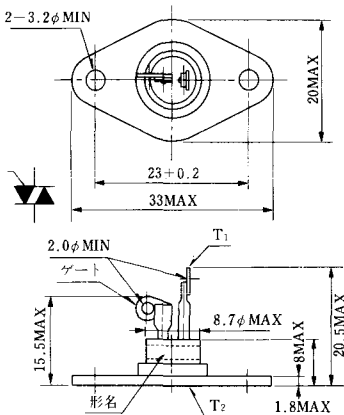


MT-10

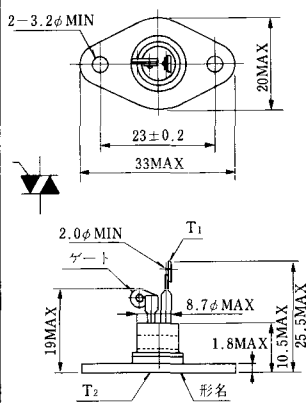


MT-11

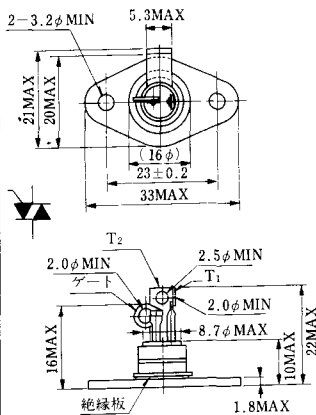


MT-12

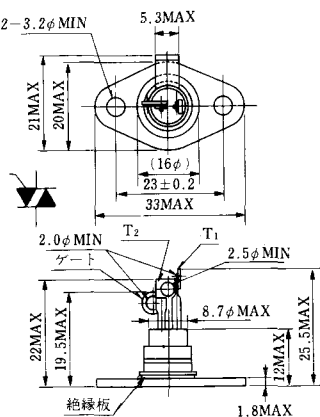


MT-13

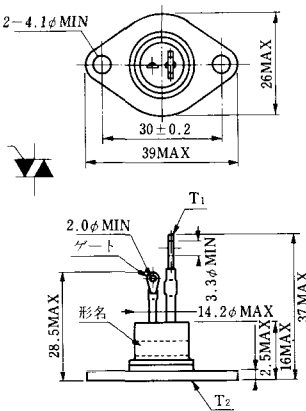

MT-14

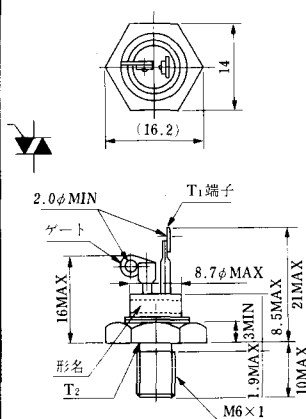

MT-15

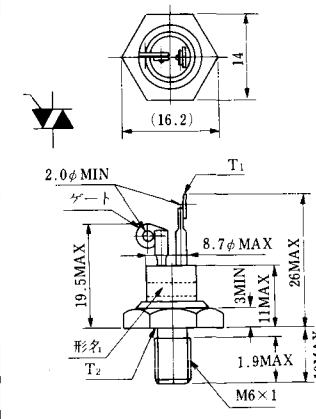

MT-16



MT-17




MT-18




MT-19




MT-20

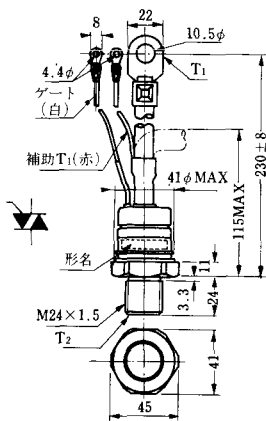

MT-21

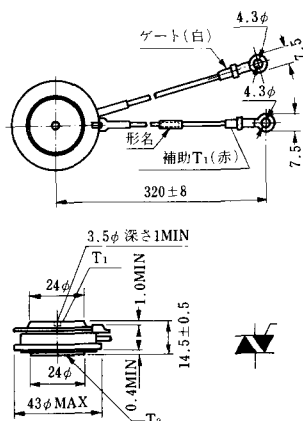

MT-22

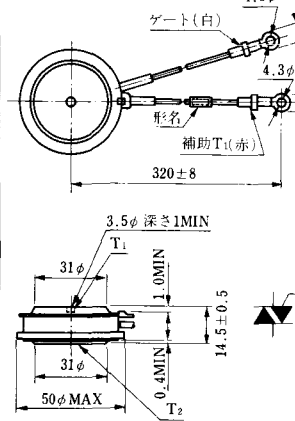

MT-23



MT-24



TO - 3P


- ① T1 端子
- ② T2 端子
- ③ ゲート 端子
- ④ T2 端子

N-1




電極接続
① カソード
② ゲート
③ アノード

N-2




電極接続
① ヤート
② アノード
③ カソード

N-3

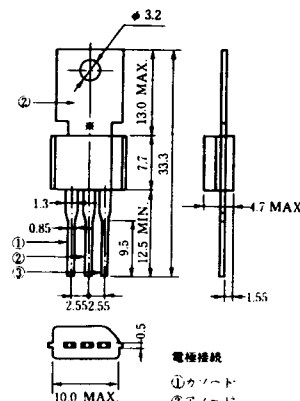


電極接続
① カソード
② アノード
③ ゲート

N-4

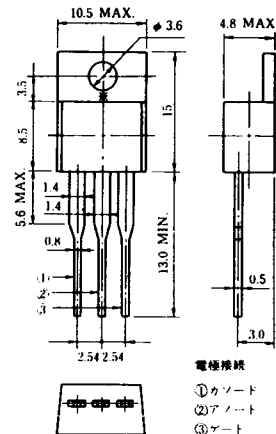


電極接続
① カソード
② アノード
③ ゲート

N-5

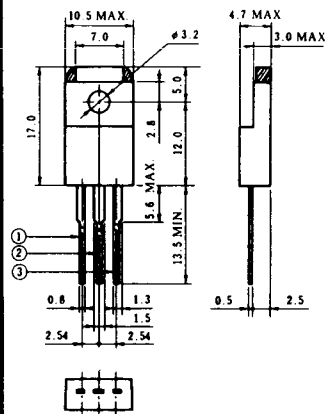


N-6

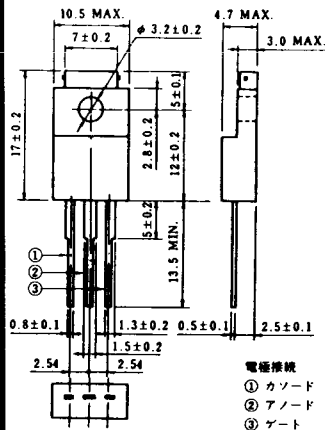


電極接続
① カソード
② アノード
③ ゲート

N-7

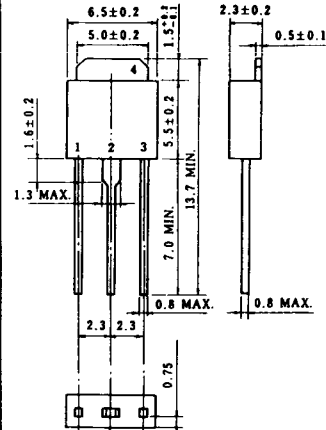

N-8

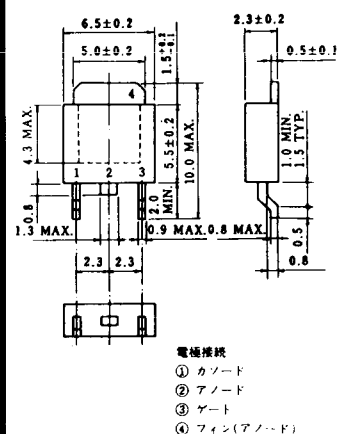

電極接続
① カソード
② アノード
③ ゲート
④ フィン(アノード)

N-9



電極接続

K : カソード

A : アノード

G : ゲート

NA-1



電極接続

1. ゲート
2. アノード
3. カソード

JEDEC: TO-92

NA-2




電極接続

1. カソード
2. アノード
3. ゲート


JEDEC: TO-202AA

NI-1

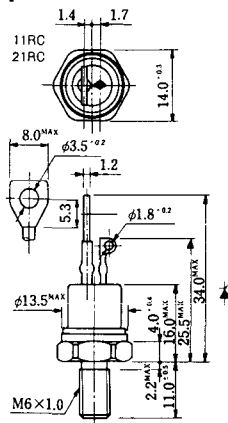


NI-2

29RD




NI-3

39RC
59RC
39RF
59RF

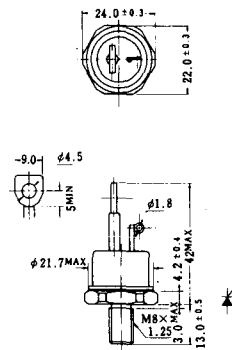


NI-4

68RP, 88RP, 108RP, 68RS,
88RS, 78RT, 88RLD, 88RLE,
88RLF, 88RLG, 88RLH, 108RLE




NI-5

158RP, 208RP, 128RS, 178RS,
158RT, 178RLD, 178RLE,
178RLF, 178RLG, 178RLH,
208RLE




NI-6

308RP, 408RP, 508RP, 278RS,
358RS, 258RT, 258RLD, 258RLG,
258RLH, 308RLE, 308RLF,
358RLE




NI-7

89RW $\frac{1}{2}$ L
129RW $\frac{1}{2}$ L

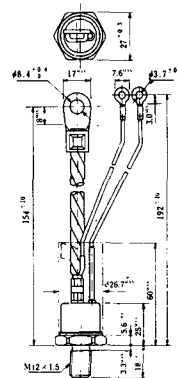

NI-8

89RW
129RW

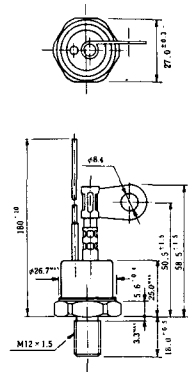


NI-16

503PLF
503PLH




NI-17

3003PA




NI-18

353PGA「E




NI-19

603PGA, 603PGA「A, 803PGA




NI-20

603PGA「E




NI-21

1001PGB「E




NI-22

1201PGA, 1201PGA「A, 1401PGA



NI-23

1201PGA「E



NI-24

2001PGB[®] JE



NI-25

NI-26

NT-1



電極接続
①T₁
②ゲート
③T₂

NT-2



電極接続
①T₁
②ゲート
③T₂

NT-3




電極接続
①T₁
②T₂
③ゲート

NT-4




電極接続
①T₁
②T₂
③G

NT-5

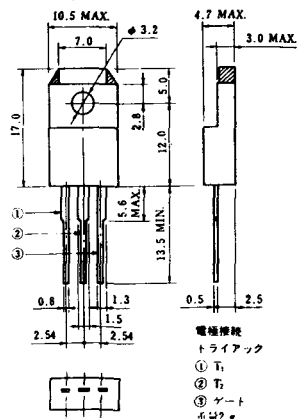


電極接続
トライアック
①T₁
②T₂
③ゲート
④2g

NT-6

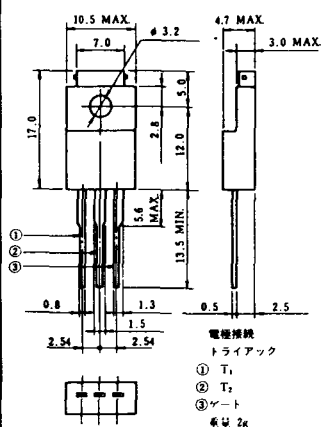


電極接続
トライアック
①T₁
②T₂
③ゲート
④2k

NT-7

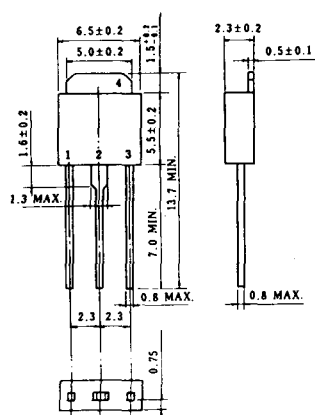

NT-8

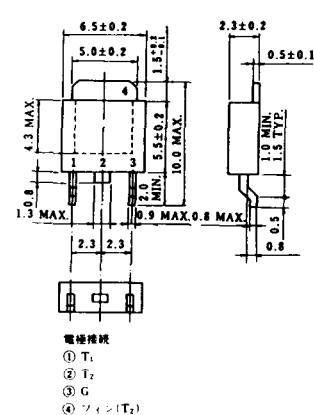

電極接続
①T₁
②T₂
③G
④フィ(T₂)

S-1




ST-1




SA-1




SA-2

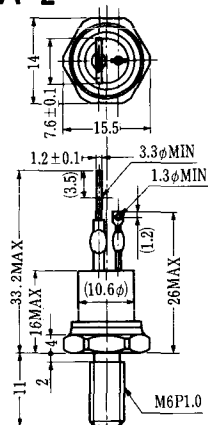


SA-3

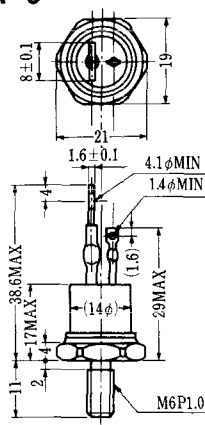


SA-4

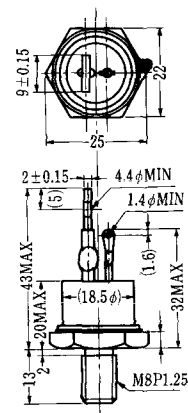


SA-5

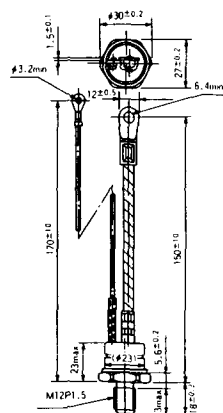

SA-6

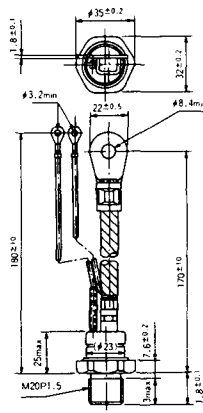


SA-7

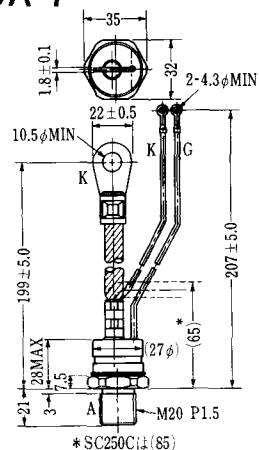


* SC250C (1/85)

SA-8

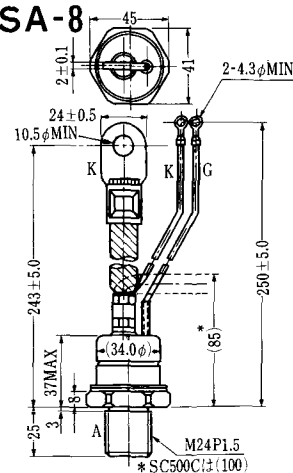


* SC500C (1/100)


SA-9

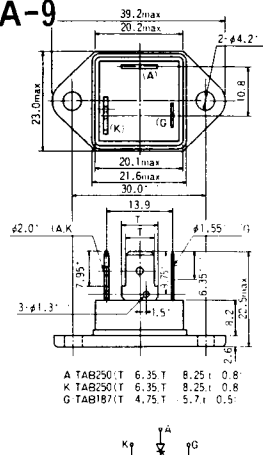


SA-10

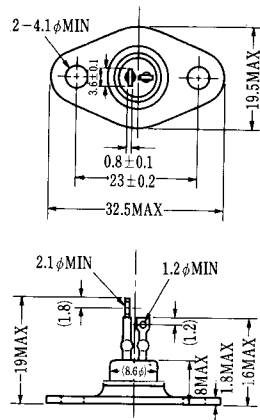


SA-11

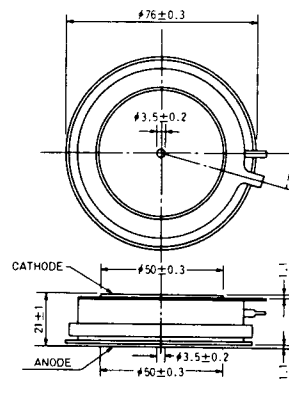

SA-12

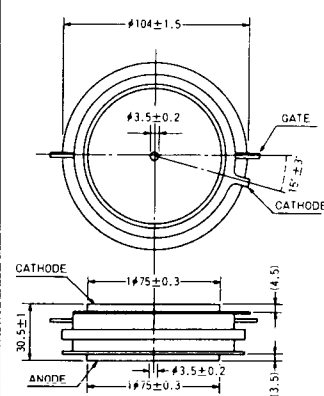

SAT-1

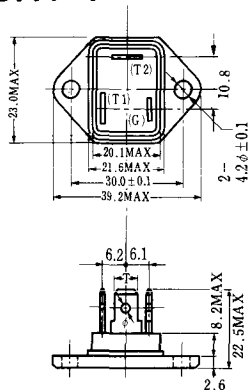


T1端子:ファストン250($T=6.35$, $t=0.8$, $\phi=1.65$)
T2端子:ファストン250($T=6.35$, $t=0.8$, $\phi=1.65$)
G端子:ファストン187($T=4.75$, $t=0.5$, $\phi=1.3$)

SAT-2



SAT-3

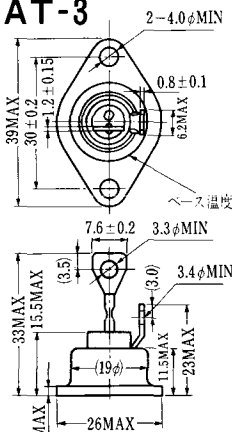

SAT-4



SAT-5



SAT-6




SAT-7



SAT-8




SAT-9.

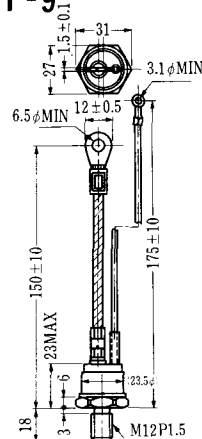

SAT-10



SAT-11

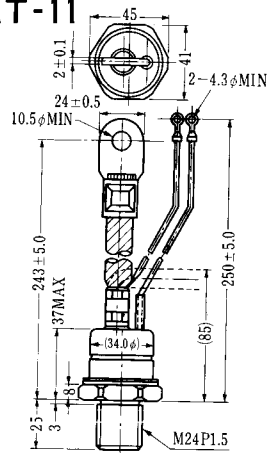

SY-1(1096A)



SY-2(1151)



SY-3(1104)



SY-4(1150)



1097A



G: Gate

1102




1141




1142



1144

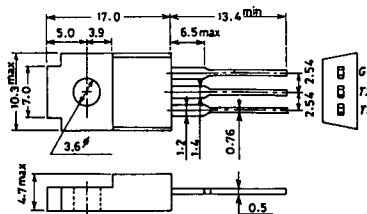

1155

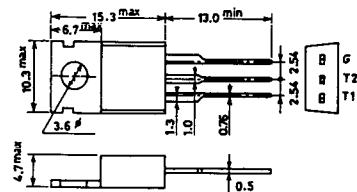

1192A




G: Gate


T-1 (13-5A1A)



T-2 (13-8A1A)

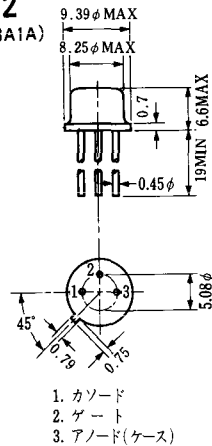

T-3 (13-8C1A)

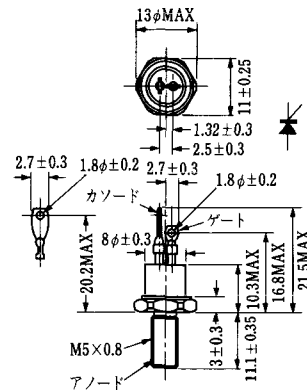


T-4 (13-10A1A)



T-5 (13-10B1A)




T-6 (13-11D1A)

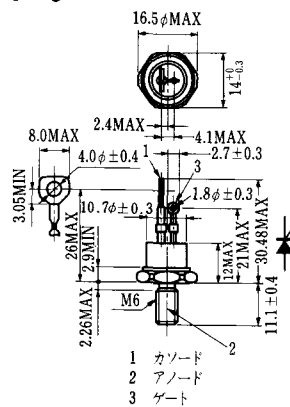


T-7 (13-13A1A)




T-8 (13-13B1A)

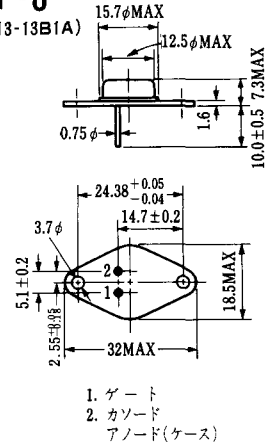


T-9 (13-14A1A)

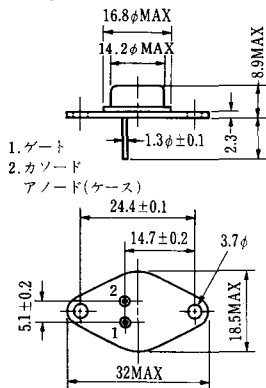


T-10 (13-19A1A)

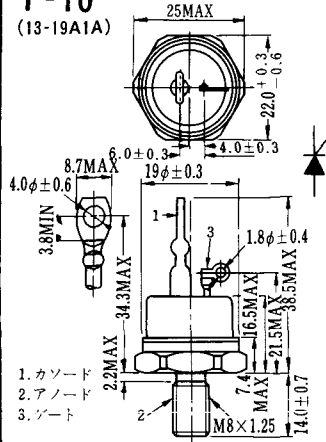


T-11 (13-21B1A)

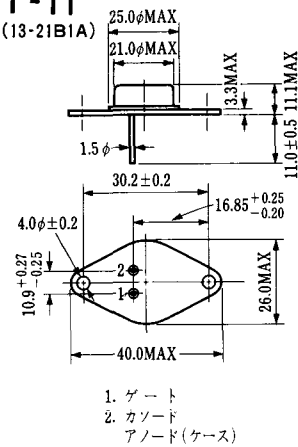


T-12 (13-27B1B)

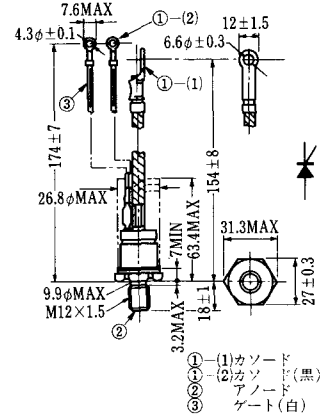


T-13 (13-27C1A)

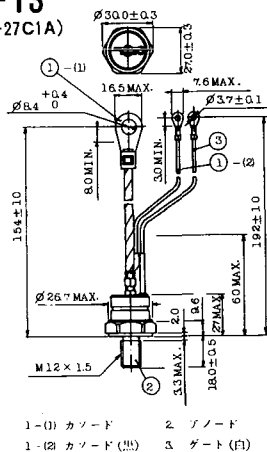


T-14 (13-32A1A)

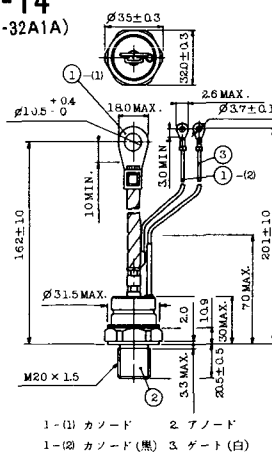

T-15 (13-35C1B)

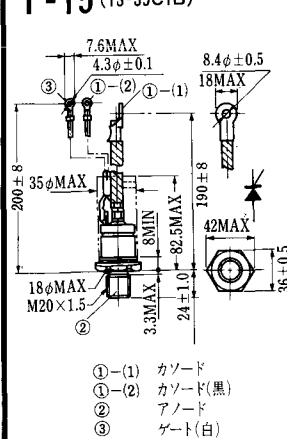


T-16 (13-40B1A)

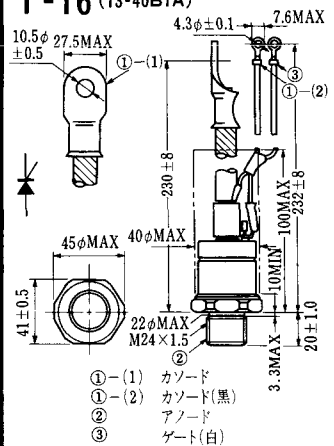


T-17 (13-42A1A)



T-18 (13-45D1A)

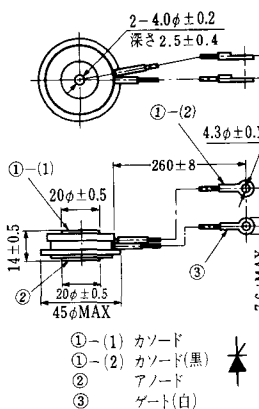

T-19 (13-52B1A)

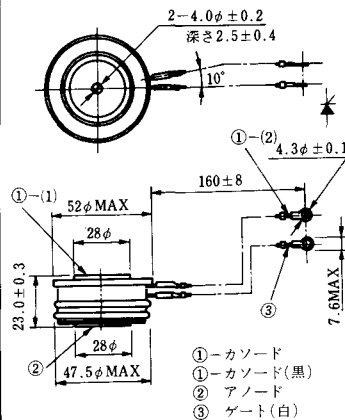


T-20 (13-52C1A)




T-21 (13-60A1A)




T-22 (13-70C1A)

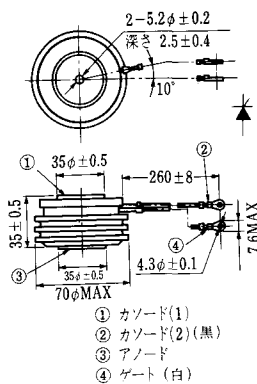

T-23 (13-78A1A)

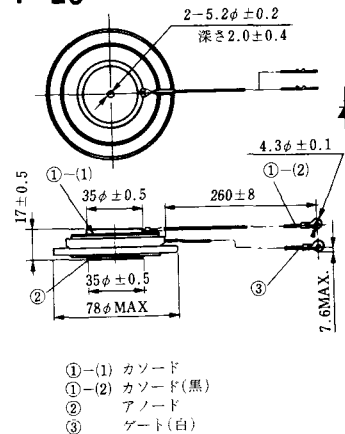

T-24 (13-100C1A)

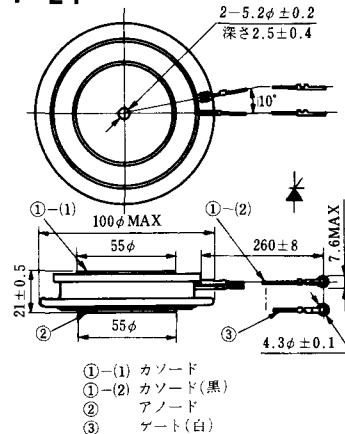

T-25 (13-120A2A)




T-26 (13-150A1A)




T-27 (13-37A1A)




T-28 (13-45E1A)

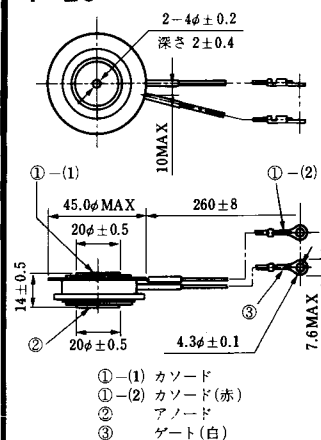


T-29 (13-51A1A)

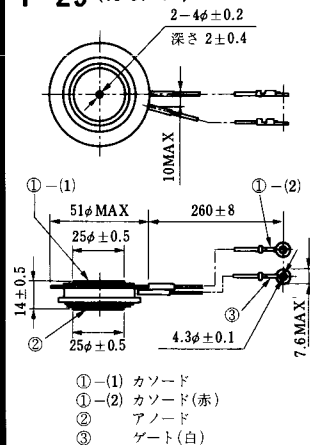


T-30 (13-57A1A)

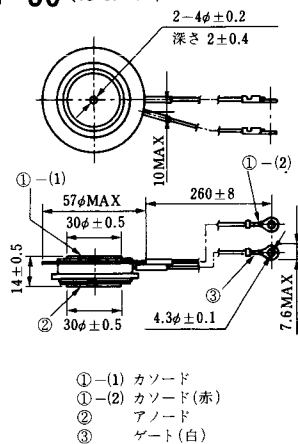


T-31 (13-100E1A)

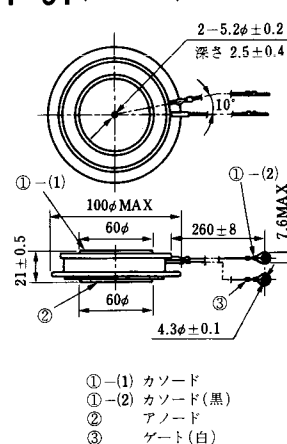

T-32 (13-60E3A)

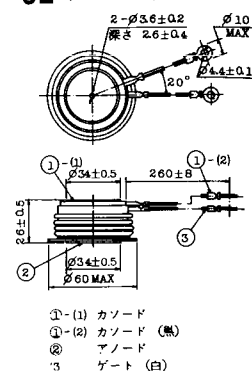


T-33 (13-78B1A)




- ① カソード
② アノード
③ ゲート

T-34 (13-66A1A)

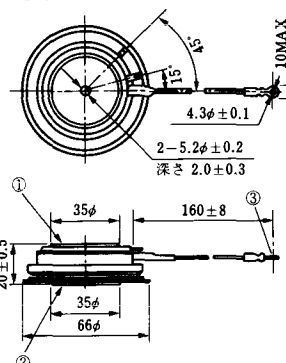


- ① カソード
② アノード
③ ゲート

T-35 (13-100D1A)

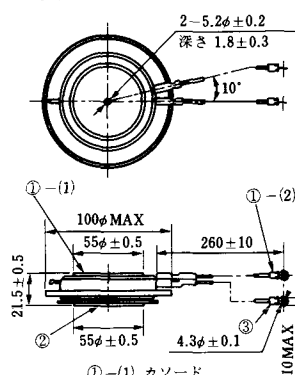


- ①-(1) カソード
①-(2) カソード(黒)
② アノード
③ ゲート(白)

T-36 (13-120E1A)

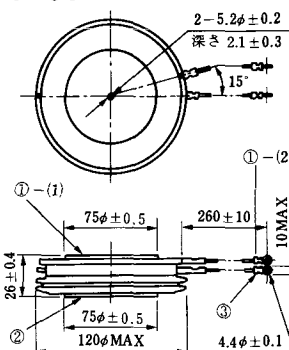


- ①-(1) カソード
①-(2) カソード(黒)
② アノード
③ ゲート(白)

T-37 (13-120A1A)




- ①-(1) カソード
①-(2) カソード(黒)
② アノード
③ ゲート(白)

T-38 (13-120C1A)




- ① カソード
② アノード
③ ゲート

T-39 (13-80B1A)



- ①-(1) カソード
①-(2) カソード(黒)
② アノード
③ ゲート(白)

T-40 (13-28A1A)

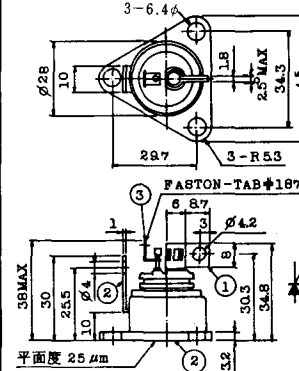

1. カソード
2. アノード
3. ゲート


T-41 (13-28A2A)




T-42 (13-45F1A)



T-43 (13-60E2A)

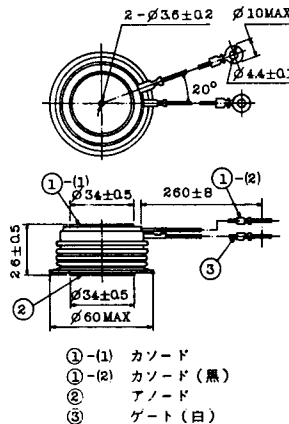

T-44 (13-36A1A)

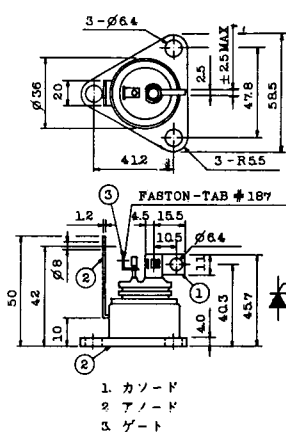


T-45 (13-51B1A)




T-46 (13-36B1A)




T-47 (13-60E1A)

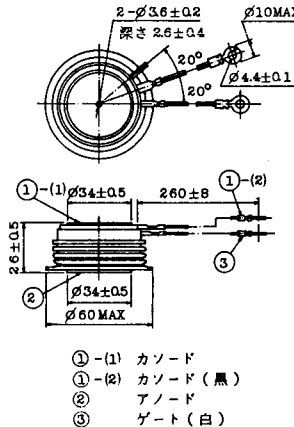

T-48 (13-93C1A)

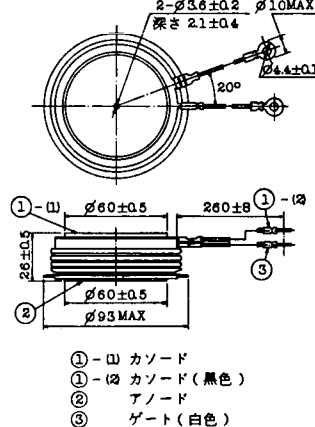


TT-1




1. ゲート
2. T₂
3. T₁

TT-2




1. T₁
2. ゲート
3. T₂

TT-3




1. T₁
2. T₂
3. ゲート

TT-4




1. T₁
2. T₂
3. ゲート

TT-5




1. T₁
2. T₂
3. ゲート

TT-6




1. T₁
2. T₂ (放熱板)
3. ゲート

TT-7



1. T₁
2. T₂
3. ゲート

TT-8



1. ゲート
2. T₁
- T₂ (ケース)

TT-9




1. ゲート
2. T₁
3. T₂ (ケース)

TT-10



1. ゲート
2. T₁
3. T₂ (ケース)

TT-11



1. ゲート (ファストン端子 #187)
2. T₁ (" #250)
3. T₂ (" #250)


TT-12



ゲート端子詳細


- ① ゲート (ファストン端子 #187)
- ② T₁ (" #250)
- ③ T₂ (" #250)

TT-13

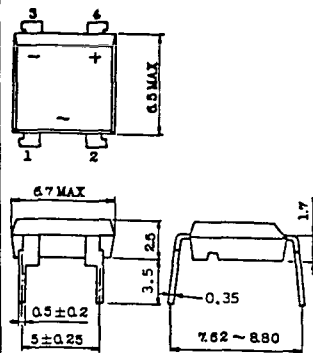


- 1, 2: T₂
- 3: GATE
- 4: T₁

TT-14

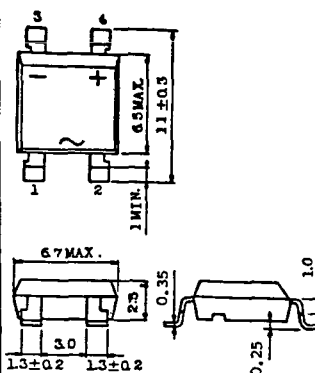


- 1, 2: T₂
- 3: GATE
- 4: T₁

TT-15 (13-14A1B)



1. ゲート
2. T₁
- T₂ (ケース)

TT-16 (13-16A1A)




1. T₁
2. T₂
3. ゲート


TS-1




TS-2

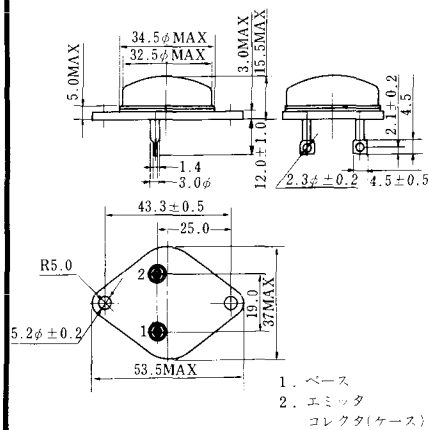

TS-3

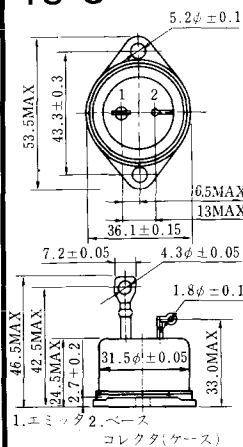


TS-4

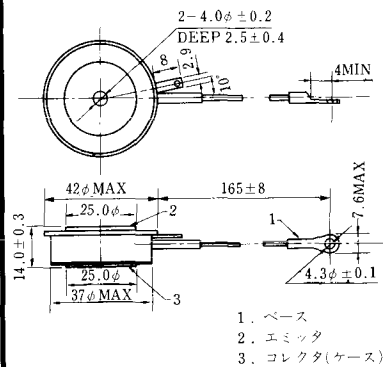


TS-5








TS-6

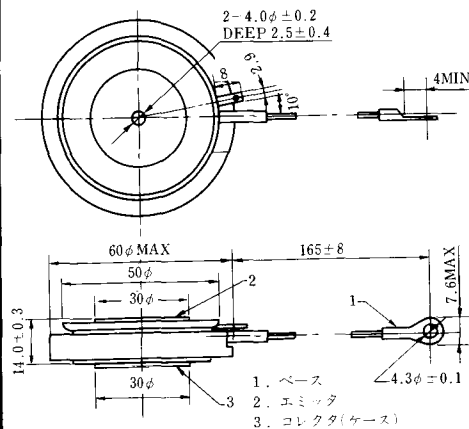

TS-7

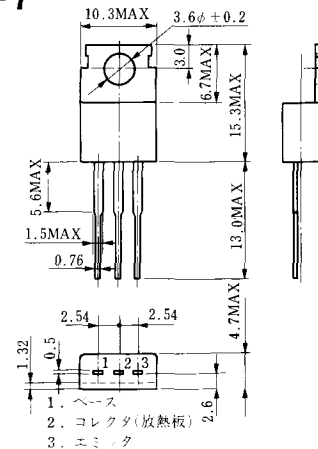




S-108B1A



S-108B1B



S-108B1C

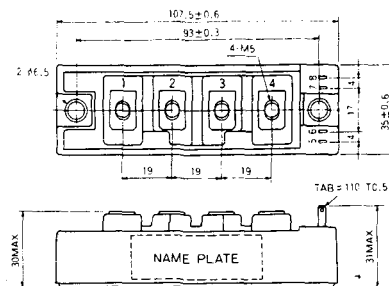

S-108B2A



S-108B2B



2-22B1A



2-27A4A




2-33C1A



2-33D1A



2-33F1A

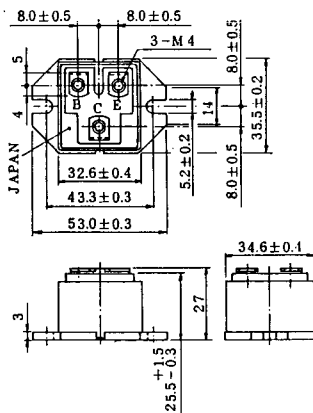

2-37A1A



2-48A3A



2-48A3B



2-48A4A




2-64A2A




2-64A2B




2-68A2A

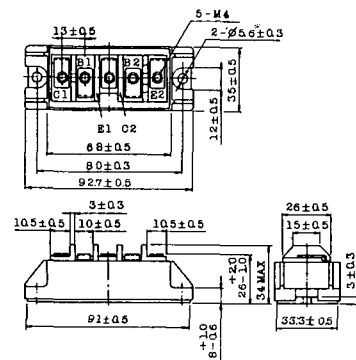


2-80C1A

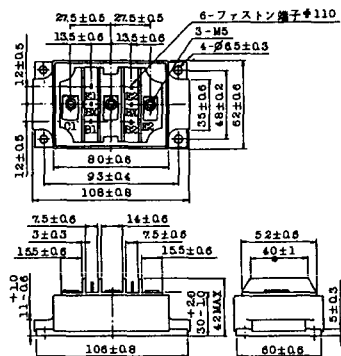


2-80D2A

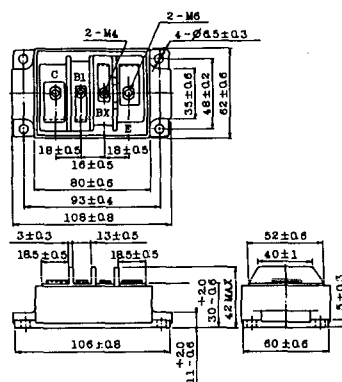


2-94A2A

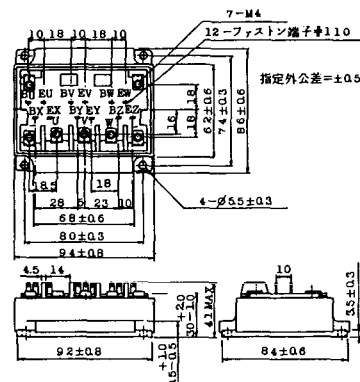


2-94B1A




2-94C2A

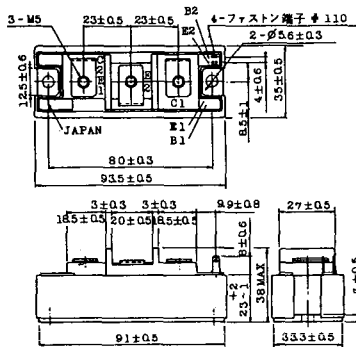


2-94C3A

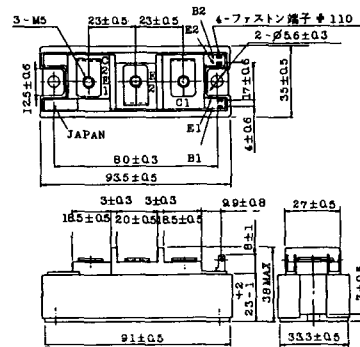


2-94D1A

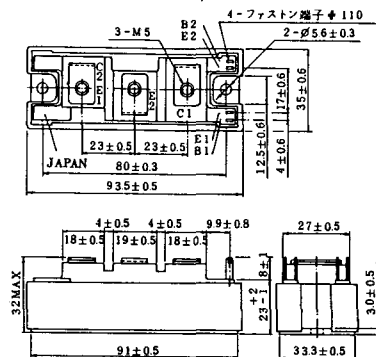


2-96A3A

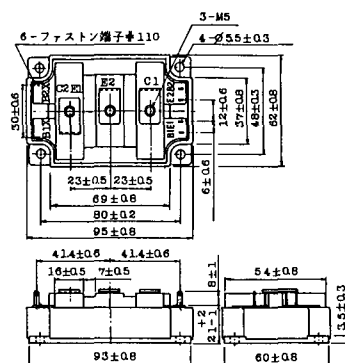


2-96A4A

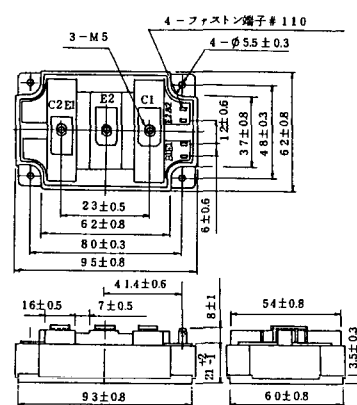


2-98B1A

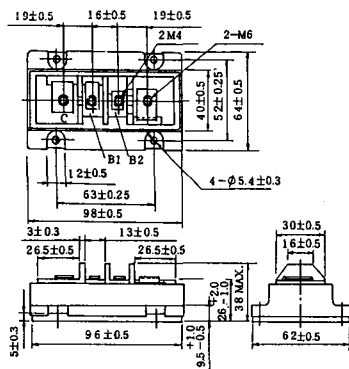

2-98C2A

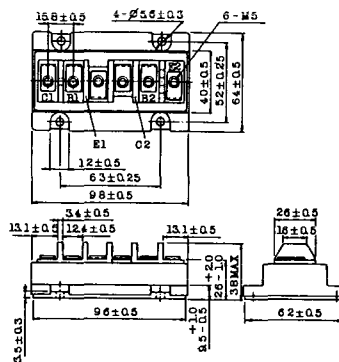

2-108A2A

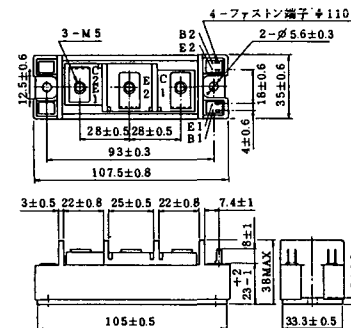

BBT-II

BBTII
1D200A-020



BBT-III

BBTIII
ETN31-055
ETM36-030
ETN36-030
ETN35-030



BBT-III






BBTIII
ETN01-055
ET1257



BBT-IV

BBTIV
1D500A-030



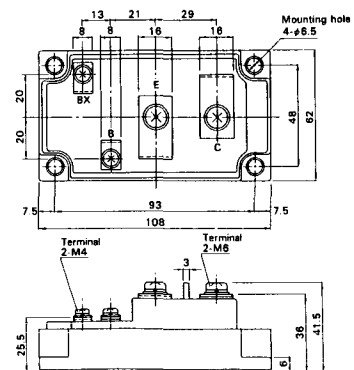

M-107




M-116




M-201




M-202

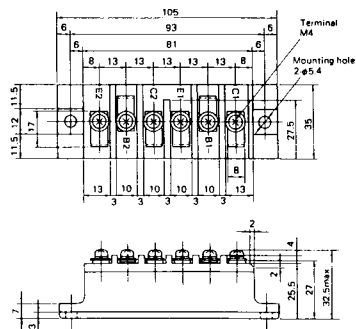


M-203

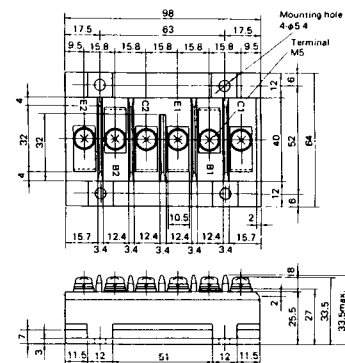


M-204

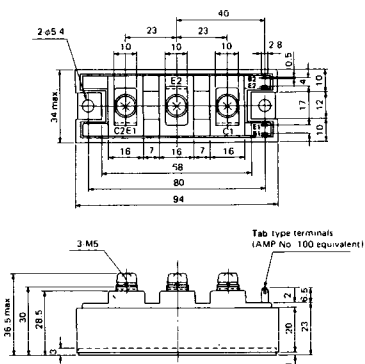

M-205

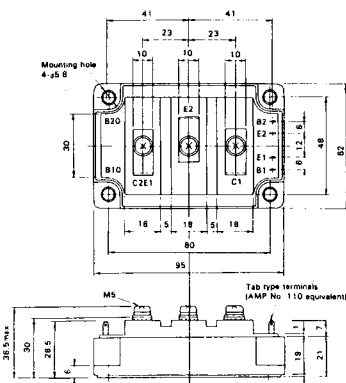


M-206

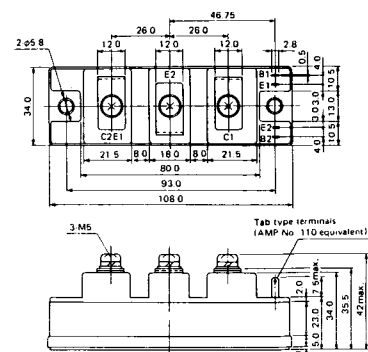


M-207



M-208

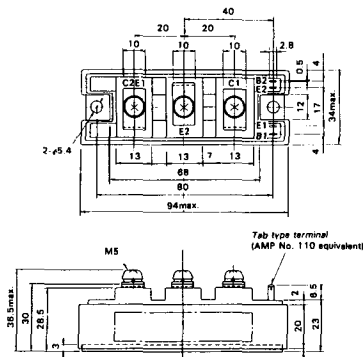

M-209

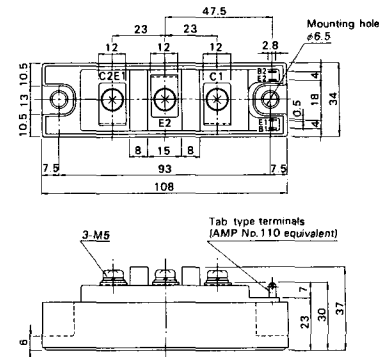


M-210



M-211



M-212



M-213



M-214

M-215



M-216



M-217



M-218



M-601




M-602



M-603



M-604




M-605



M-606



M-607



M-608




M-609




M-610




M-616




M-1A1A




M-2A1A




M-2B1A




M-2B2A



M-2C2A




M-2D4A

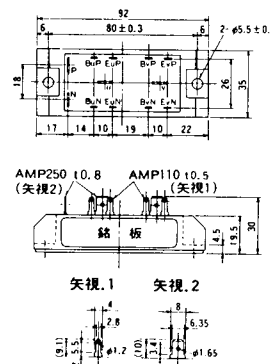

M-2E6A



M-2F6A



M-2G6A




M-3A1A




M-3B1A




M-3B1B

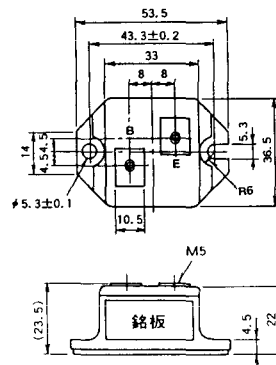


M-3C1A

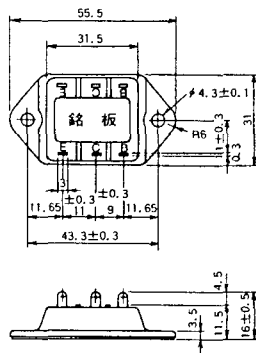

M-3D6A

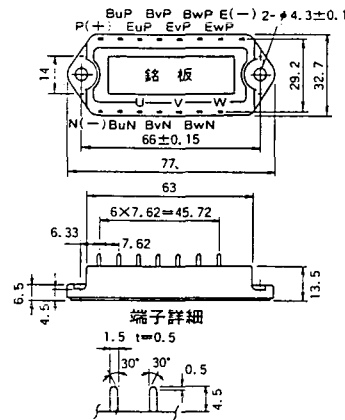


M-3E6A

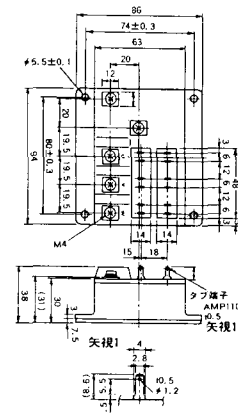


M-4A1A



M-4A2A



M-4A1B




M-4A2B




M-4B2A




M-5A1A




M-5A1B



M-5A2A



M-5B2A




M-5C2A




M-5D2A



M-6A1A

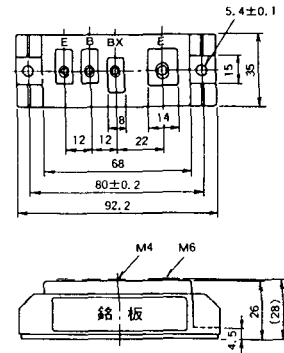

M-7A1A

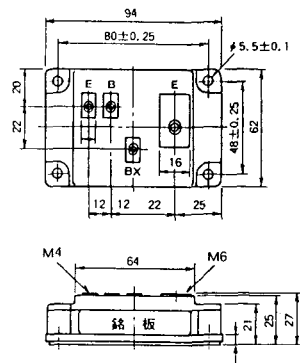

M-7B1A



M-8A1A



M-8A1B



M-8A2A




M-8A2B



M-8B2A



M-9A1A



M-9A2A




M-9B1A




M-9C2A




M-1A1B

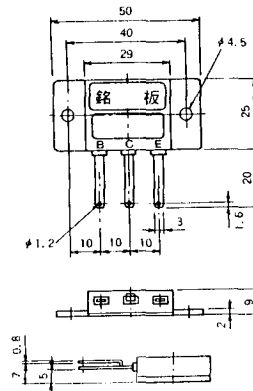


M-1A1C



M-2E6B

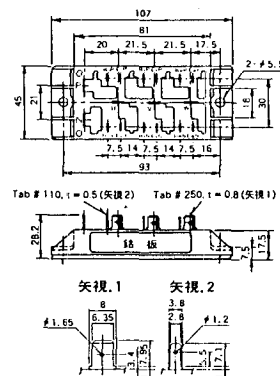


M-2E6C




M-10A2A



M-10A2B




M-11A2A

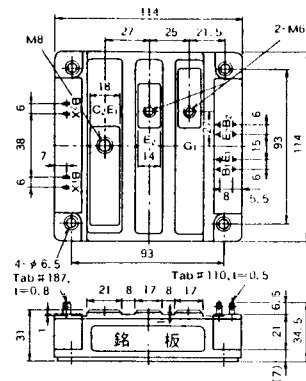


M-12A6A



M-12B6A



M-12B6B

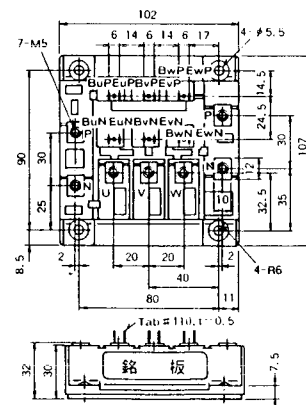

M-4A2D



M-4A2E




M-4C2A




M-4C2B



M-9B1C

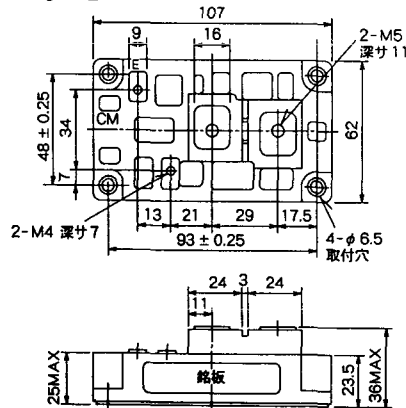

M-9D2A

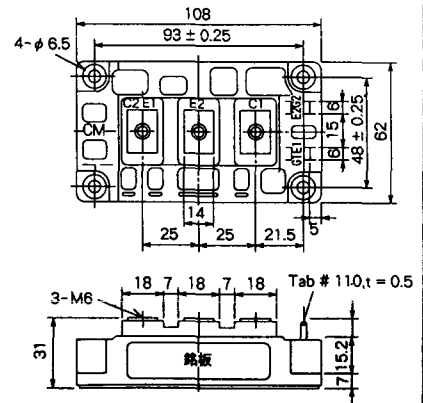

M-9D2B



M-10A2C



H-101



Weight :480g

TERMINALS


H-201



H-202



LF-J

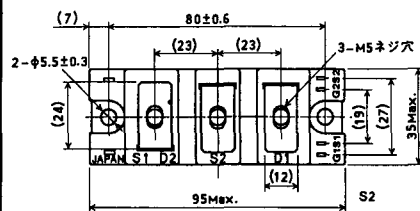


LF-K




U-1




U-2

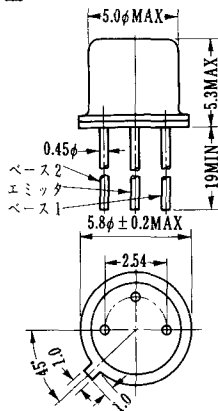


U-3

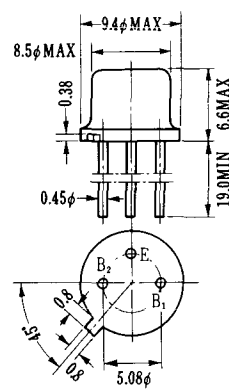

U-4

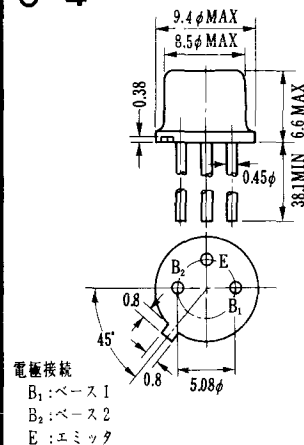


U-5

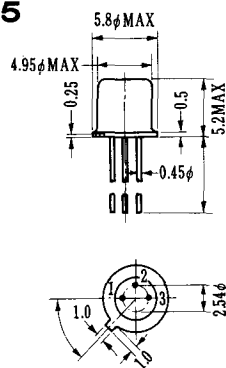


1. BASE 1
2. EMITTER
3. BASE 2 (CASE)

U-6

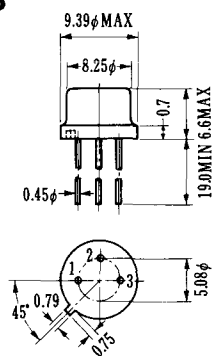

1. BASE (2)
2. EMITTER
3. BASE (1)

U-7

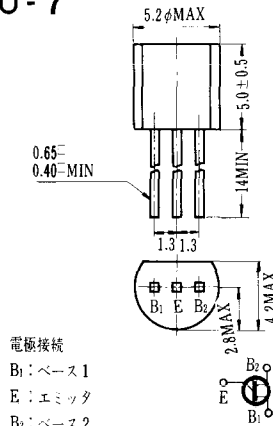

U-8

