


PIM/Built-in converter with thyristor and brake (S series) 600V / 30A / PIM

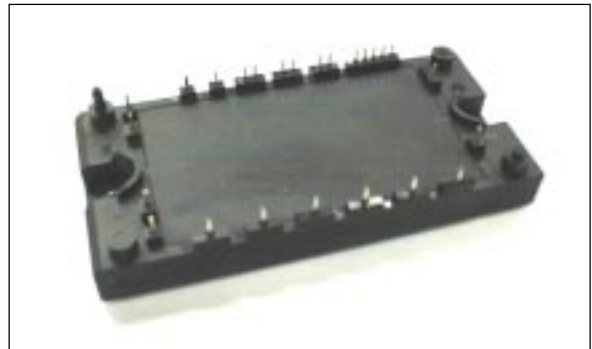

■ Features

- Low $V_{CE(sat)}$
- Compact Package
- P.C. Board Mount Module
- Converter Diode Bridge Dynamic Brake Circuit

■ Applications

- Inverter for Motor Drive
- AC and DC Servo Drive Amplifier
- Uninterruptible Power Supply

■ Maximum ratings and characteristics

● Absolute maximum ratings ($T_c=25^\circ\text{C}$ unless without specified)

Item	Symbol	Condition	Rating	Unit	
Inverter	Collector-Emitter voltage	V_{CES}	600	V	
	Gate-Emitter voltage	V_{GES}	± 20	V	
	Collector current	I_C	Continuous	30	A
		I_{CP}	1ms	60	A
		$-I_C$		30	A
Collector power dissipation	P_C	1 device	120	W	
Brake	Collector-Emitter voltage	V_{CES}	600	V	
	Gate-Emitter voltage	V_{GES}	± 20	V	
	Collector current	I_C	Continuous	20	A
		I_{CP}	1ms	40	A
	Collector power dissipation	P_C	1 device	80	W
Thyristor	Repetitive peak reverse voltage(Diode)	V_{RRM}	600	V	
	Repetitive peak off-state voltage	V_{DRM}	800	V	
	Repetitive peak reverse voltage	V_{RRM}	800	V	
	Average on-state current	$I_{T(AV)}$	50Hz/60Hz sine wave	30	A
	Surge On-state current (Non-Repetitive)	I_{TSM}	$T_j=125^\circ\text{C}$, 10ms half sine wave	275	A
	Junction temperature	T_{jw}		125	$^\circ\text{C}$
Converter	Repetitive peak reverse voltage	V_{RRM}	800	V	
	Average output current	I_o	50Hz/60Hz sine wave	30	A
	Surge current (Non-Repetitive)	I_{FSM}	$T_j=150^\circ\text{C}$, 10ms	210	A
	I^2t (Non-Repetitive)	I^2t	half sine wave	221	A^2s
Junction temperature (except Thyristor)	T_j		+150	$^\circ\text{C}$	
Storage temperature	T_{stg}		-40 to +125	$^\circ\text{C}$	
Isolation between terminal and copper base *2 voltage between thermistor and others *3	V_{iso}	AC : 1 minute	AC 2500	V	
			AC 2500	V	
Mounting screw torque			1.7 *1	Nm	

*1 Recommendable value : 1.3 to 1.7 N·m (M4)

*2 All terminals should be connected together when isolation test will be done.

*3 Terminal 8 and 9 should be connected together. Terminal 1 to 7 and 10 to 26 should be connected together and shorted to copper base.

● Electrical characteristics (T_j=25°C unless otherwise specified)







Item	Symbol	Condition	Characteristics			Unit		
			Min.	Typ.	Max.			
Inverter	Zero gate voltage collector current	ICES	V _{CE} =600V, V _{GE} =0V		75	μA		
	Gate-Emitter leakage current	IGES	V _{CE} =0V, V _{GE} =±20V		200	nA		
	Gate-Emitter threshold voltage	V _{GE(th)}	V _{CE} =20V, I _c =30mA		5.5	7.8	8.5	V
	Collector-Emitter saturation voltage	V _{CE(sat)}	V _{GE} =15V, I _c =30A	chip	1.8		V	
				terminal	1.95	2.4		
	Input capacitance	C _{ies}	V _{GE} =0V, V _{CE} =10V, f=1MHz		3000		pF	
	Turn-on time	t _{on}	V _{CC} =300V I _c =30A		0.45	1.2	μs	
					0.25	0.6		
	Turn-off	t _{off}	V _{GE} =±15V R _G =82Ω		0.40	1.0		
					0.05	0.35		
Forward on voltage	V _F	I _F =30A	chip	1.8		V		
			terminal	1.95	2.6			
Reverse recovery time of FRD	t _{rr}	I _F =30A			300	ns		
Brake	Zero gate voltage collector current	ICES	V _{CE} =600V, V _{GE} =0V		75	μA		
	Gate-Emitter leakage current	IGES	V _{CE} =0V, V _{GE} =±20V		200	nA		
	Collector-Emitter saturation voltage	V _{CE(sat)}	I _c =20A, V _{GE} =15V	chip	1.8		V	
				terminal	1.95	2.4		
	Turn-on time	t _{on}	V _{CC} =300V I _c =20A		0.45	1.2	μs	
					0.25	0.6		
	Turn-off time	t _{off}	V _{GE} =±15V R _G =120Ω		0.40	1.0		
					0.05	0.35		
	Reverse current	I _{RRM}	V _R =600V			75	μA	
	off-state current	I _{DM}	V _{DM} =800V			1.0	mA	
Thyristor	Reverse current	I _{RRM}	V _{RM} =800V		1.0	mA		
	Gate trigger current	I _{GT}	V _D =6V, I _T =1A		100	mA		
	Gate trigger voltage	V _{GT}	V _D =6V, I _T =1A		2.5	V		
	On-state voltage	V _{TM}	I _{TM} =30A	chip	1.0	1.2	V	
				terminal	1.1			
Converter	Forward on voltage	V _{FM}	I _F =30A	chip	1.1	V		
				terminal	1.2		1.5	
	Reverse current	I _{RRM}	V _R =800V			75	μA	
Thyristor	Resistance	R	T=25°C	5000		Ω		
			T=100°C	465	495		520	
B value	B	T=25/50°C	3305	3375	3450	K		







● Thermal resistance Characteristics







Item	Symbol	Condition	Characteristics			Unit
			Min.	Typ.	Max.	
Thermal resistance (1 device)	R _{th(j-c)}	Inverter IGBT			1.04	°C/W
		Inverter FWD			2.00	
		Brake IGBT			1.56	
		Thyristor			1.00	
		Converter Diode			1.33	
Contact thermal resistance *	R _{th(c-f)}	With thermal compound		0.05		







* This is the value which is defined mounting on the additional cooling fin with thermal compound

■ Characteristics (Representative)

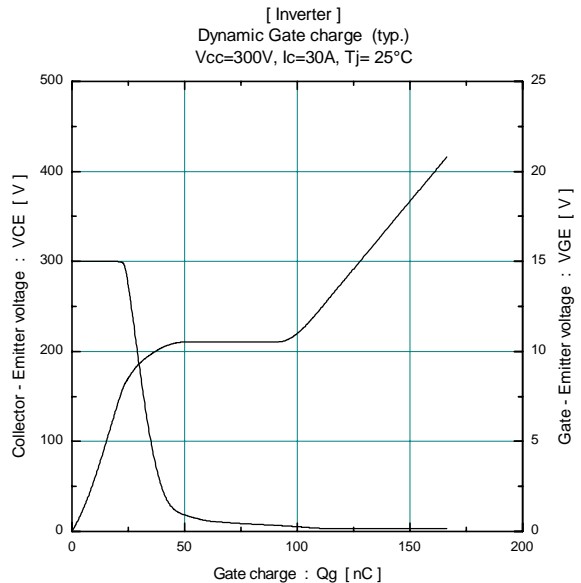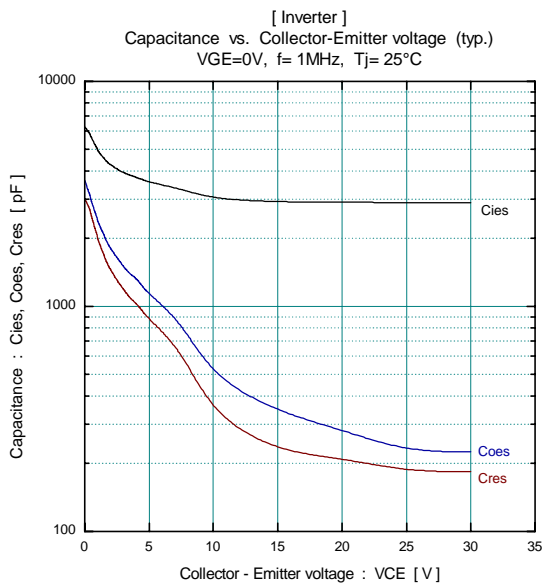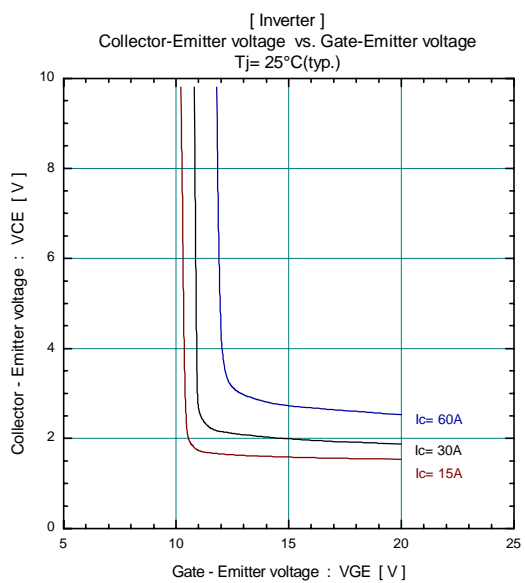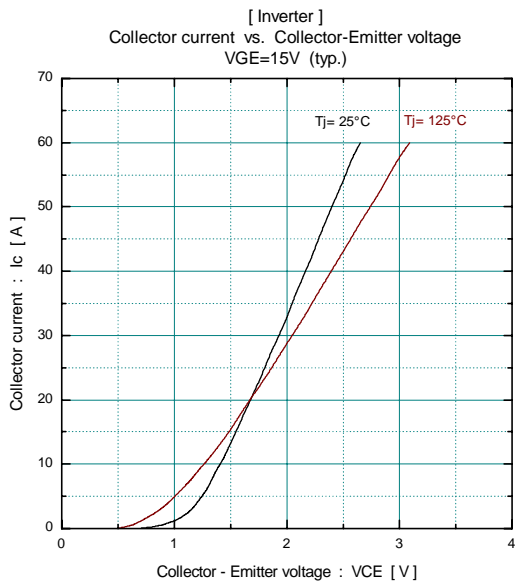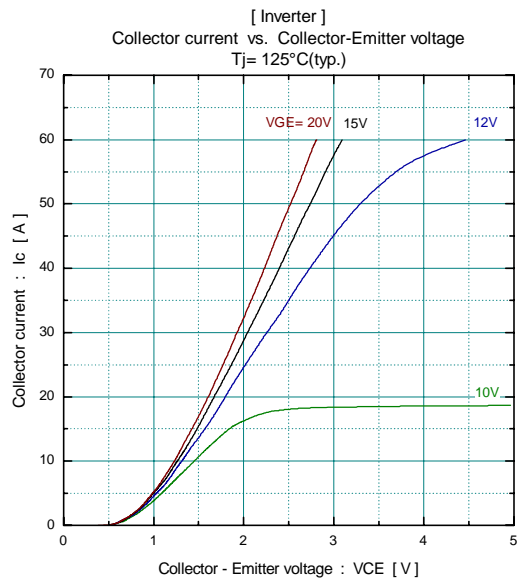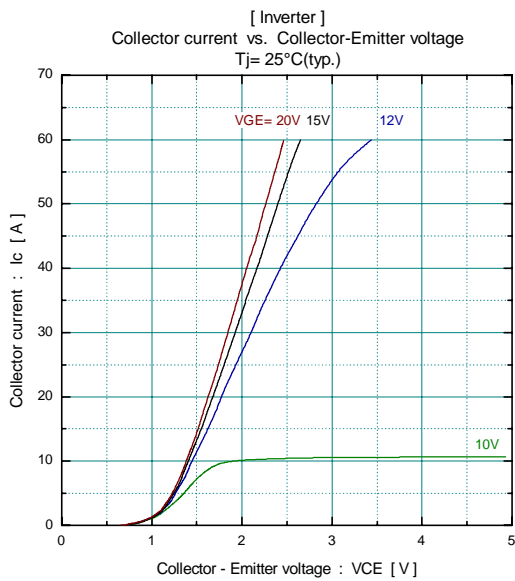


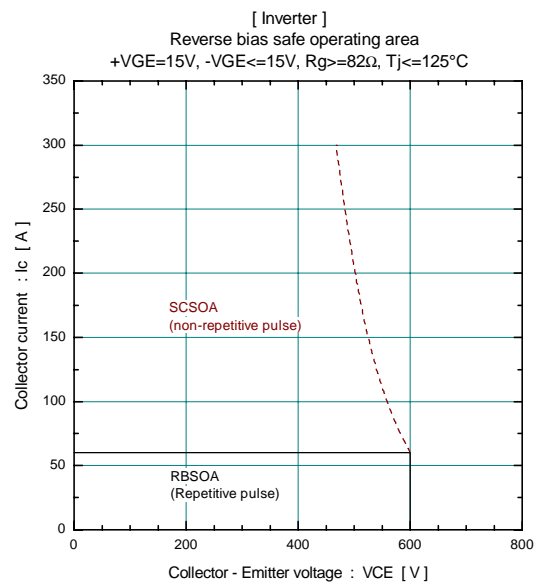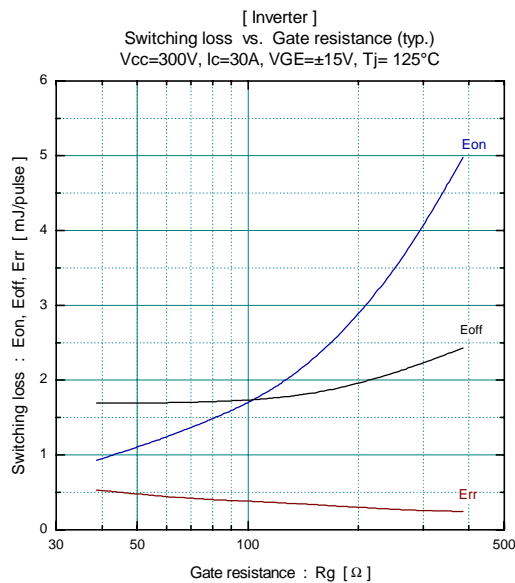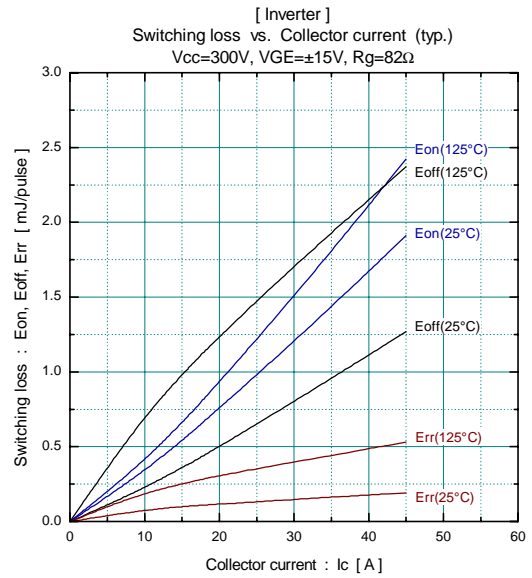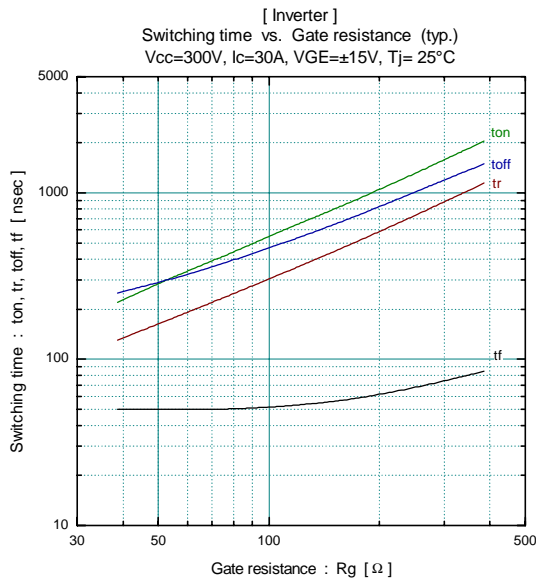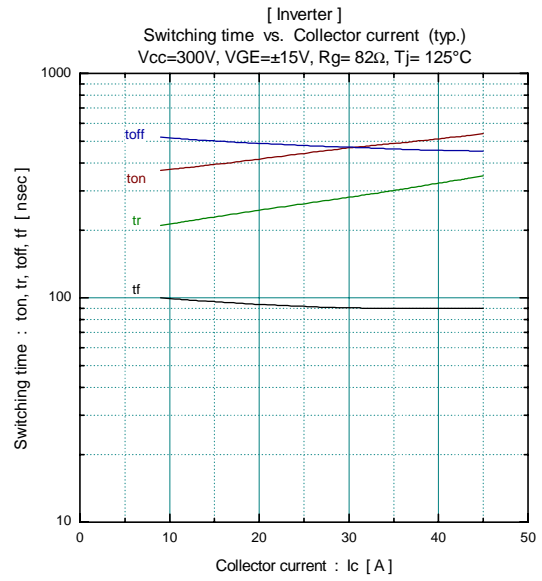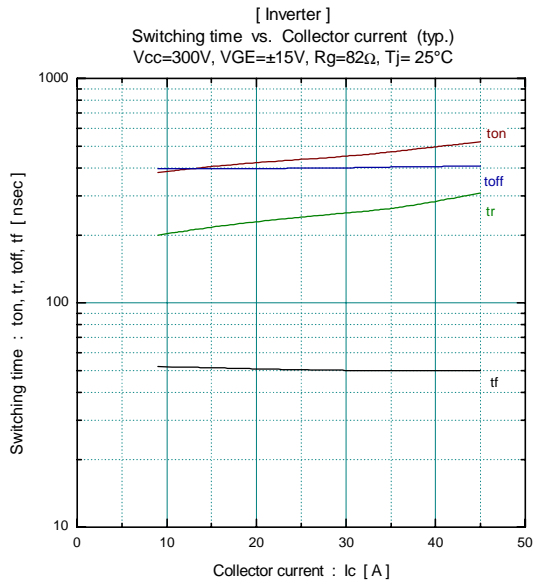

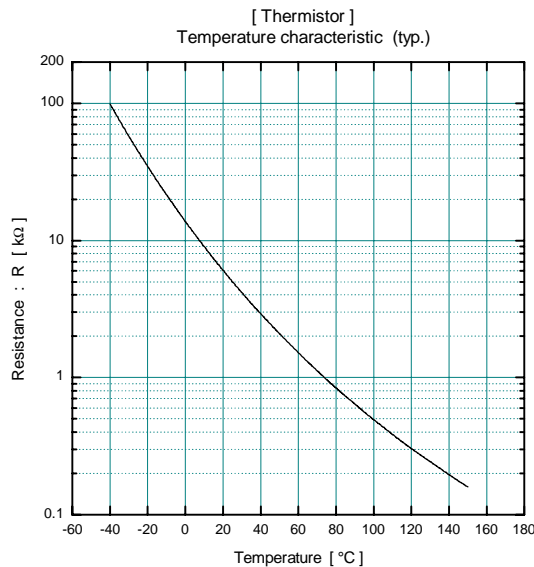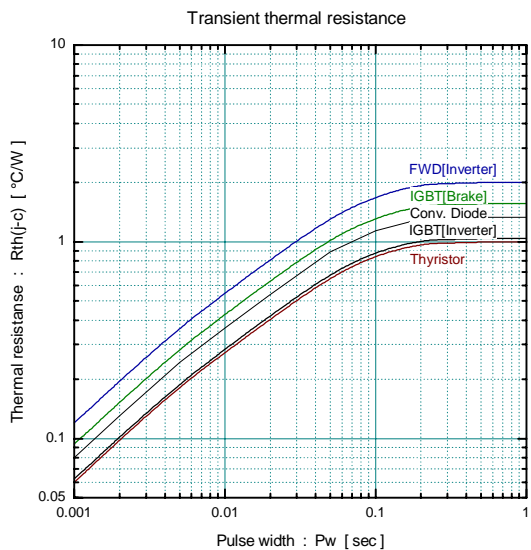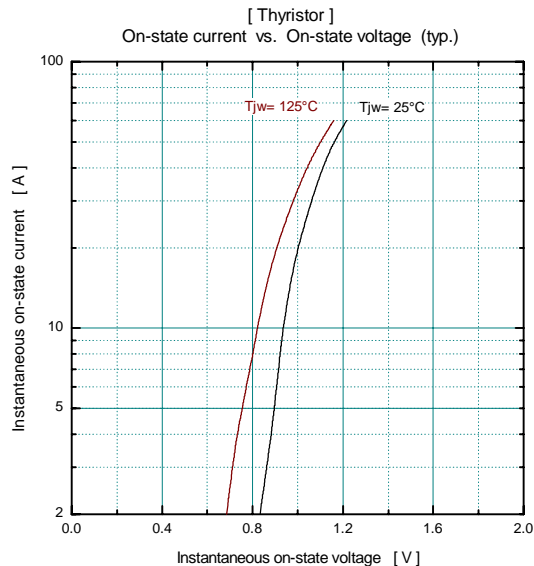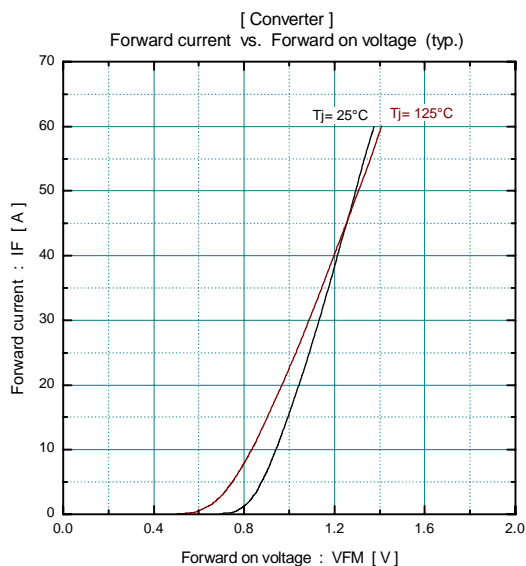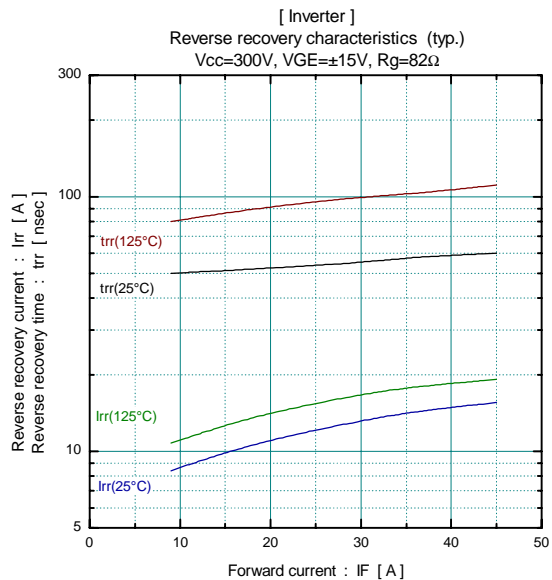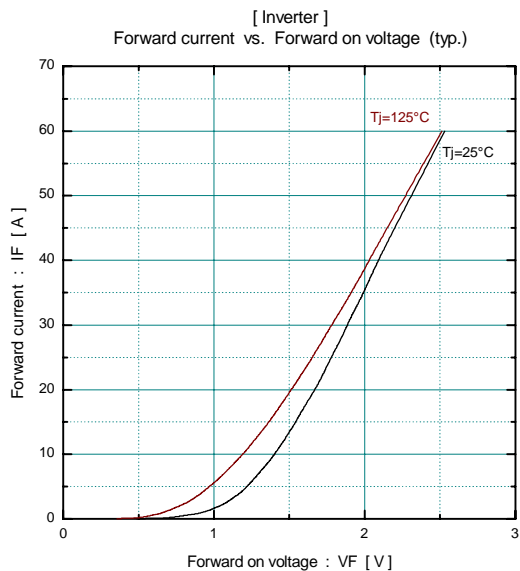

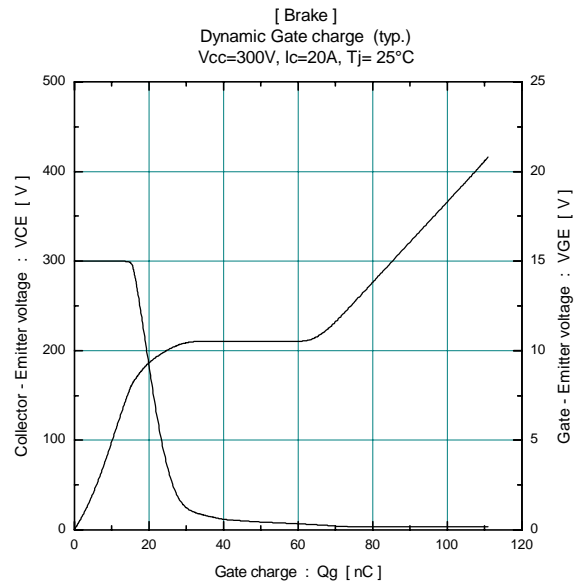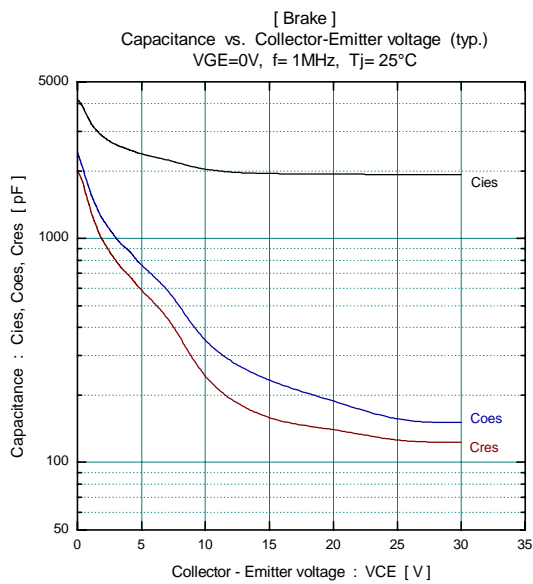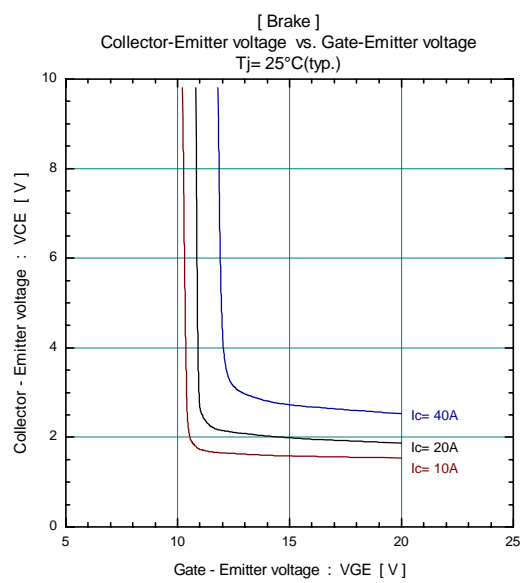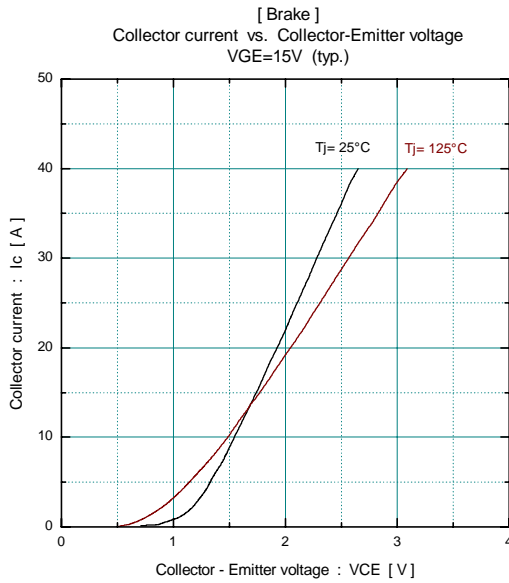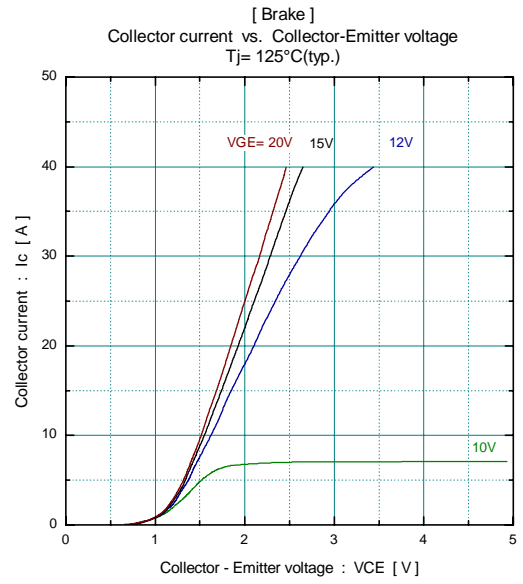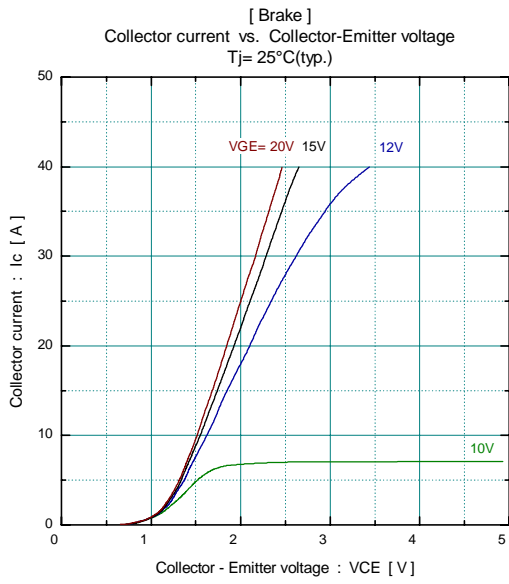

■ Outline Drawings, mm

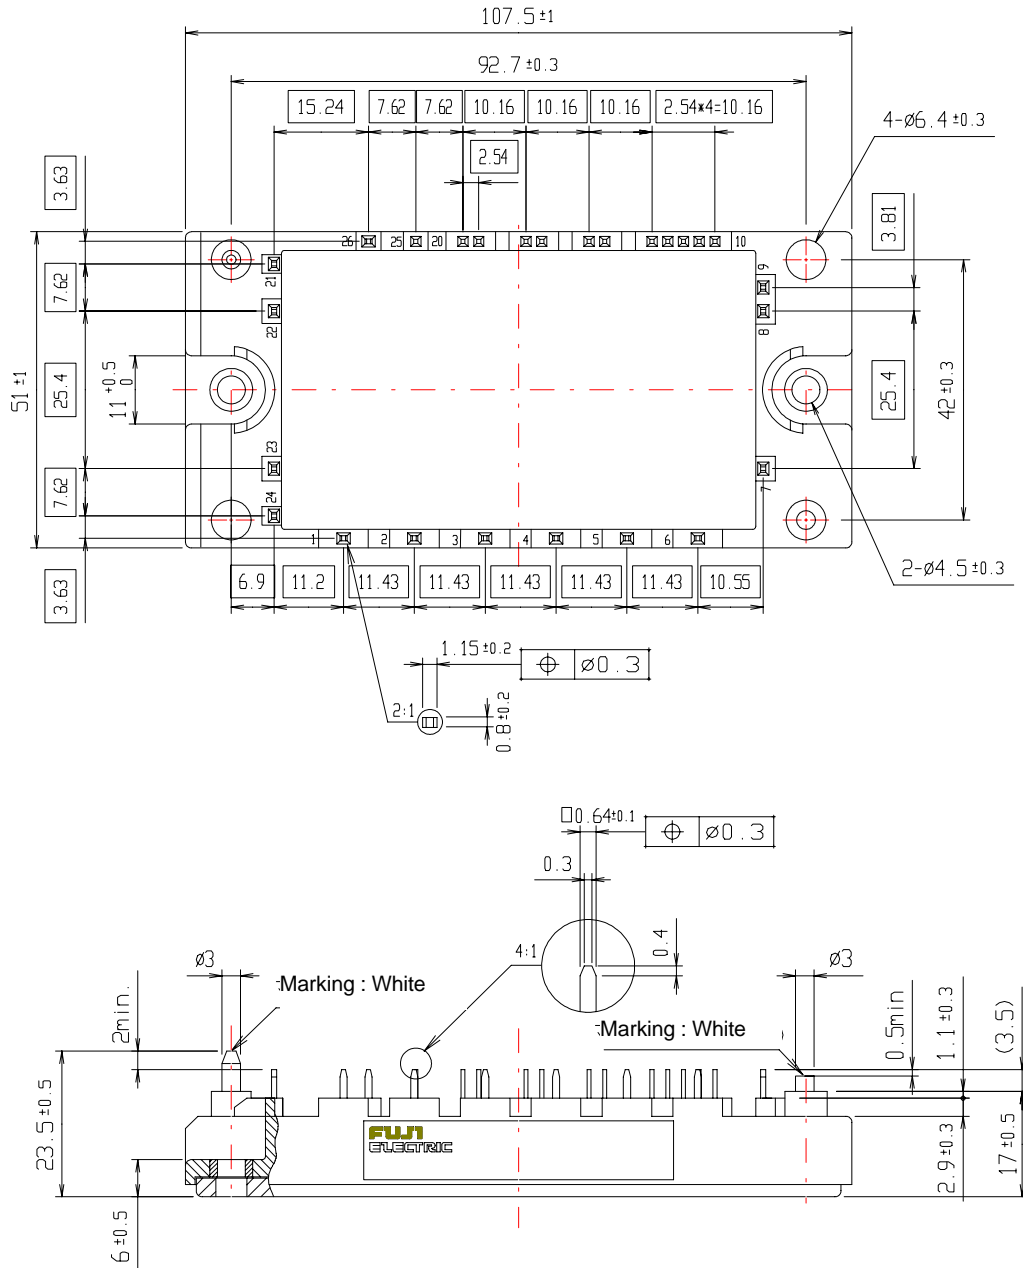

■ Equivalent Circuit Schematic

